

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R-3050-00-UNVE10-35-LG.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TEST] 1002
 [UL TEST] 11870572.01
 [ECN] 3056
 [TESTLAB] UL Verification Services Inc.
 [ISSUEDATE] 7/19/2017
 [MANUFAC] Tempo LLC
 [LUMCAT] C6R-3050-00-UNVE10-35-LG
 [LUMINAIRE] Light gray aluminum housing with lightly frosted lens
 [LAMP] Six (6) white LEDs (3500K) with 30 deg x 50 deg round optics
 [ELECTRICALS] 120.06 VAC, 0.0808 A, 0.9950 PF, 7.86% ATHD

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	656
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	68
Total Luminaire Watts	9.65624
Ballast Factor	1.00
CIE Type	Indirect
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.17 ft
Luminous Width (90-270)	1.00 ft
Luminous Height	0.06 ft



LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	0	0	0
55	0	0	0
65	0	0	0
75	0	0	0
85	0	16	43

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>
0.0	0.0	0.0	0.0	0.0	0.0
0.5	0.0	0.0	0.0	0.0	0.0
1.0	0.0	0.0	0.0	0.0	0.0
1.5	0.0	0.0	0.0	0.0	0.0
2.0	0.0	0.0	0.0	0.0	0.0
2.5	0.0	0.0	0.0	0.0	0.0
3.0	0.0	0.0	0.0	0.0	0.0
3.5	0.0	0.0	0.0	0.0	0.0
4.0	0.0	0.0	0.0	0.0	0.0
4.5	0.0	0.0	0.0	0.0	0.0
5.0	0.0	0.0	0.0	0.0	0.0
5.5	0.0	0.0	0.0	0.0	0.0
6.0	0.0	0.0	0.0	0.0	0.0
6.5	0.0	0.0	0.0	0.0	0.0
7.0	0.0	0.0	0.0	0.0	0.0
7.5	0.0	0.0	0.0	0.0	0.0
8.0	0.0	0.0	0.0	0.0	0.0
8.5	0.0	0.0	0.0	0.0	0.0
9.0	0.0	0.0	0.0	0.0	0.0
9.5	0.0	0.0	0.0	0.0	0.0
10.0	0.0	0.0	0.0	0.0	0.0
10.5	0.0	0.0	0.0	0.0	0.0
11.0	0.0	0.0	0.0	0.0	0.0
11.5	0.0	0.0	0.0	0.0	0.0
12.0	0.0	0.0	0.0	0.0	0.0
12.5	0.0	0.0	0.0	0.0	0.0
13.0	0.0	0.0	0.0	0.0	0.0
13.5	0.0	0.0	0.0	0.0	0.0
14.0	0.0	0.0	0.0	0.0	0.0
14.5	0.0	0.0	0.0	0.0	0.0
15.0	0.0	0.0	0.0	0.0	0.0
15.5	0.0	0.0	0.0	0.0	0.0
16.0	0.0	0.0	0.0	0.0	0.0
16.5	0.0	0.0	0.0	0.0	0.0
17.0	0.0	0.0	0.0	0.0	0.0
17.5	0.0	0.0	0.0	0.0	0.0
18.0	0.0	0.0	0.0	0.0	0.0
18.5	0.0	0.0	0.0	0.0	0.0
19.0	0.0	0.0	0.0	0.0	0.0
19.5	0.0	0.0	0.0	0.0	0.0
20.0	0.0	0.0	0.0	0.0	0.0
20.5	0.0	0.0	0.0	0.0	0.0
21.0	0.0	0.0	0.0	0.0	0.0
21.5	0.0	0.0	0.0	0.0	0.0
22.0	0.0	0.0	0.0	0.0	0.0
22.5	0.0	0.0	0.0	0.0	0.0
23.0	0.0	0.0	0.0	0.0	0.0
23.5	0.0	0.0	0.0	0.0	0.0
24.0	0.0	0.0	0.0	0.0	0.0
24.5	0.0	0.0	0.0	0.0	0.0
25.0	0.0	0.0	0.0	0.0	0.0
25.5	0.0	0.0	0.0	0.0	0.0
26.0	0.0	0.0	0.0	0.0	0.0
26.5	0.0	0.0	0.0	0.0	0.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R-3050-00-UNVE10-35-LG.IES

CANDELA TABULATION - (Cont.)

27.0	0.0	0.0	0.0	0.0	0.0
27.5	0.0	0.0	0.0	0.0	0.0
28.0	0.0	0.0	0.0	0.0	0.0
28.5	0.0	0.0	0.0	0.0	0.0
29.0	0.0	0.0	0.0	0.0	0.0
29.5	0.0	0.0	0.0	0.0	0.0
30.0	0.0	0.0	0.0	0.0	0.0
30.5	0.0	0.0	0.0	0.0	0.0
31.0	0.0	0.0	0.0	0.0	0.0
31.5	0.0	0.0	0.0	0.0	0.0
32.0	0.0	0.0	0.0	0.0	0.0
32.5	0.0	0.0	0.0	0.0	0.0
33.0	0.0	0.0	0.0	0.0	0.0
33.5	0.0	0.0	0.0	0.0	0.0
34.0	0.0	0.0	0.0	0.0	0.0
34.5	0.0	0.0	0.0	0.0	0.0
35.0	0.0	0.0	0.0	0.0	0.0
35.5	0.0	0.0	0.0	0.0	0.0
36.0	0.0	0.0	0.0	0.0	0.0
36.5	0.0	0.0	0.0	0.0	0.0
37.0	0.0	0.0	0.0	0.0	0.0
37.5	0.0	0.0	0.0	0.0	0.0
38.0	0.0	0.0	0.0	0.0	0.0
38.5	0.0	0.0	0.0	0.0	0.0
39.0	0.0	0.0	0.0	0.0	0.0
39.5	0.0	0.0	0.0	0.0	0.0
40.0	0.0	0.0	0.0	0.0	0.0
40.5	0.0	0.0	0.0	0.0	0.0
41.0	0.0	0.0	0.0	0.0	0.0
41.5	0.0	0.0	0.0	0.0	0.0
42.0	0.0	0.0	0.0	0.0	0.0
42.5	0.0	0.0	0.0	0.0	0.0
43.0	0.0	0.0	0.0	0.0	0.0
43.5	0.0	0.0	0.0	0.0	0.0
44.0	0.0	0.0	0.0	0.0	0.0
44.5	0.0	0.0	0.0	0.0	0.0
45.0	0.0	0.0	0.0	0.0	0.0
45.5	0.0	0.0	0.0	0.0	0.0
46.0	0.0	0.0	0.0	0.0	0.0
46.5	0.0	0.0	0.0	0.0	0.0
47.0	0.0	0.0	0.0	0.0	0.0
47.5	0.0	0.0	0.0	0.0	0.0
48.0	0.0	0.0	0.0	0.0	0.0
48.5	0.0	0.0	0.0	0.0	0.0
49.0	0.0	0.0	0.0	0.0	0.0
49.5	0.0	0.0	0.0	0.0	0.0
50.0	0.0	0.0	0.0	0.0	0.0
50.5	0.0	0.0	0.0	0.0	0.0
51.0	0.0	0.0	0.0	0.0	0.0
51.5	0.0	0.0	0.0	0.0	0.0
52.0	0.0	0.0	0.0	0.0	0.0
52.5	0.0	0.0	0.0	0.0	0.0
53.0	0.0	0.0	0.0	0.0	0.0
53.5	0.0	0.0	0.0	0.0	0.0
54.0	0.0	0.0	0.0	0.0	0.0
54.5	0.0	0.0	0.0	0.0	0.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R-3050-00-UNVE10-35-LG.IES

CANDELA TABULATION - (Cont.)

55.0	0.0	0.0	0.0	0.0	0.0
55.5	0.0	0.0	0.0	0.0	0.0
56.0	0.0	0.0	0.0	0.0	0.0
56.5	0.0	0.0	0.0	0.0	0.0
57.0	0.0	0.0	0.0	0.0	0.0
57.5	0.0	0.0	0.0	0.0	0.0
58.0	0.0	0.0	0.0	0.0	0.0
58.5	0.0	0.0	0.0	0.0	0.0
59.0	0.0	0.0	0.0	0.0	0.0
59.5	0.0	0.0	0.0	0.0	0.0
60.0	0.0	0.0	0.0	0.0	0.0
60.5	0.0	0.0	0.0	0.0	0.0
61.0	0.0	0.0	0.0	0.0	0.0
61.5	0.0	0.0	0.0	0.0	0.0
62.0	0.0	0.0	0.0	0.0	0.0
62.5	0.0	0.0	0.0	0.0	0.0
63.0	0.0	0.0	0.0	0.0	0.0
63.5	0.0	0.0	0.0	0.0	0.0
64.0	0.0	0.0	0.0	0.0	0.0
64.5	0.0	0.0	0.0	0.0	0.0
65.0	0.0	0.0	0.0	0.0	0.0
65.5	0.0	0.0	0.0	0.0	0.0
66.0	0.0	0.0	0.0	0.0	0.0
66.5	0.0	0.0	0.0	0.0	0.0
67.0	0.0	0.0	0.0	0.0	0.0
67.5	0.0	0.0	0.0	0.0	0.0
68.0	0.0	0.0	0.0	0.0	0.0
68.5	0.0	0.0	0.0	0.0	0.0
69.0	0.0	0.0	0.0	0.0	0.0
69.5	0.0	0.0	0.0	0.0	0.0
70.0	0.0	0.0	0.0	0.0	0.0
70.5	0.0	0.0	0.0	0.0	0.0
71.0	0.0	0.0	0.0	0.0	0.0
71.5	0.0	0.0	0.0	0.0	0.0
72.0	0.0	0.0	0.0	0.0	0.0
72.5	0.0	0.0	0.0	0.0	0.0
73.0	0.0	0.0	0.0	0.0	0.0
73.5	0.0	0.0	0.0	0.0	0.0
74.0	0.0	0.0	0.0	0.0	0.0
74.5	0.0	0.0	0.0	0.0	0.0
75.0	0.0	0.0	0.0	0.0	0.0
75.5	0.0	0.0	0.0	0.0	0.0
76.0	0.0	0.0	0.0	0.0	0.0
76.5	0.0	0.0	0.0	0.0	0.0
77.0	0.0	0.0	0.0	0.0	0.0
77.5	0.0	0.0	0.0	0.0	0.0
78.0	0.0	0.0	0.0	0.0	0.0
78.5	0.0	0.0	0.0	0.0	0.0
79.0	0.0	0.0	0.0	0.0	0.0
79.5	0.0	0.0	0.0	0.0	0.0
80.0	0.0	0.0	0.0	0.0	0.0
80.5	0.0	0.0	0.0	0.0	0.0
81.0	0.0	0.0	0.1	0.0	0.0
81.5	0.0	0.0	0.1	0.0	0.0
82.0	0.0	0.0	0.1	0.0	0.0
82.5	0.0	0.0	0.1	0.0	0.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R-3050-00-UNVE10-35-LG.IES

CANDELA TABULATION - (Cont.)

83.0	0.0	0.0	0.1	0.0	0.0
83.5	0.0	0.0	0.1	0.1	0.0
84.0	0.0	0.0	0.1	0.1	0.1
84.5	0.0	0.0	0.1	0.2	0.1
85.0	0.0	0.0	0.1	0.2	0.1
85.5	0.0	0.0	0.1	0.2	0.1
86.0	0.0	0.1	0.1	0.2	0.1
86.5	0.0	0.1	0.2	0.2	0.1
87.0	0.0	0.0	0.2	0.3	0.1
87.5	0.0	0.0	0.2	0.3	0.1
88.0	0.0	0.1	0.2	0.4	0.1
88.5	0.1	0.1	0.3	0.4	0.1
89.0	0.1	0.2	0.3	0.4	0.0
89.5	0.0	0.2	0.3	0.4	0.0
90.0	0.1	0.2	0.4	0.4	0.0
90.5	0.0	0.3	0.4	0.4	0.0
91.0	0.2	0.3	0.5	0.4	0.0
91.5	0.3	0.4	0.5	0.5	0.0
92.0	0.3	0.4	0.6	0.6	0.2
92.5	0.4	0.5	0.6	0.7	0.2
93.0	0.4	0.5	0.7	0.8	0.4
93.5	0.5	0.5	0.7	0.9	0.4
94.0	0.5	0.6	0.8	1.0	0.5
94.5	0.7	0.7	0.9	1.1	0.7
95.0	0.6	0.7	1.0	1.1	0.9
95.5	0.7	0.9	1.1	1.3	1.0
96.0	1.0	1.0	1.2	1.4	1.2
96.5	1.0	1.1	1.3	1.5	1.4
97.0	1.2	1.2	1.5	1.6	1.5
97.5	1.1	1.3	1.5	1.7	1.8
98.0	1.3	1.4	1.6	1.9	2.0
98.5	1.5	1.6	1.8	2.0	2.2
99.0	1.6	1.7	1.9	2.2	2.4
99.5	1.8	1.8	1.9	2.4	2.6
100.0	1.8	1.9	2.2	2.5	2.8
100.5	1.9	2.0	2.3	2.7	3.1
101.0	2.0	2.2	2.4	2.8	3.3
101.5	2.2	2.3	2.5	3.0	3.5
102.0	2.4	2.5	2.6	3.2	3.8
102.5	2.5	2.7	2.9	3.4	4.1
103.0	2.7	2.9	3.0	3.6	4.3
103.5	2.8	2.9	3.2	3.8	4.5
104.0	3.0	3.2	3.3	4.0	4.8
104.5	3.2	3.3	3.5	4.2	5.2
105.0	3.3	3.5	3.7	4.4	5.5
105.5	3.6	3.7	3.9	4.7	5.8
106.0	3.8	3.9	4.1	4.8	6.1
106.5	3.9	4.0	4.3	5.1	6.4
107.0	4.2	4.2	4.5	5.4	6.8
107.5	4.4	4.4	4.7	5.6	7.2
108.0	4.6	4.6	5.0	5.9	7.5
108.5	4.7	4.8	5.1	6.2	7.9
109.0	4.9	5.1	5.4	6.4	8.3
109.5	5.1	5.4	5.7	6.7	8.7
110.0	5.3	5.5	5.9	7.1	9.2
110.5	5.6	5.8	6.2	7.4	9.6

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R-3050-00-UNVE10-35-LG.IES

CANDELA TABULATION - (Cont.)

111.0	5.8	6.0	6.5	7.7	10.1
111.5	6.1	6.2	6.7	8.1	10.6
112.0	6.4	6.5	7.0	8.5	11.1
112.5	6.5	6.7	7.3	8.9	11.5
113.0	6.8	7.0	7.6	9.2	12.2
113.5	7.1	7.3	8.0	9.7	12.7
114.0	7.3	7.6	8.3	10.2	13.3
114.5	7.5	7.9	8.6	10.6	13.9
115.0	7.9	8.2	9.0	11.1	14.6
115.5	8.2	8.5	9.3	11.6	15.3
116.0	8.5	8.8	9.8	12.1	15.9
116.5	8.7	9.1	10.2	12.8	16.6
117.0	9.2	9.4	10.5	13.3	17.3
117.5	9.4	9.8	11.0	14.0	18.2
118.0	9.8	10.2	11.4	14.6	19.0
118.5	10.2	10.5	11.9	15.3	19.8
119.0	10.5	10.9	12.4	16.1	20.9
119.5	10.9	11.2	12.8	16.8	21.8
120.0	11.1	11.7	13.3	17.6	22.8
120.5	11.6	12.1	13.9	18.5	23.9
121.0	11.9	12.5	14.4	19.4	25.0
121.5	12.3	12.9	15.0	20.3	26.2
122.0	12.8	13.4	15.6	21.3	27.5
122.5	13.2	13.9	16.2	22.4	28.8
123.0	13.6	14.3	16.8	23.4	30.2
123.5	14.0	14.9	17.6	24.6	31.7
124.0	14.5	15.5	18.3	25.9	33.6
124.5	14.9	15.9	19.0	27.2	35.3
125.0	15.5	16.5	19.8	28.4	36.9
125.5	16.0	17.1	20.5	29.8	38.8
126.0	16.5	17.5	21.2	31.3	40.7
126.5	17.0	18.2	22.0	32.8	42.7
127.0	17.6	18.7	22.8	34.4	44.7
127.5	18.1	19.3	23.7	36.0	47.1
128.0	18.7	19.9	24.6	37.7	49.4
128.5	19.4	20.6	25.5	39.5	52.0
129.0	19.9	21.2	26.6	41.5	54.5
129.5	20.5	21.9	27.7	43.5	57.2
130.0	21.3	22.6	28.9	45.6	60.0
130.5	21.8	23.3	30.1	47.9	63.1
131.0	22.7	24.1	31.4	50.2	66.0
131.5	23.5	24.9	32.7	52.6	69.3
132.0	24.3	25.7	34.2	55.1	72.7
132.5	25.1	26.7	35.6	57.8	76.2
133.0	25.9	27.6	37.2	60.6	79.9
133.5	26.8	28.5	38.9	63.5	83.8
134.0	27.7	29.6	40.6	66.7	87.8
134.5	28.6	30.7	42.5	69.9	92.1
135.0	29.5	31.8	44.4	73.2	96.6
135.5	30.6	32.9	46.4	76.8	101.2
136.0	31.6	34.2	48.6	80.5	106.1
136.5	32.7	35.5	50.8	84.3	111.2
137.0	33.9	36.9	53.2	88.4	116.4
137.5	35.1	38.5	55.8	92.6	122.1
138.0	36.4	40.0	58.4	97.0	128.0
138.5	37.6	41.7	61.2	101.8	134.2

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R-3050-00-UNVE10-35-LG.IES

CANDELA TABULATION - (Cont.)

139.0	39.1	43.6	64.2	106.8	140.6
139.5	40.6	45.4	67.4	112.1	147.1
140.0	42.2	47.4	70.7	117.4	154.3
140.5	43.9	49.6	74.2	122.9	161.5
141.0	45.7	51.9	77.9	129.0	169.3
141.5	47.7	54.4	81.7	135.5	177.1
142.0	49.8	57.0	85.9	141.8	185.2
142.5	52.1	59.9	90.2	148.7	193.8
143.0	54.5	62.9	94.9	156.0	202.8
143.5	57.0	66.2	99.7	163.5	212.4
144.0	59.8	69.6	104.8	171.6	221.8
144.5	62.9	73.2	110.2	179.8	231.8
145.0	66.0	77.2	116.1	188.6	242.6
145.5	69.6	81.4	122.2	197.6	253.2
146.0	73.4	85.9	128.5	207.1	264.8
146.5	77.5	90.7	135.3	217.2	276.4
147.0	81.7	95.8	142.5	227.8	288.5
147.5	86.7	101.2	150.0	238.4	301.0
148.0	91.6	107.0	158.0	250.0	313.6
148.5	97.0	113.3	166.3	261.7	326.3
149.0	102.7	119.8	175.2	274.3	340.1
149.5	109.3	126.9	184.3	286.8	354.2
150.0	116.1	134.3	193.9	300.2	368.4
150.5	123.2	142.0	204.1	314.1	383.5
151.0	130.8	150.3	215.0	328.4	398.7
151.5	139.0	159.0	226.1	343.0	414.3
152.0	147.6	168.4	237.8	358.5	430.3
152.5	156.3	178.4	250.5	374.8	447.1
153.0	166.3	188.9	263.1	391.1	464.3
153.5	176.5	200.0	276.6	407.8	481.3
154.0	187.4	211.4	290.8	425.5	499.3
154.5	198.7	223.6	305.5	443.2	517.4
155.0	210.7	236.5	320.5	462.2	536.7
155.5	223.3	250.0	336.7	481.4	555.6
156.0	236.8	264.3	353.3	501.2	575.6
156.5	251.1	279.3	370.6	521.0	595.5
157.0	266.3	295.2	389.1	541.6	615.3
157.5	281.5	311.7	407.6	563.0	635.6
158.0	297.5	328.7	427.2	584.3	655.8
158.5	314.6	347.1	448.0	606.2	677.5
159.0	332.8	366.0	468.7	628.7	698.9
159.5	351.7	385.8	490.9	651.2	721.3
160.0	371.4	406.6	513.7	674.5	743.5
160.5	392.6	428.1	536.9	698.2	765.2
161.0	413.5	450.3	560.6	721.5	786.6
161.5	436.2	474.0	585.4	745.5	808.3
162.0	460.0	498.3	611.1	769.8	829.1
162.5	484.0	523.6	637.3	794.2	852.5
163.0	509.3	549.4	663.6	817.2	873.9
163.5	536.2	576.6	690.8	839.9	898.5
164.0	563.9	604.7	718.2	865.6	921.2
164.5	592.8	633.3	746.2	889.6	940.5
165.0	622.0	663.1	774.8	914.2	960.4
165.5	652.2	693.3	803.7	938.7	985.4
166.0	684.3	724.1	830.5	960.5	1006.0
166.5	716.0	755.7	858.7	984.0	1028.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R-3050-00-UNVE10-35-LG.IES

CANDELA TABULATION - (Cont.)

167.0	748.8	787.8	888.0	1006.0	1048.0
167.5	782.7	819.7	915.8	1030.0	1068.0
168.0	816.7	851.3	942.1	1052.0	1090.0
168.5	850.7	883.5	970.5	1075.0	1109.0
169.0	884.2	916.1	999.3	1096.0	1128.0
169.5	917.3	946.8	1026.0	1118.0	1144.0
170.0	950.6	977.4	1054.0	1138.0	1165.0
170.5	984.7	1011.0	1079.0	1157.0	1181.0
171.0	1019.0	1042.0	1105.0	1176.0	1198.0
171.5	1052.0	1073.0	1129.0	1194.0	1213.0
172.0	1084.0	1103.0	1154.0	1212.0	1230.0
172.5	1114.0	1132.0	1176.0	1228.0	1243.0
173.0	1145.0	1159.0	1198.0	1244.0	1256.0
173.5	1175.0	1186.0	1219.0	1259.0	1270.0
174.0	1200.0	1211.0	1238.0	1273.0	1282.0
174.5	1226.0	1234.0	1257.0	1286.0	1293.0
175.0	1249.0	1256.0	1273.0	1298.0	1302.0
175.5	1272.0	1276.0	1288.0	1309.0	1311.0
176.0	1293.0	1293.0	1303.0	1318.0	1320.0
176.5	1309.0	1308.0	1315.0	1326.0	1326.0
177.0	1326.0	1323.0	1325.0	1334.0	1334.0
177.5	1340.0	1336.0	1334.0	1341.0	1339.0
178.0	1349.0	1346.0	1343.0	1346.0	1345.0
178.5	1358.0	1354.0	1348.0	1351.0	1347.0
179.0	1364.0	1359.0	1352.0	1354.0	1348.0
179.5	1368.0	1363.0	1355.0	1355.0	1350.0
180.0	1359.0	1359.0	1359.0	1359.0	1359.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R-3050-00-UNVE10-35-LG.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	0.00	N.A.	0.00
0-30	0.00	N.A.	0.00
0-40	0.00	N.A.	0.00
0-60	0.00	N.A.	0.00
0-80	0.00	N.A.	0.00
0-90	0.11	N.A.	0.00
10-90	0.11	N.A.	0.00
20-40	0.00	N.A.	0.00
20-50	0.00	N.A.	0.00
40-70	0.00	N.A.	0.00
60-80	0.00	N.A.	0.00
70-80	0.00	N.A.	0.00
80-90	0.11	N.A.	0.00
90-110	5.46	N.A.	0.80
90-120	15.47	N.A.	2.40
90-130	36.22	N.A.	5.50
90-150	164.25	N.A.	25.00
90-180	655.94	N.A.	100.00
110-180	650.47	N.A.	99.10
0-180	656.05	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	0.00
10-20	0.00
20-30	0.00
30-40	0.00
40-50	0.00
50-60	0.00
60-70	0.00
70-80	0.00
80-90	0.11
90-100	1.13
100-110	4.33
110-120	10.01
120-130	20.75
130-140	42.08
140-150	85.94
150-160	161.19
160-170	215.84
170-180	114.66


IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R-3050-00-UNVE10-35-LG.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10	0
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8	0
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7	0
3	72	63	56	51	61	54	49	44	37	34	31	21	20	18	7	6	6	0
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	0
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4	0
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4	0
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3	0
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	0
9	43	32	25	20	37	28	22	18	19	15	13	11	9	8	4	3	3	0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	0

POLAR GRAPH

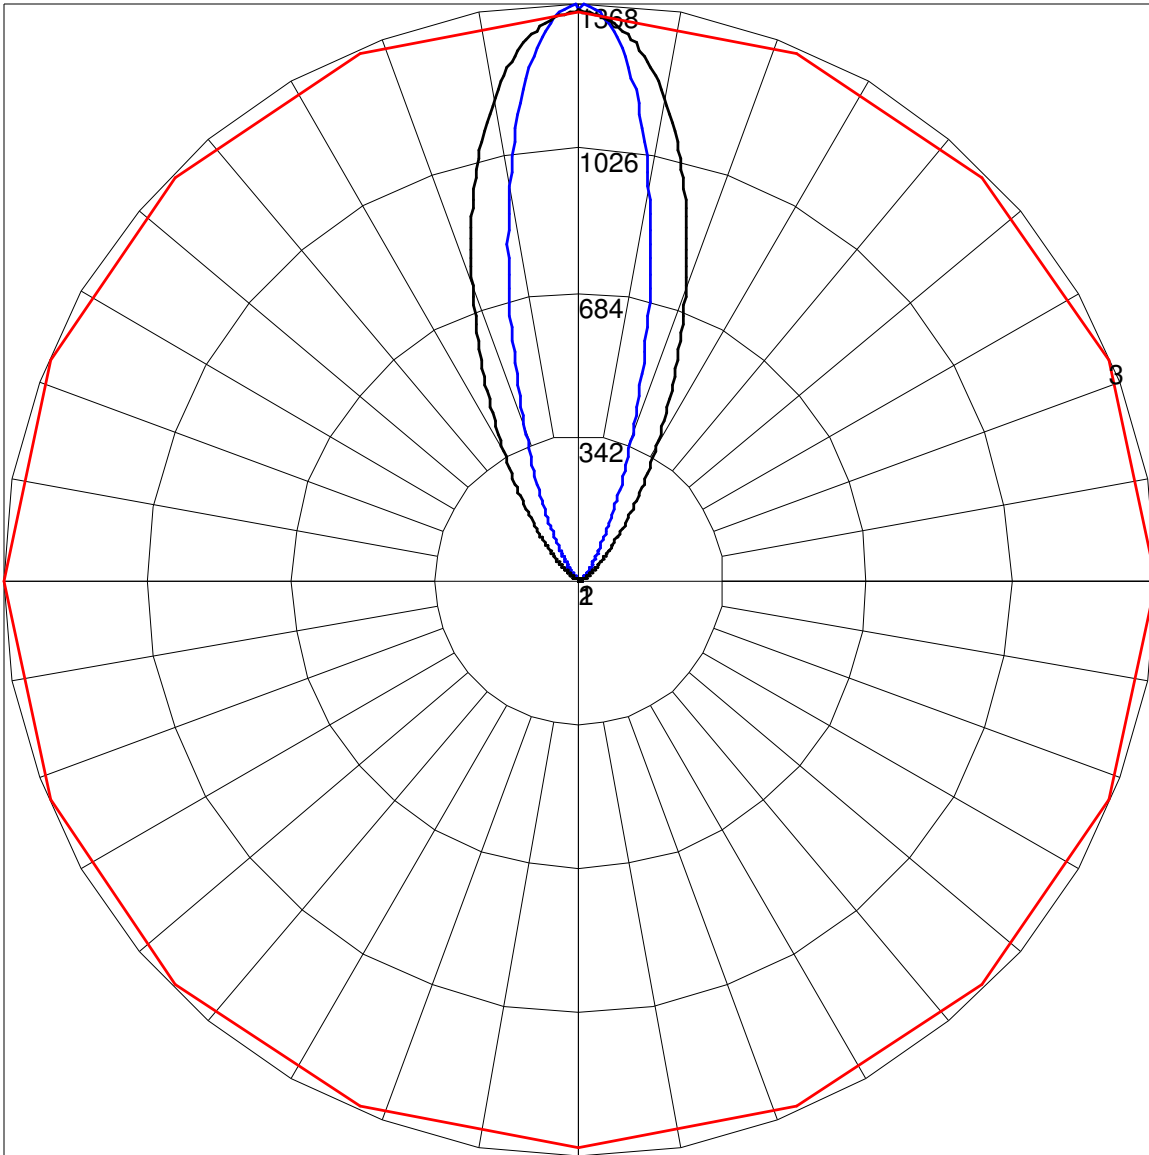

Maximum Candela = 1368 Located At Horizontal Angle = 0, Vertical Angle = 179.5
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Vertical Plane Through Horizontal Angles (90 - 270)
3 - Horizontal Cone Through Vertical Angle (179.5) (Through Max. Cd.)