

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R-5030-00-UNVE10-35-LG.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TEST] 1003
 [UL TEST] 11870572.03
 [ECN] 3056
 [TESTLAB] UL Verification Services Inc.
 [ISSUEDATE] 7/21/2017
 [MANUFAC] Tempo LLC
 [LUMCAT] C6R-5030-00-UNVE10-35-LG
 [LUMINAIRE] Light gray aluminum housing with lightly frosted lens
 [LAMP] Six (6) white LEDs (3500K) with 50 deg x 30 deg round optics
 [ELECTRICALS] 120.05 VAC, 0.0824 A, 0.9946 PF, 8.26% ATHD

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	666
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	68
Total Luminaire Watts	9.84325
Ballast Factor	1.00
CIE Type	Indirect
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.17 ft
Luminous Width (90-270)	1.00 ft
Luminous Height	0.06 ft



LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	0	0	0
55	0	0	0
65	34	0	0
75	52	23	0
85	97	81	0

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>
0.0	0.0	0.0	0.0	0.0	0.0
0.5	0.0	0.0	0.0	0.0	0.0
1.0	0.0	0.0	0.0	0.0	0.0
1.5	0.0	0.0	0.0	0.0	0.0
2.0	0.0	0.0	0.0	0.0	0.0
2.5	0.0	0.0	0.0	0.0	0.0
3.0	0.0	0.0	0.0	0.0	0.0
3.5	0.0	0.0	0.0	0.0	0.0
4.0	0.0	0.0	0.0	0.0	0.0
4.5	0.0	0.0	0.0	0.0	0.0
5.0	0.0	0.0	0.0	0.0	0.0
5.5	0.0	0.0	0.0	0.0	0.0
6.0	0.0	0.0	0.0	0.0	0.0
6.5	0.0	0.0	0.0	0.0	0.0
7.0	0.0	0.0	0.0	0.0	0.0
7.5	0.0	0.0	0.0	0.0	0.0
8.0	0.0	0.0	0.0	0.0	0.0
8.5	0.0	0.0	0.0	0.0	0.0
9.0	0.0	0.0	0.0	0.0	0.0
9.5	0.0	0.0	0.0	0.0	0.0
10.0	0.0	0.0	0.0	0.0	0.0
10.5	0.0	0.0	0.0	0.0	0.0
11.0	0.0	0.0	0.0	0.0	0.0
11.5	0.0	0.0	0.0	0.0	0.0
12.0	0.0	0.0	0.0	0.0	0.0
12.5	0.0	0.0	0.0	0.0	0.0
13.0	0.0	0.0	0.0	0.0	0.0
13.5	0.0	0.0	0.0	0.0	0.0
14.0	0.0	0.0	0.0	0.0	0.0
14.5	0.0	0.0	0.0	0.0	0.0
15.0	0.0	0.0	0.0	0.0	0.0
15.5	0.0	0.0	0.0	0.0	0.0
16.0	0.0	0.0	0.0	0.0	0.0
16.5	0.0	0.0	0.0	0.0	0.0
17.0	0.0	0.0	0.0	0.0	0.0
17.5	0.0	0.0	0.0	0.0	0.0
18.0	0.0	0.0	0.0	0.0	0.0
18.5	0.0	0.0	0.0	0.0	0.0
19.0	0.0	0.0	0.0	0.0	0.0
19.5	0.0	0.0	0.0	0.0	0.0
20.0	0.0	0.0	0.0	0.0	0.0
20.5	0.0	0.0	0.0	0.0	0.0
21.0	0.0	0.0	0.0	0.0	0.0
21.5	0.0	0.0	0.0	0.0	0.0
22.0	0.0	0.0	0.0	0.0	0.0
22.5	0.0	0.0	0.0	0.0	0.0
23.0	0.0	0.0	0.0	0.0	0.0
23.5	0.0	0.0	0.0	0.0	0.0
24.0	0.0	0.0	0.0	0.0	0.0
24.5	0.0	0.0	0.0	0.0	0.0
25.0	0.0	0.0	0.0	0.0	0.0
25.5	0.0	0.0	0.0	0.0	0.0
26.0	0.0	0.0	0.0	0.0	0.0
26.5	0.0	0.0	0.0	0.0	0.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R-5030-00-UNVE10-35-LG.IES

CANDELA TABULATION - (Cont.)

27.0	0.0	0.0	0.0	0.0	0.0
27.5	0.0	0.0	0.0	0.0	0.0
28.0	0.0	0.0	0.0	0.0	0.0
28.5	0.0	0.0	0.0	0.0	0.0
29.0	0.0	0.0	0.0	0.0	0.0
29.5	0.0	0.0	0.0	0.0	0.0
30.0	0.0	0.0	0.0	0.0	0.0
30.5	0.0	0.0	0.0	0.0	0.0
31.0	0.0	0.0	0.0	0.0	0.0
31.5	0.0	0.0	0.0	0.0	0.0
32.0	0.0	0.0	0.0	0.0	0.0
32.5	0.0	0.0	0.0	0.0	0.0
33.0	0.0	0.0	0.0	0.0	0.0
33.5	0.0	0.0	0.0	0.0	0.0
34.0	0.0	0.0	0.0	0.0	0.0
34.5	0.0	0.0	0.0	0.0	0.0
35.0	0.0	0.0	0.0	0.0	0.0
35.5	0.0	0.0	0.0	0.0	0.0
36.0	0.0	0.0	0.0	0.0	0.0
36.5	0.0	0.0	0.0	0.0	0.0
37.0	0.0	0.0	0.0	0.0	0.0
37.5	0.0	0.0	0.0	0.0	0.0
38.0	0.0	0.0	0.0	0.0	0.0
38.5	0.0	0.0	0.0	0.0	0.0
39.0	0.0	0.0	0.0	0.0	0.0
39.5	0.0	0.0	0.0	0.0	0.0
40.0	0.0	0.0	0.0	0.0	0.0
40.5	0.0	0.0	0.0	0.0	0.0
41.0	0.0	0.0	0.0	0.0	0.0
41.5	0.0	0.0	0.0	0.0	0.0
42.0	0.0	0.0	0.0	0.0	0.0
42.5	0.0	0.0	0.0	0.0	0.0
43.0	0.0	0.0	0.0	0.0	0.0
43.5	0.0	0.0	0.0	0.0	0.0
44.0	0.0	0.0	0.0	0.0	0.0
44.5	0.0	0.0	0.0	0.0	0.0
45.0	0.0	0.0	0.0	0.0	0.0
45.5	0.0	0.0	0.0	0.0	0.0
46.0	0.0	0.0	0.0	0.0	0.0
46.5	0.0	0.0	0.0	0.0	0.0
47.0	0.0	0.0	0.0	0.0	0.0
47.5	0.0	0.0	0.0	0.0	0.0
48.0	0.0	0.0	0.0	0.0	0.0
48.5	0.0	0.0	0.0	0.0	0.0
49.0	0.0	0.0	0.0	0.0	0.0
49.5	0.0	0.0	0.0	0.0	0.0
50.0	0.0	0.0	0.0	0.0	0.0
50.5	0.0	0.0	0.0	0.0	0.0
51.0	0.0	0.0	0.0	0.0	0.0
51.5	0.0	0.0	0.0	0.0	0.0
52.0	0.0	0.0	0.0	0.0	0.0
52.5	0.0	0.0	0.0	0.0	0.0
53.0	0.0	0.0	0.0	0.0	0.0
53.5	0.0	0.0	0.0	0.0	0.0
54.0	0.0	0.0	0.0	0.0	0.0
54.5	0.0	0.0	0.0	0.0	0.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R-5030-00-UNVE10-35-LG.IES

CANDELA TABULATION - (Cont.)

55.0	0.0	0.0	0.0	0.0	0.0
55.5	0.0	0.0	0.0	0.0	0.0
56.0	0.0	0.0	0.0	0.0	0.0
56.5	0.0	0.0	0.0	0.0	0.0
57.0	0.0	0.0	0.0	0.0	0.0
57.5	0.0	0.0	0.0	0.0	0.0
58.0	0.1	0.0	0.0	0.0	0.0
58.5	0.1	0.0	0.0	0.0	0.0
59.0	0.2	0.0	0.0	0.0	0.0
59.5	0.2	0.1	0.0	0.0	0.0
60.0	0.3	0.1	0.0	0.0	0.0
60.5	0.3	0.1	0.0	0.0	0.0
61.0	0.3	0.2	0.0	0.0	0.0
61.5	0.3	0.2	0.0	0.0	0.0
62.0	0.3	0.2	0.0	0.0	0.0
62.5	0.4	0.3	0.0	0.0	0.0
63.0	0.4	0.2	0.0	0.0	0.0
63.5	0.4	0.3	0.0	0.0	0.0
64.0	0.4	0.3	0.0	0.0	0.0
64.5	0.5	0.3	0.0	0.0	0.0
65.0	0.4	0.3	0.0	0.0	0.0
65.5	0.5	0.3	0.0	0.0	0.0
66.0	0.5	0.4	0.0	0.0	0.0
66.5	0.5	0.4	0.0	0.0	0.0
67.0	0.5	0.4	0.0	0.0	0.0
67.5	0.5	0.4	0.1	0.0	0.0
68.0	0.5	0.4	0.1	0.0	0.0
68.5	0.5	0.4	0.1	0.0	0.0
69.0	0.5	0.4	0.1	0.0	0.0
69.5	0.5	0.4	0.1	0.0	0.0
70.0	0.5	0.4	0.1	0.0	0.0
70.5	0.5	0.4	0.1	0.0	0.0
71.0	0.5	0.4	0.1	0.0	0.0
71.5	0.5	0.4	0.1	0.0	0.0
72.0	0.5	0.4	0.1	0.0	0.0
72.5	0.5	0.4	0.2	0.0	0.0
73.0	0.5	0.4	0.2	0.0	0.0
73.5	0.5	0.4	0.2	0.0	0.0
74.0	0.5	0.4	0.2	0.0	0.0
74.5	0.5	0.5	0.2	0.0	0.0
75.0	0.5	0.4	0.2	0.0	0.0
75.5	0.5	0.4	0.2	0.0	0.0
76.0	0.5	0.5	0.2	0.0	0.0
76.5	0.5	0.5	0.2	0.0	0.0
77.0	0.5	0.5	0.2	0.0	0.0
77.5	0.5	0.5	0.3	0.0	0.0
78.0	0.5	0.5	0.3	0.0	0.0
78.5	0.5	0.5	0.3	0.0	0.0
79.0	0.5	0.5	0.3	0.0	0.0
79.5	0.5	0.5	0.3	0.0	0.0
80.0	0.6	0.5	0.3	0.0	0.0
80.5	0.6	0.6	0.3	0.0	0.0
81.0	0.6	0.6	0.3	0.0	0.0
81.5	0.6	0.6	0.4	0.0	0.0
82.0	0.6	0.6	0.4	0.0	0.0
82.5	0.6	0.6	0.4	0.0	0.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R-5030-00-UNVE10-35-LG.IES

CANDELA TABULATION - (Cont.)

83.0	0.6	0.6	0.4	0.0	0.0
83.5	0.7	0.6	0.4	0.0	0.0
84.0	0.7	0.7	0.4	0.0	0.0
84.5	0.7	0.7	0.5	0.0	0.0
85.0	0.7	0.7	0.5	0.0	0.0
85.5	0.7	0.7	0.6	0.1	0.0
86.0	0.8	0.7	0.6	0.1	0.0
86.5	0.8	0.8	0.6	0.1	0.0
87.0	0.9	0.8	0.6	0.1	0.0
87.5	0.9	0.8	0.7	0.2	0.0
88.0	0.9	0.9	0.7	0.2	0.0
88.5	0.9	0.9	0.7	0.3	0.0
89.0	1.0	0.9	0.8	0.4	0.0
89.5	1.0	1.0	0.8	0.4	0.0
90.0	1.1	1.0	0.9	0.4	0.0
90.5	1.2	1.1	1.0	0.5	0.0
91.0	1.2	1.2	1.1	0.6	0.0
91.5	1.3	1.2	1.1	0.6	0.0
92.0	1.4	1.3	1.2	0.7	0.0
92.5	1.5	1.4	1.3	0.8	0.0
93.0	1.6	1.5	1.4	0.9	0.1
93.5	1.7	1.6	1.5	1.0	0.1
94.0	1.8	1.7	1.5	1.1	0.2
94.5	1.9	1.8	1.7	1.2	0.4
95.0	2.0	1.9	1.7	1.3	0.5
95.5	2.1	1.9	1.8	1.5	0.6
96.0	2.2	2.1	2.0	1.6	0.8
96.5	2.4	2.2	2.1	1.7	1.0
97.0	2.5	2.3	2.2	1.9	1.2
97.5	2.7	2.5	2.3	2.0	1.3
98.0	2.8	2.6	2.5	2.2	1.5
98.5	2.9	2.7	2.6	2.3	1.7
99.0	3.1	2.9	2.7	2.5	1.8
99.5	3.3	3.0	2.9	2.7	2.0
100.0	3.4	3.2	3.1	2.8	2.2
100.5	3.6	3.3	3.2	3.0	2.4
101.0	3.8	3.5	3.4	3.2	2.6
101.5	3.9	3.6	3.6	3.4	2.8
102.0	4.1	3.8	3.7	3.6	3.0
102.5	4.3	4.0	3.9	3.7	3.2
103.0	4.5	4.2	4.1	3.9	3.5
103.5	4.7	4.3	4.2	4.1	3.7
104.0	4.9	4.5	4.5	4.3	3.9
104.5	5.1	4.7	4.7	4.5	4.1
105.0	5.3	4.9	4.9	4.7	4.4
105.5	5.6	5.1	5.1	5.0	4.6
106.0	5.7	5.3	5.3	5.2	4.8
106.5	6.0	5.5	5.5	5.4	5.0
107.0	6.3	5.8	5.7	5.6	5.3
107.5	6.4	6.0	6.0	5.8	5.5
108.0	6.7	6.3	6.2	6.0	5.8
108.5	7.0	6.5	6.4	6.3	6.0
109.0	7.3	6.8	6.7	6.5	6.3
109.5	7.7	7.1	7.0	6.8	6.6
110.0	7.9	7.4	7.2	7.0	6.8
110.5	8.3	7.7	7.5	7.2	7.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R-5030-00-UNVE10-35-LG.IES

CANDELA TABULATION - (Cont.)

111.0	8.6	8.0	7.8	7.4	7.3
111.5	9.0	8.3	8.1	7.7	7.5
112.0	9.4	8.7	8.4	7.9	7.8
112.5	9.8	9.1	8.7	8.2	8.1
113.0	10.2	9.4	9.0	8.4	8.4
113.5	10.7	9.8	9.4	8.7	8.7
114.0	11.2	10.3	9.7	8.9	8.9
114.5	11.6	10.7	10.1	9.2	9.2
115.0	12.1	11.2	10.4	9.5	9.5
115.5	12.7	11.7	10.8	9.8	9.8
116.0	13.3	12.2	11.2	10.1	10.1
116.5	13.9	12.8	11.5	10.4	10.4
117.0	14.5	13.4	12.0	10.7	10.6
117.5	15.3	14.0	12.4	11.1	10.9
118.0	15.9	14.7	12.8	11.4	11.2
118.5	16.7	15.4	13.3	11.7	11.4
119.0	17.6	16.1	13.8	12.1	11.8
119.5	18.5	16.9	14.2	12.4	12.0
120.0	19.5	17.7	14.7	12.8	12.4
120.5	20.5	18.6	15.3	13.2	12.7
121.0	21.6	19.5	15.8	13.5	13.1
121.5	22.8	20.4	16.3	14.0	13.3
122.0	24.1	21.5	16.9	14.4	13.7
122.5	25.4	22.5	17.5	14.8	14.1
123.0	26.8	23.6	18.1	15.2	14.5
123.5	28.3	24.8	18.7	15.7	14.8
124.0	29.8	26.0	19.4	16.1	15.3
124.5	31.5	27.4	20.1	16.7	15.8
125.0	33.3	28.8	20.9	17.4	16.2
125.5	35.2	30.1	21.5	17.9	17.0
126.0	37.0	31.6	22.4	18.4	17.4
126.5	39.2	33.1	23.2	18.9	17.8
127.0	41.5	34.7	24.0	19.5	18.4
127.5	43.7	36.3	24.8	20.0	18.9
128.0	46.0	38.0	25.6	20.5	19.4
128.5	48.5	39.8	26.5	21.0	20.0
129.0	51.1	41.6	27.5	21.6	20.5
129.5	53.7	43.5	28.5	22.2	21.0
130.0	56.5	45.6	29.5	22.9	21.7
130.5	59.3	47.8	30.6	23.6	22.3
131.0	62.4	49.9	31.7	24.2	23.0
131.5	65.6	52.2	33.0	25.0	23.6
132.0	69.0	54.8	34.4	25.8	24.4
132.5	72.5	57.3	35.7	26.6	25.1
133.0	76.2	60.0	37.2	27.5	25.8
133.5	80.0	62.9	38.7	28.3	26.6
134.0	84.0	65.8	40.4	29.2	27.5
134.5	88.1	68.9	42.2	30.2	28.3
135.0	92.6	72.3	44.0	31.3	29.2
135.5	97.2	75.7	46.0	32.3	30.1
136.0	101.8	79.3	48.1	33.5	31.1
136.5	107.0	83.2	50.3	34.7	32.1
137.0	112.2	87.1	52.6	36.0	33.2
137.5	117.4	91.5	55.1	37.3	34.3
138.0	123.4	95.9	57.9	38.8	35.5
138.5	129.5	100.7	60.6	40.4	36.8

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R-5030-00-UNVE10-35-LG.IES

CANDELA TABULATION - (Cont.)

139.0	135.5	105.5	63.5	42.0	38.1
139.5	142.6	110.6	66.6	43.8	39.5
140.0	149.2	116.2	70.0	45.8	41.0
140.5	156.5	121.8	73.5	47.8	42.6
141.0	163.6	127.8	77.2	50.0	44.4
141.5	171.7	134.0	81.1	52.4	46.3
142.0	179.6	140.6	85.2	54.9	48.3
142.5	188.2	147.6	89.6	57.7	50.4
143.0	197.2	154.6	94.3	60.6	52.8
143.5	206.3	162.2	99.0	63.8	55.2
144.0	216.2	169.9	104.2	67.1	57.9
144.5	225.7	178.1	109.7	70.7	60.8
145.0	236.2	186.7	115.3	74.6	64.0
145.5	247.0	195.8	121.5	78.7	67.6
146.0	258.5	205.3	127.9	83.2	71.3
146.5	270.4	215.1	134.6	87.9	75.3
147.0	282.0	225.5	141.9	93.0	79.6
147.5	295.3	236.6	149.4	98.2	84.2
148.0	308.5	247.7	157.2	104.2	89.0
148.5	322.8	259.4	165.5	110.3	94.4
149.0	336.6	271.8	174.4	116.8	100.2
149.5	351.2	285.2	183.6	123.9	106.4
150.0	366.6	298.1	193.6	131.2	113.0
150.5	382.5	312.0	203.7	139.4	120.2
151.0	398.7	326.4	214.8	148.0	127.5
151.5	414.9	341.2	226.3	157.0	135.7
152.0	431.9	357.3	238.3	166.5	144.5
152.5	450.3	373.1	250.8	176.8	153.8
153.0	467.6	390.1	264.4	187.3	163.5
153.5	486.5	407.5	277.9	198.8	173.6
154.0	505.5	425.2	292.6	210.8	184.7
154.5	524.0	443.7	307.7	223.6	196.2
155.0	544.8	462.7	323.4	237.0	208.7
155.5	564.6	482.3	340.2	251.0	221.5
156.0	584.5	502.6	357.6	265.9	235.3
156.5	605.2	523.3	375.8	281.2	249.7
157.0	625.8	544.2	394.3	297.5	264.7
157.5	647.8	565.7	413.9	314.4	280.5
158.0	669.0	588.2	434.3	332.4	297.1
158.5	691.0	610.6	455.0	351.3	314.7
159.0	714.1	634.0	477.0	370.7	333.6
159.5	736.3	657.3	499.9	391.5	352.9
160.0	759.9	681.3	523.2	412.6	373.1
160.5	783.0	706.1	546.4	434.8	394.3
161.0	806.8	730.4	570.9	458.5	416.5
161.5	831.0	755.7	596.9	482.7	440.2
162.0	854.1	780.9	622.5	508.2	464.3
162.5	878.4	805.4	649.2	535.0	489.9
163.0	900.6	831.4	676.8	561.8	515.9
163.5	924.7	856.6	704.2	589.7	543.9
164.0	945.6	882.4	732.6	618.1	571.9
164.5	973.4	907.0	761.6	647.9	602.3
165.0	996.3	933.5	790.6	678.7	632.1
165.5	1023.0	959.6	819.6	709.3	664.7
166.0	1043.0	983.8	848.8	741.7	696.3
166.5	1066.0	1010.0	880.0	774.1	729.4

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R-5030-00-UNVE10-35-LG.IES

CANDELA TABULATION - (Cont.)

167.0	1091.0	1033.0	906.4	807.1	762.6
167.5	1114.0	1058.0	937.4	840.4	796.6
168.0	1133.0	1083.0	965.6	873.3	830.7
168.5	1155.0	1105.0	994.7	906.1	862.6
169.0	1175.0	1129.0	1025.0	937.5	898.1
169.5	1195.0	1152.0	1053.0	972.1	931.9
170.0	1213.0	1176.0	1081.0	1004.0	967.0
170.5	1233.0	1196.0	1108.0	1037.0	1001.0
171.0	1250.0	1216.0	1135.0	1069.0	1036.0
171.5	1268.0	1235.0	1162.0	1100.0	1070.0
172.0	1284.0	1254.0	1186.0	1132.0	1102.0
172.5	1299.0	1273.0	1211.0	1161.0	1135.0
173.0	1312.0	1290.0	1235.0	1191.0	1165.0
173.5	1327.0	1307.0	1256.0	1219.0	1195.0
174.0	1340.0	1322.0	1278.0	1245.0	1223.0
174.5	1351.0	1335.0	1297.0	1270.0	1249.0
175.0	1361.0	1349.0	1315.0	1291.0	1274.0
175.5	1370.0	1361.0	1330.0	1314.0	1296.0
176.0	1380.0	1373.0	1346.0	1333.0	1320.0
176.5	1389.0	1381.0	1359.0	1349.0	1339.0
177.0	1398.0	1388.0	1370.0	1366.0	1355.0
177.5	1403.0	1397.0	1381.0	1378.0	1369.0
178.0	1408.0	1404.0	1388.0	1390.0	1383.0
178.5	1410.0	1408.0	1396.0	1397.0	1391.0
179.0	1415.0	1410.0	1400.0	1402.0	1395.0
179.5	1416.0	1412.0	1401.0	1407.0	1402.0
180.0	1408.0	1408.0	1408.0	1408.0	1408.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R-5030-00-UNVE10-35-LG.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	0.00	N.A.	0.00
0-30	0.00	N.A.	0.00
0-40	0.00	N.A.	0.00
0-60	0.01	N.A.	0.00
0-80	0.38	N.A.	0.10
0-90	0.86	N.A.	0.10
10-90	0.86	N.A.	0.10
20-40	0.00	N.A.	0.00
20-50	0.00	N.A.	0.00
40-70	0.14	N.A.	0.00
60-80	0.38	N.A.	0.10
70-80	0.24	N.A.	0.00
80-90	0.48	N.A.	0.10
90-110	6.99	N.A.	1.00
90-120	17.60	N.A.	2.60
90-130	38.53	N.A.	5.80
90-150	164.47	N.A.	24.70
90-180	665.61	N.A.	99.90
110-180	658.62	N.A.	98.80
0-180	666.47	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	0.00
10-20	0.00
20-30	0.00
30-40	0.00
40-50	0.00
50-60	0.01
60-70	0.14
70-80	0.24
80-90	0.48
90-100	1.80
100-110	5.19
110-120	10.61
120-130	20.93
130-140	41.33
140-150	84.61
150-160	162.01
160-170	220.79
170-180	118.34


IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R-5030-00-UNVE10-35-LG.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10	0
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	9	0
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7	0
3	72	63	56	51	61	54	49	44	37	34	31	21	20	18	7	6	6	0
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	0
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4	0
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4	0
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3	0
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	0
9	43	32	25	20	37	28	22	18	19	15	13	11	9	8	4	3	3	0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	0

POLAR GRAPH

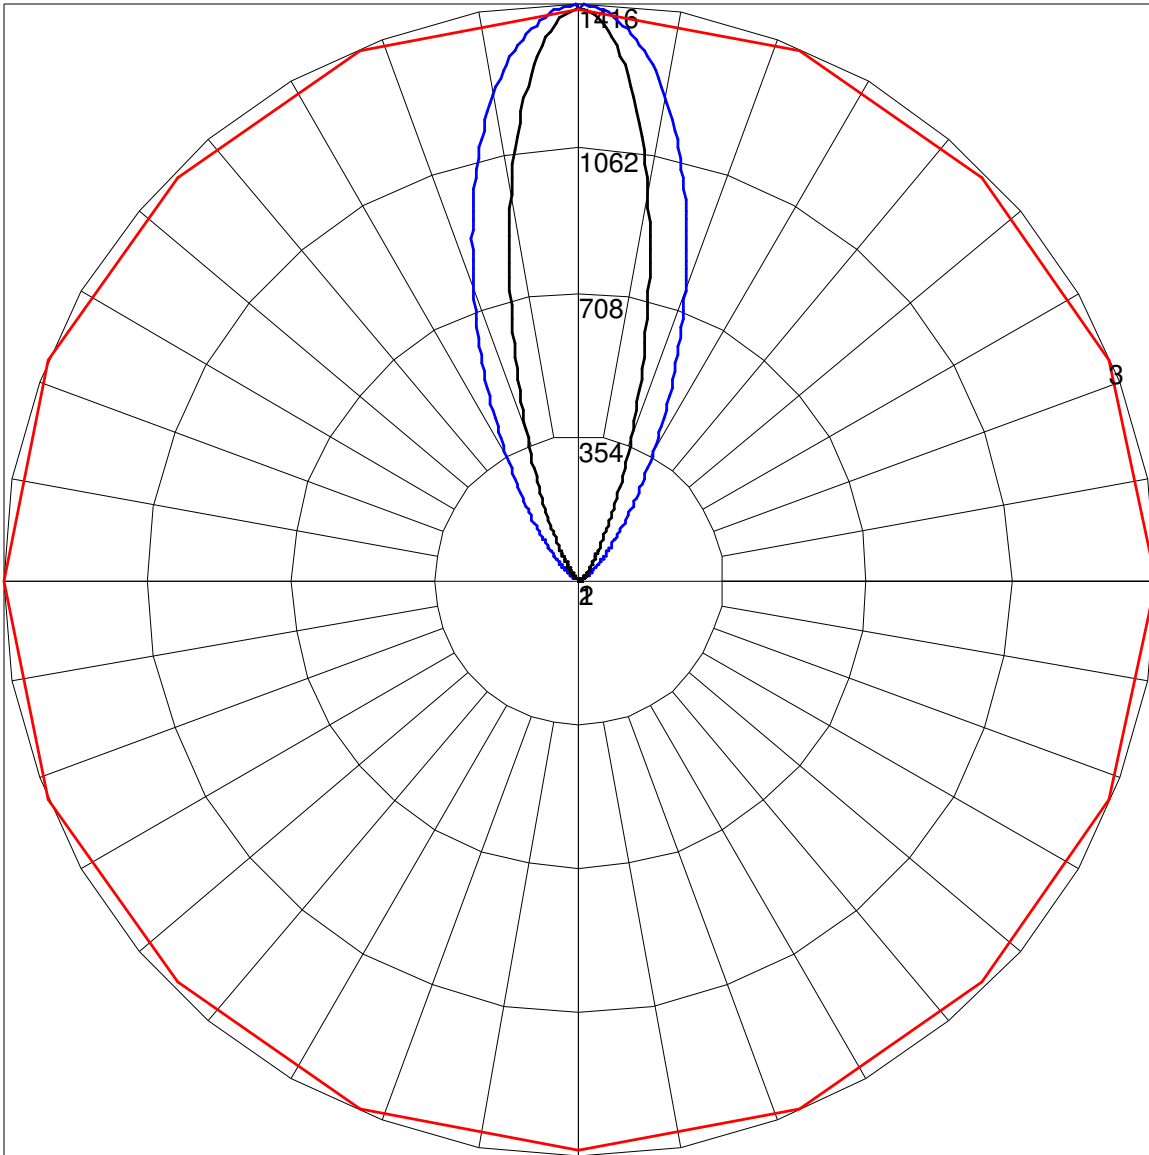

Maximum Candela = 1416 Located At Horizontal Angle = 0, Vertical Angle = 179.5
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Vertical Plane Through Horizontal Angles (90 - 270)
3 - Horizontal Cone Through Vertical Angle (179.5) (Through Max. Cd.)