

IES INDOOR REPORT PHOTOMETRIC FILENAME : C6R00-12-7612-UNVE5-D35S-LG.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] 11750395.05
[ECN] 3056
[TESTLAB] UL Verification Services Inc.
[ISSUEDATE] 5/5/2017
[MANUFAC] Tempo Industries Inc
[LUMCAT] C6R00-12-7612-UNVE5-D35S-LG
[LUMINAIRE] Gray metal mounting bracket with gray housing and diffuse
[MORE] plastic lens
[LAMP] 16 White LEDs
[BALLAST] Magtech M9-U12-0350
[OTHER] 24.9 C, 120.068 V, 0.039873 A, 4.7415 W, 0.990399 PF, 59.9983
[MORE] Hz
[OTHER] This test was performed using the calibrated photodetector met
[MORE] hod of absolute photometry.

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	421
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	89
Total Luminaire Watts	4.7415
Ballast Factor	1.00
CIE Type	Indirect
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.15 ft
Luminous Width (90-270)	1.00 ft
Luminous Height	0.07 ft



IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R00-12-7612-UNVE5-D35S-LG.IES

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	0	0	98
55	19	11	154
65	87	51	259
75	198	131	391
85	374	347	373

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R00-12-7612-UNVE5-D35S-LG.IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>
0.0	0.00	0.00	0.00	0.00	0.00
0.5	0.00	0.00	0.00	0.00	0.00
1.0	0.00	0.00	0.00	0.00	0.00
1.5	0.00	0.00	0.00	0.00	0.00
2.0	0.00	0.00	0.00	0.00	0.00
2.5	0.00	0.00	0.00	0.00	0.00
3.0	0.00	0.00	0.00	0.00	0.00
3.5	0.00	0.00	0.00	0.00	0.00
4.0	0.00	0.00	0.00	0.00	0.00
4.5	0.00	0.00	0.00	0.00	0.00
5.0	0.00	0.00	0.00	0.00	0.00
5.5	0.00	0.00	0.00	0.00	0.00
6.0	0.00	0.00	0.00	0.00	0.00
6.5	0.00	0.00	0.00	0.00	0.00
7.0	0.00	0.00	0.00	0.00	0.00
7.5	0.00	0.00	0.00	0.00	0.00
8.0	0.00	0.00	0.00	0.00	0.00
8.5	0.00	0.00	0.00	0.00	0.00
9.0	0.00	0.00	0.00	0.00	0.00
9.5	0.00	0.00	0.00	0.00	0.00
10.0	0.00	0.00	0.00	0.00	0.00
10.5	0.00	0.00	0.00	0.00	0.00
11.0	0.00	0.00	0.00	0.00	0.00
11.5	0.00	0.00	0.00	0.00	0.00
12.0	0.00	0.00	0.00	0.00	0.00
12.5	0.00	0.00	0.00	0.00	0.00
13.0	0.00	0.00	0.00	0.00	0.00
13.5	0.00	0.00	0.00	0.00	0.00
14.0	0.00	0.00	0.00	0.00	0.00
14.5	0.00	0.00	0.00	0.00	0.00
15.0	0.00	0.00	0.00	0.00	0.00
15.5	0.00	0.00	0.00	0.00	0.00
16.0	0.00	0.00	0.00	0.00	0.00
16.5	0.00	0.00	0.00	0.00	0.00
17.0	0.00	0.00	0.00	0.00	0.00
17.5	0.00	0.00	0.00	0.00	0.00
18.0	0.00	0.00	0.00	0.00	0.00
18.5	0.00	0.00	0.00	0.00	0.00
19.0	0.00	0.00	0.00	0.00	0.00
19.5	0.00	0.00	0.00	0.00	0.00
20.0	0.00	0.00	0.00	0.00	0.00
20.5	0.00	0.00	0.00	0.00	0.00
21.0	0.00	0.00	0.00	0.00	0.01
21.5	0.00	0.00	0.00	0.00	0.08
22.0	0.00	0.00	0.00	0.00	0.10
22.5	0.00	0.00	0.00	0.00	0.14
23.0	0.00	0.00	0.00	0.01	0.13
23.5	0.00	0.00	0.00	0.01	0.12
24.0	0.00	0.00	0.00	0.02	0.12
24.5	0.00	0.00	0.00	0.05	0.17
25.0	0.00	0.00	0.00	0.10	0.21
25.5	0.00	0.00	0.00	0.13	0.28
26.0	0.00	0.00	0.00	0.14	0.30
26.5	0.00	0.00	0.00	0.15	0.32

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R00-12-7612-UNVE5-D35S-LG.IES

CANDELA TABULATION - (Cont.)

27.0	0.00	0.00	0.00	0.15	0.34
27.5	0.00	0.00	0.00	0.16	0.34
28.0	0.00	0.00	0.00	0.18	0.36
28.5	0.00	0.00	0.00	0.21	0.40
29.0	0.00	0.00	0.00	0.22	0.43
29.5	0.00	0.00	0.00	0.25	0.45
30.0	0.00	0.00	0.00	0.24	0.47
30.5	0.00	0.00	0.00	0.26	0.48
31.0	0.00	0.00	0.00	0.25	0.47
31.5	0.00	0.00	0.00	0.29	0.52
32.0	0.00	0.00	0.00	0.34	0.58
32.5	0.00	0.00	0.00	0.37	0.63
33.0	0.00	0.00	0.00	0.40	0.67
33.5	0.00	0.00	0.00	0.41	0.70
34.0	0.00	0.00	0.00	0.41	0.69
34.5	0.00	0.00	0.00	0.43	0.72
35.0	0.00	0.00	0.00	0.44	0.72
35.5	0.00	0.00	0.00	0.47	0.72
36.0	0.00	0.00	0.00	0.47	0.75
36.5	0.00	0.00	0.00	0.49	0.78
37.0	0.00	0.00	0.00	0.46	0.83
37.5	0.00	0.00	0.00	0.49	0.80
38.0	0.00	0.00	0.00	0.51	0.86
38.5	0.00	0.00	0.00	0.53	0.84
39.0	0.00	0.00	0.00	0.53	0.87
39.5	0.00	0.00	0.00	0.54	0.87
40.0	0.00	0.00	0.00	0.56	0.90
40.5	0.00	0.00	0.00	0.57	0.91
41.0	0.00	0.00	0.00	0.59	0.92
41.5	0.00	0.00	0.00	0.59	0.94
42.0	0.00	0.00	0.00	0.61	0.96
42.5	0.00	0.00	0.00	0.61	0.96
43.0	0.00	0.00	0.00	0.62	0.98
43.5	0.00	0.00	0.00	0.64	0.99
44.0	0.00	0.00	0.00	0.64	1.00
44.5	0.00	0.00	0.00	0.64	1.01
45.0	0.00	0.00	0.00	0.64	1.01
45.5	0.00	0.00	0.00	0.65	1.01
46.0	0.00	0.00	0.00	0.65	1.02
46.5	0.00	0.00	0.00	0.65	1.03
47.0	0.00	0.00	0.00	0.65	1.04
47.5	0.00	0.00	0.00	0.65	1.05
48.0	0.00	0.00	0.00	0.65	1.05
48.5	0.00	0.00	0.00	0.65	1.07
49.0	0.00	0.00	0.00	0.65	1.09
49.5	0.00	0.00	0.00	0.64	1.10
50.0	0.00	0.00	0.00	0.64	1.12
50.5	0.00	0.00	0.01	0.64	1.13
51.0	0.00	0.00	0.02	0.63	1.15
51.5	0.02	0.03	0.02	0.63	1.17
52.0	0.05	0.05	0.04	0.63	1.19
52.5	0.10	0.08	0.05	0.62	1.21
53.0	0.13	0.10	0.07	0.62	1.22
53.5	0.16	0.13	0.08	0.60	1.24
54.0	0.20	0.17	0.10	0.60	1.27
54.5	0.23	0.20	0.12	0.59	1.30

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R00-12-7612-UNVE5-D35S-LG.IES

CANDELA TABULATION - (Cont.)

55.0	0.26	0.23	0.14	0.59	1.32
55.5	0.29	0.26	0.15	0.58	1.33
56.0	0.33	0.29	0.18	0.57	1.35
56.5	0.38	0.32	0.20	0.57	1.38
57.0	0.41	0.35	0.22	0.56	1.40
57.5	0.43	0.39	0.23	0.56	1.43
58.0	0.48	0.42	0.25	0.56	1.45
58.5	0.52	0.45	0.27	0.55	1.46
59.0	0.55	0.49	0.30	0.54	1.49
59.5	0.58	0.52	0.31	0.55	1.51
60.0	0.63	0.56	0.34	0.54	1.55
60.5	0.67	0.59	0.36	0.53	1.57
61.0	0.70	0.62	0.38	0.52	1.59
61.5	0.76	0.65	0.40	0.51	1.60
62.0	0.79	0.69	0.42	0.51	1.62
62.5	0.83	0.72	0.44	0.50	1.64
63.0	0.87	0.76	0.46	0.50	1.67
63.5	0.91	0.79	0.48	0.50	1.68
64.0	0.95	0.83	0.50	0.50	1.69
64.5	0.99	0.86	0.53	0.51	1.71
65.0	1.04	0.89	0.55	0.50	1.72
65.5	1.08	0.93	0.57	0.51	1.73
66.0	1.12	0.97	0.60	0.50	1.74
66.5	1.16	1.00	0.62	0.51	1.75
67.0	1.21	1.04	0.64	0.51	1.74
67.5	1.26	1.08	0.67	0.51	1.74
68.0	1.30	1.12	0.70	0.51	1.76
68.5	1.35	1.16	0.73	0.51	1.75
69.0	1.38	1.20	0.75	0.50	1.75
69.5	1.43	1.24	0.78	0.50	1.75
70.0	1.48	1.27	0.81	0.50	1.76
70.5	1.54	1.31	0.84	0.50	1.77
71.0	1.59	1.36	0.87	0.50	1.78
71.5	1.62	1.40	0.90	0.50	1.78
72.0	1.68	1.45	0.94	0.50	1.78
72.5	1.73	1.49	0.98	0.50	1.79
73.0	1.79	1.53	1.01	0.50	1.79
73.5	1.83	1.58	1.04	0.50	1.78
74.0	1.88	1.62	1.08	0.50	1.78
74.5	1.94	1.67	1.12	0.51	1.77
75.0	1.99	1.71	1.16	0.52	1.75
75.5	2.04	1.76	1.21	0.53	1.73
76.0	2.11	1.81	1.25	0.54	1.71
76.5	2.15	1.86	1.29	0.55	1.69
77.0	2.20	1.90	1.34	0.55	1.67
77.5	2.26	1.96	1.38	0.56	1.63
78.0	2.30	2.01	1.43	0.58	1.60
78.5	2.35	2.06	1.48	0.60	1.57
79.0	2.41	2.11	1.54	0.61	1.54
79.5	2.45	2.16	1.59	0.63	1.50
80.0	2.51	2.22	1.64	0.65	1.47
80.5	2.56	2.26	1.70	0.68	1.43
81.0	2.61	2.32	1.76	0.71	1.39
81.5	2.66	2.37	1.82	0.74	1.34
82.0	2.70	2.42	1.88	0.78	1.28
82.5	2.75	2.47	1.95	0.83	1.21

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R00-12-7612-UNVE5-D35S-LG.IES

CANDELA TABULATION - (Cont.)

83.0	2.80	2.52	2.01	0.87	1.16
83.5	2.84	2.58	2.09	0.93	1.08
84.0	2.88	2.63	2.16	1.00	0.99
84.5	2.93	2.69	2.23	1.07	0.91
85.0	2.97	2.74	2.31	1.14	0.81
85.5	3.00	2.79	2.39	1.23	0.71
86.0	3.04	2.85	2.48	1.32	0.63
86.5	3.07	2.90	2.56	1.42	0.53
87.0	3.12	2.96	2.64	1.54	0.45
87.5	3.16	3.01	2.73	1.66	0.38
88.0	3.19	3.07	2.83	1.78	0.31
88.5	3.22	3.12	2.93	1.93	0.28
89.0	3.26	3.16	3.03	2.08	0.24
89.5	3.28	3.23	3.13	2.24	0.22
90.0	3.31	3.28	3.23	2.43	0.26
90.5	3.35	3.33	3.34	2.62	0.35
91.0	3.37	3.39	3.46	2.83	0.52
91.5	3.39	3.44	3.58	3.05	0.81
92.0	3.42	3.49	3.70	3.29	1.17
92.5	3.45	3.56	3.81	3.54	1.61
93.0	3.47	3.61	3.95	3.79	2.12
93.5	3.50	3.67	4.08	4.08	2.69
94.0	3.53	3.73	4.23	4.36	3.29
94.5	3.56	3.78	4.36	4.67	3.96
95.0	3.58	3.84	4.50	4.99	4.67
95.5	3.61	3.91	4.66	5.33	5.43
96.0	3.64	3.97	4.81	5.70	6.22
96.5	3.68	4.04	4.96	6.07	7.06
97.0	3.71	4.12	5.13	6.46	7.90
97.5	3.75	4.19	5.31	6.86	8.80
98.0	3.79	4.26	5.49	7.28	9.71
98.5	3.84	4.34	5.67	7.71	10.61
99.0	3.88	4.42	5.86	8.17	11.53
99.5	3.93	4.50	6.06	8.67	12.49
100.0	3.99	4.59	6.26	9.14	13.50
100.5	4.05	4.69	6.47	9.65	14.49
101.0	4.11	4.79	6.69	10.18	15.54
101.5	4.19	4.89	6.92	10.73	16.52
102.0	4.25	5.00	7.16	11.27	17.55
102.5	4.34	5.11	7.41	11.81	18.63
103.0	4.43	5.24	7.65	12.44	19.68
103.5	4.51	5.38	7.93	13.01	20.75
104.0	4.62	5.51	8.21	13.63	21.83
104.5	4.73	5.65	8.48	14.26	22.90
105.0	4.84	5.82	8.80	14.88	23.98
105.5	4.97	5.98	9.10	15.55	25.03
106.0	5.11	6.15	9.42	16.17	26.22
106.5	5.24	6.32	9.74	16.86	27.28
107.0	5.39	6.51	10.09	17.54	28.36
107.5	5.56	6.73	10.42	18.22	29.51
108.0	5.73	6.93	10.81	18.92	30.58
108.5	5.92	7.16	11.18	19.64	31.63
109.0	6.10	7.40	11.57	20.37	32.74
109.5	6.32	7.63	11.97	21.11	33.79
110.0	6.51	7.89	12.39	21.85	34.88
110.5	6.73	8.15	12.82	22.63	35.95

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R00-12-7612-UNVE5-D35S-LG.IES

CANDELA TABULATION - (Cont.)

111.0	6.98	8.42	13.28	23.41	37.06
111.5	7.21	8.71	13.74	24.23	38.13
112.0	7.47	9.02	14.20	25.05	39.21
112.5	7.73	9.35	14.71	25.89	40.34
113.0	7.99	9.68	15.23	26.73	41.51
113.5	8.28	10.02	15.75	27.64	42.58
114.0	8.58	10.36	16.31	28.52	43.79
114.5	8.88	10.75	16.88	29.46	45.00
115.0	9.21	11.14	17.48	30.40	46.14
115.5	9.55	11.53	18.07	31.39	47.36
116.0	9.90	11.95	18.71	32.42	48.59
116.5	10.24	12.37	19.36	33.42	49.95
117.0	10.63	12.81	20.07	34.47	51.22
117.5	11.16	13.30	20.77	35.56	52.52
118.0	11.42	13.76	21.51	36.64	53.91
118.5	11.92	14.25	22.26	37.78	55.32
119.0	12.36	14.82	23.07	39.01	56.72
119.5	12.74	15.31	23.84	40.10	58.06
120.0	13.25	15.84	24.67	41.33	59.44
120.5	13.76	16.50	25.61	42.61	60.99
121.0	14.26	17.06	26.47	43.82	62.51
121.5	14.78	17.72	27.46	45.17	63.93
122.0	15.38	18.41	28.43	46.53	65.35
122.5	15.97	19.10	29.40	47.88	66.95
123.0	16.57	19.79	30.48	49.27	68.51
123.5	17.25	20.55	31.57	50.69	70.08
124.0	17.89	21.37	32.73	52.17	71.63
124.5	18.60	22.16	33.90	53.70	73.11
125.0	19.38	23.05	35.13	55.24	74.73
125.5	20.15	23.93	36.40	56.78	76.42
126.0	20.94	24.84	37.76	58.57	77.94
126.5	21.87	25.84	39.12	60.26	79.64
127.0	22.73	26.85	40.53	62.02	81.14
127.5	23.67	27.94	42.02	63.74	82.99
128.0	24.66	29.08	43.62	65.68	84.68
128.5	25.71	30.25	45.24	67.60	86.47
129.0	26.78	31.50	46.90	69.52	88.31
129.5	27.89	32.78	48.59	71.60	90.01
130.0	29.13	34.14	50.45	73.73	91.96
130.5	30.38	35.61	52.31	75.96	93.72
131.0	31.71	37.08	54.28	78.22	95.77
131.5	33.10	38.69	56.23	80.53	97.71
132.0	34.56	40.28	58.39	82.90	100.00
132.5	36.12	41.97	60.50	85.43	102.10
133.0	37.71	43.80	62.77	87.85	104.40
133.5	39.41	45.66	65.17	90.38	106.80
134.0	41.19	47.65	67.61	93.00	109.20
134.5	43.09	49.73	70.01	95.59	111.70
135.0	44.97	51.84	72.58	98.37	113.80
135.5	47.09	54.06	75.21	101.10	116.60
136.0	49.27	56.40	77.98	103.80	119.50
136.5	51.41	58.73	80.80	107.00	122.10
137.0	53.70	61.20	83.69	109.90	124.70
137.5	56.20	63.79	86.50	113.10	127.30
138.0	58.70	66.49	89.60	116.20	130.50
138.5	61.31	69.29	92.67	119.40	133.40

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R00-12-7612-UNVE5-D35S-LG.IES

CANDELA TABULATION - (Cont.)

139.0	64.05	72.13	95.85	122.50	136.40
139.5	66.76	75.08	98.99	125.90	139.60
140.0	69.71	78.06	102.20	129.10	142.30
140.5	72.70	81.34	105.50	132.40	145.40
141.0	75.81	84.40	108.90	135.80	148.40
141.5	78.99	87.56	112.30	139.00	151.20
142.0	82.28	91.01	115.90	142.50	154.40
142.5	85.50	94.41	119.50	145.90	157.90
143.0	89.07	97.91	123.30	149.50	161.00
143.5	92.71	101.70	127.00	152.80	164.20
144.0	96.36	105.40	130.80	156.30	167.10
144.5	99.95	109.10	134.50	159.80	170.20
145.0	103.50	113.00	138.30	163.20	173.00
145.5	107.40	117.00	142.00	166.80	176.50
146.0	111.70	121.10	146.00	170.20	179.60
146.5	115.70	125.30	149.80	173.60	182.50
147.0	120.20	129.40	153.70	177.00	185.50
147.5	124.10	133.60	157.60	180.60	188.60
148.0	128.40	137.70	161.60	183.90	191.40
148.5	132.80	142.30	165.30	187.20	194.50
149.0	137.20	146.40	169.50	190.60	197.10
149.5	142.00	150.80	173.20	193.70	200.30
150.0	146.10	155.20	176.90	197.20	202.70
150.5	151.00	159.40	180.90	200.30	205.60
151.0	155.60	163.70	184.80	203.40	208.30
151.5	160.00	168.10	188.50	206.40	210.70
152.0	164.60	172.40	192.00	209.50	213.40
152.5	169.00	176.50	195.60	212.10	215.90
153.0	173.30	180.90	199.40	215.10	218.40
153.5	178.10	184.90	203.00	217.90	221.10
154.0	182.40	189.40	206.20	220.80	223.20
154.5	186.90	193.30	209.70	223.20	225.60
155.0	191.20	197.20	213.10	225.70	228.10
155.5	195.50	201.20	216.20	228.30	230.10
156.0	199.50	205.10	219.60	230.80	232.10
156.5	203.70	208.80	222.60	232.90	234.10
157.0	207.90	212.80	225.60	235.60	236.40
157.5	211.60	216.20	228.30	237.80	238.30
158.0	215.70	219.80	231.20	239.80	240.00
158.5	219.70	223.20	234.10	242.00	241.60
159.0	223.10	226.50	236.80	243.90	243.60
159.5	226.80	230.10	239.10	245.80	245.30
160.0	229.90	232.90	241.90	248.00	247.20
160.5	233.50	236.10	244.00	249.40	248.40
161.0	237.10	238.80	246.40	251.10	250.30
161.5	240.00	242.00	248.70	253.10	251.60
162.0	242.80	244.70	250.90	254.30	252.90
162.5	246.10	247.20	253.10	256.10	254.40
163.0	248.90	249.40	255.00	257.60	255.70
163.5	251.60	252.20	256.50	259.00	256.60
164.0	253.40	254.10	258.20	259.90	258.30
164.5	256.30	256.40	259.90	261.40	258.80
165.0	258.70	258.30	261.30	262.60	260.00
165.5	260.70	260.10	262.80	263.60	261.30
166.0	263.00	262.10	264.20	264.80	262.30
166.5	264.60	263.90	265.50	265.70	263.10

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R00-12-7612-UNVE5-D35S-LG.IES

CANDELA TABULATION - (Cont.)

167.0	266.60	265.30	266.70	266.70	264.10
167.5	268.60	266.70	267.60	268.00	265.20
168.0	269.60	268.10	268.90	268.50	266.00
168.5	270.90	269.60	269.90	269.50	266.70
169.0	272.50	270.60	270.70	270.20	267.80
169.5	273.80	271.50	271.30	270.90	268.50
170.0	275.10	272.50	272.40	271.30	269.00
170.5	275.60	273.40	273.20	272.30	269.40
171.0	276.00	273.80	273.80	272.80	270.20
171.5	277.00	274.40	274.20	273.10	271.00
172.0	278.00	275.20	274.80	273.40	271.30
172.5	278.60	276.10	275.20	274.10	272.10
173.0	279.10	276.30	275.40	274.60	272.10
173.5	279.00	276.20	275.90	275.30	272.80
174.0	279.60	276.80	276.20	275.60	273.30
174.5	279.80	277.40	276.10	275.90	273.50
175.0	280.00	277.20	276.80	275.80	273.90
175.5	280.30	277.40	276.90	276.40	274.40
176.0	280.60	277.50	277.20	276.70	274.80
176.5	280.20	277.60	277.20	276.10	274.90
177.0	280.20	277.60	277.10	276.70	274.80
177.5	280.40	277.90	277.40	277.10	275.20
178.0	280.60	277.70	277.30	277.20	275.10
178.5	280.30	277.80	277.40	277.30	275.40
179.0	280.30	277.90	277.60	277.40	275.30
179.5	280.10	277.80	277.30	277.30	275.50
180.0	277.60	277.60	277.60	277.60	277.60

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R00-12-7612-UNVE5-D35S-LG.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	0.00	N.A.	0.00
0-30	0.03	N.A.	0.00
0-40	0.15	N.A.	0.00
0-60	0.77	N.A.	0.20
0-80	3.00	N.A.	0.70
0-90	5.25	N.A.	1.20
10-90	5.25	N.A.	1.20
20-40	0.15	N.A.	0.00
20-50	0.37	N.A.	0.10
40-70	1.45	N.A.	0.30
60-80	2.23	N.A.	0.50
70-80	1.40	N.A.	0.30
80-90	2.25	N.A.	0.50
90-110	16.71	N.A.	4.00
90-120	38.45	N.A.	9.10
90-130	74.82	N.A.	17.80
90-150	220.05	N.A.	52.30
90-180	415.67	N.A.	98.80
110-180	398.96	N.A.	94.80
0-180	420.93	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	0.00
10-20	0.00
20-30	0.03
30-40	0.12
40-50	0.22
50-60	0.40
60-70	0.83
70-80	1.40
80-90	2.25
90-100	4.96
100-110	11.74
110-120	21.75
120-130	36.37
130-140	58.96
140-150	86.27
150-160	96.41
160-170	72.94
170-180	26.27


IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6R00-12-7612-UNVE5-D35S-LG.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	
0	96	96	96	96	82	82	82	82	56	56	56	33	33	33	11	11	11	1
1	87	83	79	76	74	71	68	65	49	47	45	28	27	27	10	9	9	1
2	79	72	66	61	67	62	57	53	42	40	37	25	23	22	8	8	7	0
3	72	63	56	51	61	54	49	44	37	34	31	22	20	18	7	7	6	0
4	65	55	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	0
5	60	49	42	36	51	42	36	31	29	25	22	17	15	13	6	5	4	0
6	55	44	36	31	47	38	31	27	26	22	19	15	13	11	5	4	4	0
7	50	39	32	27	43	34	28	23	23	19	16	14	11	10	5	4	3	0
8	46	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	0
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3	0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	0

POLAR GRAPH

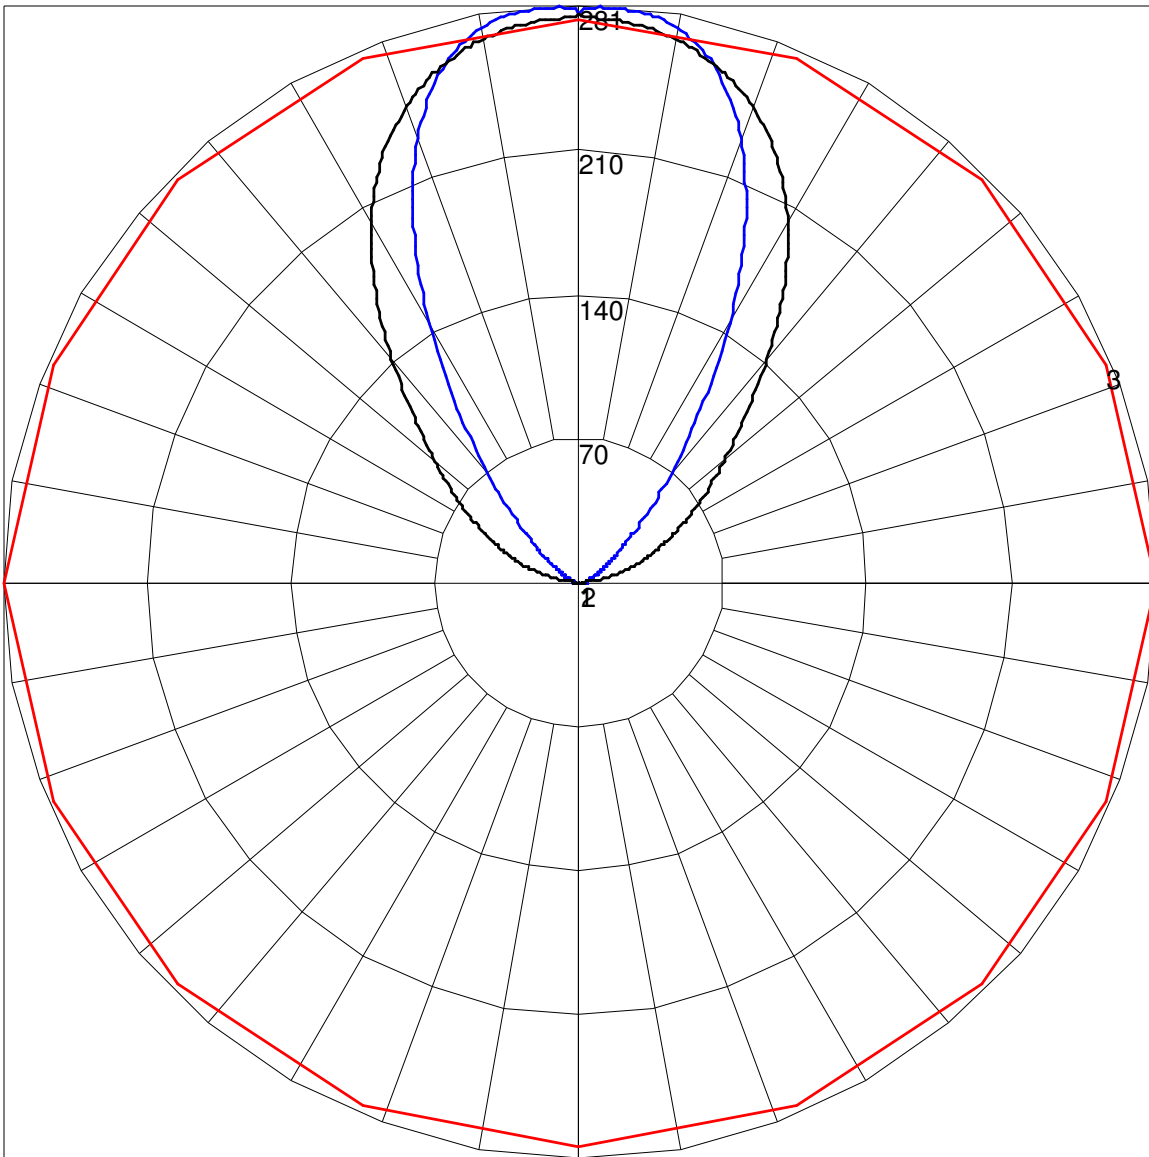

Maximum Candela = 280.6 Located At Horizontal Angle = 0, Vertical Angle = 176

1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

2 - Vertical Plane Through Horizontal Angles (90 - 270)

3 - Horizontal Cone Through Vertical Angle (176) (Through Max. Cd.)