

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6RX00-12-CL12-UNVE9-D35S-NA.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TEST] 11750395.17
 [ECN] 3081
 [TESTLAB] UL Verification Services Inc.
 [ISSUE DATE] 5/11/2017
 [MANUFAC] Tempo Industries Inc
 [LUMCAT] C6RX00-12-CL12-UNVE9-D35S-NA
 [LUMINAIRE] Rectangular brown metal housing and clear glass lens
 [LAMP] 21 White LEDs
 [BALLAST] Magtech M9-U24-0350
 [OTHER] 24.7 C, 120.051 V, 0.0700793 A, 8.36007 W, 0.993702 PF, 59.998
 [MORE] 4 Hz
 [OTHER] This test was performed using the calibrated photodetector met
 [MORE] hod of absolute photometry.

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	798
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	95
Total Luminaire Watts	8.36007
Ballast Factor	1.00
CIE Type	Indirect
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.13 ft
Luminous Width (90-270)	0.96 ft
Luminous Height	0.00 ft



LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	0	0	0
55	0	0	0
65	0	0	0
75	0	0	0
85	0	0	0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6RX00-12-CL12-UNVE9-D35S-NA.IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>
0.0	0.00	0.00	0.00	0.00	0.00
0.5	0.00	0.00	0.00	0.00	0.00
1.0	0.00	0.00	0.00	0.00	0.00
1.5	0.00	0.00	0.00	0.00	0.00
2.0	0.00	0.00	0.00	0.00	0.00
2.5	0.00	0.00	0.00	0.00	0.00
3.0	0.00	0.00	0.00	0.00	0.00
3.5	0.00	0.00	0.00	0.00	0.00
4.0	0.00	0.00	0.00	0.00	0.00
4.5	0.00	0.00	0.00	0.00	0.00
5.0	0.00	0.00	0.00	0.00	0.00
5.5	0.00	0.00	0.00	0.00	0.00
6.0	0.00	0.00	0.00	0.00	0.00
6.5	0.00	0.00	0.00	0.00	0.00
7.0	0.00	0.00	0.00	0.00	0.00
7.5	0.00	0.00	0.00	0.00	0.00
8.0	0.00	0.00	0.00	0.00	0.00
8.5	0.00	0.00	0.00	0.00	0.00
9.0	0.00	0.00	0.00	0.00	0.00
9.5	0.00	0.00	0.00	0.00	0.00
10.0	0.00	0.00	0.00	0.00	0.00
10.5	0.00	0.00	0.00	0.00	0.00
11.0	0.00	0.00	0.00	0.00	0.00
11.5	0.00	0.00	0.00	0.00	0.00
12.0	0.00	0.00	0.00	0.00	0.00
12.5	0.00	0.00	0.00	0.00	0.00
13.0	0.00	0.00	0.00	0.00	0.00
13.5	0.00	0.00	0.00	0.00	0.00
14.0	0.00	0.00	0.00	0.00	0.00
14.5	0.00	0.00	0.00	0.00	0.00
15.0	0.00	0.00	0.00	0.00	0.00
15.5	0.00	0.00	0.00	0.00	0.00
16.0	0.00	0.00	0.00	0.00	0.00
16.5	0.00	0.00	0.00	0.00	0.00
17.0	0.00	0.00	0.00	0.00	0.00
17.5	0.00	0.00	0.00	0.00	0.00
18.0	0.00	0.00	0.00	0.00	0.00
18.5	0.00	0.00	0.00	0.00	0.00
19.0	0.00	0.00	0.00	0.00	0.00
19.5	0.00	0.00	0.00	0.00	0.00
20.0	0.00	0.00	0.00	0.00	0.00
20.5	0.00	0.00	0.00	0.00	0.00
21.0	0.00	0.00	0.00	0.00	0.00
21.5	0.00	0.00	0.00	0.00	0.00
22.0	0.00	0.00	0.00	0.00	0.00
22.5	0.00	0.00	0.00	0.00	0.00
23.0	0.00	0.00	0.00	0.00	0.00
23.5	0.00	0.00	0.00	0.00	0.00
24.0	0.00	0.00	0.00	0.00	0.00
24.5	0.00	0.00	0.00	0.00	0.00
25.0	0.00	0.00	0.00	0.00	0.00
25.5	0.00	0.00	0.00	0.00	0.00
26.0	0.00	0.00	0.00	0.00	0.00
26.5	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6RX00-12-CL12-UNVE9-D35S-NA.IES

CANDELA TABULATION - (Cont.)

27.0	0.00	0.00	0.00	0.00	0.00
27.5	0.00	0.00	0.00	0.00	0.00
28.0	0.00	0.00	0.00	0.00	0.00
28.5	0.00	0.00	0.00	0.00	0.00
29.0	0.00	0.00	0.00	0.00	0.00
29.5	0.00	0.00	0.00	0.00	0.00
30.0	0.00	0.00	0.00	0.00	0.00
30.5	0.00	0.00	0.00	0.00	0.00
31.0	0.00	0.00	0.00	0.00	0.00
31.5	0.00	0.00	0.00	0.00	0.00
32.0	0.00	0.00	0.00	0.00	0.00
32.5	0.00	0.00	0.00	0.00	0.00
33.0	0.00	0.00	0.00	0.00	0.00
33.5	0.00	0.00	0.00	0.00	0.00
34.0	0.00	0.00	0.00	0.00	0.00
34.5	0.00	0.00	0.00	0.00	0.00
35.0	0.00	0.00	0.00	0.00	0.00
35.5	0.00	0.00	0.00	0.00	0.00
36.0	0.00	0.00	0.00	0.00	0.00
36.5	0.00	0.00	0.00	0.00	0.00
37.0	0.00	0.00	0.00	0.00	0.00
37.5	0.00	0.00	0.00	0.00	0.00
38.0	0.00	0.00	0.00	0.00	0.00
38.5	0.00	0.00	0.00	0.00	0.00
39.0	0.00	0.00	0.00	0.00	0.00
39.5	0.00	0.00	0.00	0.00	0.00
40.0	0.00	0.00	0.00	0.00	0.00
40.5	0.00	0.00	0.00	0.00	0.00
41.0	0.00	0.00	0.00	0.00	0.00
41.5	0.00	0.00	0.00	0.00	0.00
42.0	0.00	0.00	0.00	0.00	0.00
42.5	0.00	0.00	0.00	0.00	0.00
43.0	0.00	0.00	0.00	0.00	0.00
43.5	0.00	0.00	0.00	0.00	0.00
44.0	0.00	0.00	0.00	0.00	0.00
44.5	0.00	0.00	0.00	0.00	0.00
45.0	0.00	0.00	0.00	0.00	0.00
45.5	0.00	0.00	0.00	0.00	0.00
46.0	0.00	0.00	0.00	0.00	0.00
46.5	0.00	0.00	0.00	0.00	0.00
47.0	0.00	0.00	0.00	0.00	0.00
47.5	0.00	0.00	0.00	0.00	0.00
48.0	0.00	0.00	0.00	0.00	0.00
48.5	0.00	0.00	0.00	0.00	0.00
49.0	0.00	0.00	0.00	0.00	0.00
49.5	0.00	0.00	0.00	0.00	0.00
50.0	0.00	0.00	0.00	0.00	0.00
50.5	0.00	0.00	0.00	0.00	0.00
51.0	0.00	0.00	0.00	0.00	0.00
51.5	0.00	0.00	0.00	0.00	0.00
52.0	0.00	0.00	0.00	0.00	0.00
52.5	0.00	0.00	0.00	0.00	0.00
53.0	0.00	0.00	0.00	0.00	0.00
53.5	0.00	0.00	0.00	0.00	0.00
54.0	0.00	0.00	0.00	0.00	0.00
54.5	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6RX00-12-CL12-UNVE9-D35S-NA.IES

CANDELA TABULATION - (Cont.)

55.0	0.00	0.00	0.00	0.00	0.00
55.5	0.00	0.00	0.00	0.00	0.00
56.0	0.00	0.00	0.00	0.00	0.00
56.5	0.00	0.00	0.00	0.00	0.00
57.0	0.00	0.00	0.00	0.00	0.00
57.5	0.00	0.00	0.00	0.00	0.00
58.0	0.00	0.00	0.00	0.00	0.00
58.5	0.00	0.00	0.00	0.00	0.00
59.0	0.00	0.00	0.00	0.00	0.00
59.5	0.00	0.00	0.00	0.00	0.00
60.0	0.00	0.00	0.00	0.00	0.00
60.5	0.00	0.00	0.00	0.00	0.00
61.0	0.00	0.00	0.00	0.00	0.00
61.5	0.00	0.00	0.00	0.00	0.00
62.0	0.00	0.00	0.00	0.00	0.00
62.5	0.00	0.00	0.00	0.00	0.00
63.0	0.00	0.00	0.00	0.00	0.00
63.5	0.00	0.00	0.00	0.00	0.00
64.0	0.00	0.00	0.00	0.00	0.00
64.5	0.00	0.00	0.00	0.00	0.00
65.0	0.00	0.00	0.00	0.00	0.00
65.5	0.00	0.00	0.00	0.00	0.00
66.0	0.00	0.00	0.00	0.00	0.00
66.5	0.00	0.00	0.00	0.00	0.00
67.0	0.00	0.00	0.00	0.00	0.00
67.5	0.00	0.00	0.00	0.00	0.00
68.0	0.00	0.00	0.00	0.00	0.00
68.5	0.00	0.00	0.00	0.00	0.00
69.0	0.00	0.00	0.00	0.00	0.00
69.5	0.00	0.00	0.00	0.00	0.00
70.0	0.00	0.00	0.00	0.00	0.00
70.5	0.00	0.00	0.00	0.00	0.00
71.0	0.00	0.00	0.00	0.00	0.00
71.5	0.00	0.00	0.00	0.00	0.00
72.0	0.00	0.00	0.00	0.00	0.00
72.5	0.00	0.00	0.00	0.00	0.00
73.0	0.00	0.00	0.00	0.00	0.00
73.5	0.00	0.00	0.00	0.00	0.00
74.0	0.00	0.00	0.00	0.00	0.00
74.5	0.00	0.00	0.00	0.00	0.00
75.0	0.00	0.00	0.00	0.00	0.00
75.5	0.00	0.00	0.00	0.00	0.00
76.0	0.00	0.00	0.00	0.00	0.00
76.5	0.00	0.00	0.00	0.00	0.00
77.0	0.00	0.00	0.00	0.00	0.00
77.5	0.00	0.00	0.00	0.00	0.00
78.0	0.00	0.00	0.00	0.00	0.00
78.5	0.00	0.00	0.00	0.00	0.00
79.0	0.00	0.00	0.00	0.00	0.00
79.5	0.00	0.00	0.00	0.00	0.00
80.0	0.00	0.00	0.00	0.00	0.00
80.5	0.00	0.00	0.00	0.00	0.00
81.0	0.00	0.00	0.00	0.00	0.00
81.5	0.00	0.00	0.00	0.00	0.00
82.0	0.00	0.00	0.00	0.00	0.00
82.5	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6RX00-12-CL12-UNVE9-D35S-NA.IES

CANDELA TABULATION - (Cont.)

83.0	0.00	0.00	0.00	0.00	0.00
83.5	0.00	0.00	0.00	0.00	0.00
84.0	0.00	0.00	0.00	0.00	0.00
84.5	0.00	0.00	0.00	0.00	0.00
85.0	0.00	0.00	0.00	0.00	0.00
85.5	0.00	0.00	0.00	0.00	0.00
86.0	0.00	0.00	0.00	0.00	0.00
86.5	0.00	0.00	0.00	0.00	0.00
87.0	0.00	0.00	0.00	0.00	0.00
87.5	0.00	0.00	0.00	0.00	0.00
88.0	0.00	0.00	0.00	0.00	0.00
88.5	0.00	0.00	0.00	0.00	0.00
89.0	0.00	0.00	0.00	0.00	0.00
89.5	0.00	0.00	0.00	0.00	0.00
90.0	0.00	0.00	0.00	0.00	0.00
90.5	0.04	0.06	0.07	0.18	0.24
91.0	0.05	0.07	0.10	0.26	0.29
91.5	0.09	0.12	0.19	0.36	0.36
92.0	0.12	0.20	0.29	0.49	0.46
92.5	0.21	0.31	0.41	0.63	0.59
93.0	0.30	0.44	0.57	0.78	0.75
93.5	0.49	0.57	0.77	0.95	0.99
94.0	0.76	0.76	0.97	1.12	1.35
94.5	1.00	0.96	1.18	1.26	1.82
95.0	1.13	1.16	1.38	1.40	2.47
95.5	1.27	1.38	1.58	1.56	3.23
96.0	1.48	1.60	1.77	1.72	4.11
96.5	1.74	1.82	1.93	1.90	5.12
97.0	1.99	2.03	2.08	2.06	6.29
97.5	2.23	2.24	2.23	2.23	7.64
98.0	2.46	2.41	2.37	2.39	9.00
98.5	2.65	2.58	2.52	2.56	10.68
99.0	2.78	2.73	2.66	2.72	12.37
99.5	2.92	2.86	2.82	2.86	14.27
100.0	3.03	3.00	2.98	3.02	16.19
100.5	3.17	3.12	3.14	3.19	18.41
101.0	3.30	3.27	3.31	3.35	20.50
101.5	3.43	3.41	3.47	3.53	22.77
102.0	3.56	3.56	3.63	3.70	25.28
102.5	3.71	3.70	3.78	3.89	27.84
103.0	3.85	3.84	3.92	4.10	30.20
103.5	3.98	4.00	4.06	4.60	32.97
104.0	4.13	4.15	4.19	6.48	36.27
104.5	4.27	4.30	4.32	11.60	39.09
105.0	4.42	4.44	4.44	19.52	41.42
105.5	4.56	4.58	4.55	27.72	44.10
106.0	4.70	4.71	4.66	34.24	47.63
106.5	4.84	4.85	4.76	38.99	50.61
107.0	4.97	4.97	4.85	43.41	53.89
107.5	5.10	5.09	4.96	49.24	57.19
108.0	5.21	5.20	5.06	56.03	60.33
108.5	5.32	5.29	5.16	61.34	63.54
109.0	5.43	5.38	5.30	65.43	66.85
109.5	5.53	5.47	5.43	68.90	69.93
110.0	5.61	5.56	5.58	72.57	72.95
110.5	5.70	5.63	5.74	77.21	76.11

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6RX00-12-CL12-UNVE9-D35S-NA.IES

CANDELA TABULATION - (Cont.)

111.0	5.78	5.70	5.90	80.96	79.82
111.5	5.85	5.78	6.07	84.06	83.83
112.0	5.91	5.84	6.27	87.07	87.76
112.5	6.00	5.90	6.46	89.93	91.56
113.0	6.04	5.99	6.67	93.11	94.63
113.5	6.00	6.06	6.88	96.27	97.35
114.0	6.17	6.15	7.11	99.33	100.30
114.5	6.22	6.26	7.38	102.40	103.50
115.0	6.26	6.37	8.31	105.30	106.50
115.5	6.35	6.52	10.64	108.20	109.40
116.0	6.40	6.66	15.21	111.20	112.70
116.5	6.47	6.82	24.61	114.60	116.00
117.0	6.61	6.97	37.69	117.80	119.20
117.5	6.77	7.19	53.06	121.10	122.40
118.0	6.91	7.36	69.54	124.80	125.60
118.5	7.09	7.55	84.17	129.10	128.50
119.0	7.28	7.80	95.75	133.60	131.30
119.5	7.42	7.93	105.10	138.20	134.20
120.0	7.60	8.17	114.80	142.10	137.50
120.5	7.84	8.43	125.80	145.40	141.50
121.0	8.02	8.64	136.20	148.50	146.50
121.5	8.21	9.06	144.80	151.50	151.30
122.0	8.45	10.79	150.70	154.70	155.00
122.5	8.68	14.25	155.00	157.60	158.30
123.0	8.91	20.45	158.30	160.40	161.30
123.5	9.18	32.61	161.30	163.40	164.00
124.0	9.43	48.69	164.40	166.30	167.10
124.5	9.70	66.84	167.20	168.90	169.70
125.0	10.68	85.51	170.00	171.90	172.50
125.5	15.57	103.20	172.80	174.60	175.50
126.0	24.14	119.80	175.60	177.60	178.40
126.5	39.19	134.20	178.50	180.30	181.50
127.0	64.11	147.10	181.30	183.20	184.10
127.5	93.29	161.00	184.20	185.90	186.70
128.0	121.80	173.90	187.00	188.80	189.20
128.5	148.00	185.30	190.00	191.50	191.60
129.0	168.70	193.50	193.10	194.20	193.70
129.5	183.30	199.30	196.60	196.70	196.10
130.0	194.00	204.00	200.10	199.30	198.20
130.5	201.80	207.30	203.60	201.60	200.20
131.0	207.60	210.30	207.20	204.00	202.20
131.5	211.70	213.00	210.50	206.40	204.50
132.0	215.00	215.70	213.80	208.80	207.10
132.5	217.80	218.40	216.90	211.20	209.20
133.0	220.60	220.70	220.10	213.50	211.70
133.5	223.30	223.30	222.90	215.80	213.90
134.0	226.00	225.90	225.80	218.10	216.50
134.5	228.60	228.20	228.10	220.60	218.50
135.0	231.00	230.70	230.50	223.10	220.80
135.5	233.50	233.20	233.10	225.30	223.40
136.0	235.90	235.50	235.60	227.50	225.80
136.5	238.20	237.70	237.90	230.40	228.00
137.0	240.60	239.80	240.10	233.10	230.30
137.5	243.00	242.20	242.50	236.00	232.40
138.0	245.60	244.50	244.80	239.20	234.70
138.5	247.80	246.60	246.80	242.60	237.10

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6RX00-12-CL12-UNVE9-D35S-NA.IES

CANDELA TABULATION - (Cont.)

139.0	250.10	248.90	249.20	246.40	239.70
139.5	252.10	251.00	251.50	250.00	242.40
140.0	254.30	253.20	253.90	253.40	245.40
140.5	256.40	255.20	255.90	256.10	248.60
141.0	259.00	257.20	258.20	258.90	251.80
141.5	260.80	259.50	260.10	261.30	255.70
142.0	262.90	261.50	262.10	263.50	259.20
142.5	264.70	263.60	264.10	265.40	262.20
143.0	266.90	265.60	266.10	267.20	265.10
143.5	268.60	267.40	267.90	269.20	267.30
144.0	270.40	269.20	269.80	270.80	269.50
144.5	272.20	271.00	271.60	272.70	271.40
145.0	274.20	272.80	273.80	274.40	273.30
145.5	276.10	274.50	275.70	276.30	275.20
146.0	278.00	276.40	277.40	278.00	276.70
146.5	279.60	278.00	279.40	279.80	278.30
147.0	281.30	279.50	280.90	281.40	279.80
147.5	283.20	281.60	282.60	282.90	281.50
148.0	284.90	283.30	284.40	284.70	283.20
148.5	286.70	284.80	286.10	286.20	284.50
149.0	288.60	286.50	287.80	287.90	285.90
149.5	290.00	288.00	289.50	289.30	287.40
150.0	291.60	289.70	290.90	291.00	288.90
150.5	293.20	291.60	292.40	292.60	289.80
151.0	294.70	293.20	294.00	293.90	291.30
151.5	295.90	294.80	295.30	295.50	292.80
152.0	297.50	296.30	296.80	296.90	294.10
152.5	299.30	297.80	298.10	298.40	295.40
153.0	300.80	299.00	299.60	299.90	296.60
153.5	302.20	300.40	300.90	301.40	298.00
154.0	303.90	302.00	302.30	302.70	299.60
154.5	305.20	303.50	303.50	304.00	301.10
155.0	306.60	304.80	304.90	305.30	302.30
155.5	308.10	306.00	306.00	306.40	303.40
156.0	309.30	307.30	307.10	307.50	304.40
156.5	310.40	308.40	308.30	309.00	305.70
157.0	311.70	309.50	309.40	310.10	306.90
157.5	312.70	310.90	310.60	311.30	308.40
158.0	314.10	312.00	311.70	312.40	309.70
158.5	315.30	313.30	312.80	313.50	310.70
159.0	316.40	314.40	314.10	314.90	311.70
159.5	317.70	315.50	315.00	315.60	312.80
160.0	318.50	316.50	316.10	316.50	313.60
160.5	319.50	317.50	317.10	317.50	315.20
161.0	320.00	318.50	318.10	318.40	316.00
161.5	321.10	319.20	319.20	319.40	316.90
162.0	321.80	320.10	320.00	320.10	318.20
162.5	322.30	321.20	321.10	320.80	318.80
163.0	322.90	322.20	322.10	321.90	320.00
163.5	323.70	322.70	322.90	322.80	320.50
164.0	324.40	323.60	324.00	323.60	321.20
164.5	324.90	324.40	324.30	324.50	322.50
165.0	325.90	325.20	325.10	325.00	323.20
165.5	326.20	326.00	326.00	325.60	324.20
166.0	327.20	326.60	326.70	326.30	325.00
166.5	327.60	327.10	327.20	327.00	325.90

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6RX00-12-CL12-UNVE9-D35S-NA.IES

CANDELA TABULATION - (Cont.)

167.0	328.20	327.80	327.90	327.90	326.30
167.5	328.60	328.30	328.50	328.40	326.90
168.0	329.10	328.90	329.20	329.10	327.80
168.5	329.60	329.60	329.70	329.80	328.70
169.0	330.50	330.30	330.20	330.50	329.20
169.5	330.80	330.80	330.70	331.20	329.40
170.0	331.40	331.70	331.00	331.70	330.30
170.5	331.60	332.00	331.60	332.20	331.00
171.0	332.10	332.40	331.90	332.60	331.00
171.5	332.40	332.60	332.50	333.30	331.40
172.0	332.50	333.00	332.70	333.60	331.70
172.5	333.00	333.70	333.10	333.90	331.70
173.0	333.10	334.00	333.30	334.30	331.90
173.5	333.60	334.20	333.70	334.50	332.30
174.0	333.70	334.40	333.80	334.60	332.20
174.5	334.10	334.80	333.80	334.90	332.20
175.0	334.20	335.00	334.30	335.00	332.30
175.5	334.50	335.40	334.40	335.10	332.20
176.0	334.70	335.60	334.70	335.30	332.30
176.5	335.20	335.70	334.80	335.30	332.60
177.0	335.00	335.60	334.70	335.40	332.60
177.5	335.00	335.70	335.00	335.50	332.50
178.0	335.00	335.80	335.10	335.50	332.70
178.5	335.30	336.20	335.40	335.80	332.70
179.0	335.40	335.80	335.30	335.80	333.00
179.5	335.20	335.90	335.10	335.90	332.90
180.0	335.30	335.30	335.30	335.30	335.30

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6RX00-12-CL12-UNVE9-D35S-NA.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	0.00	N.A.	0.00
0-30	0.00	N.A.	0.00
0-40	0.00	N.A.	0.00
0-60	0.00	N.A.	0.00
0-80	0.00	N.A.	0.00
0-90	0.00	N.A.	0.00
10-90	0.00	N.A.	0.00
20-40	0.00	N.A.	0.00
20-50	0.00	N.A.	0.00
40-70	0.00	N.A.	0.00
60-80	0.00	N.A.	0.00
70-80	0.00	N.A.	0.00
80-90	0.00	N.A.	0.00
90-110	17.55	N.A.	2.20
90-120	66.86	N.A.	8.40
90-130	187.42	N.A.	23.50
90-150	533.84	N.A.	66.90
90-180	797.91	N.A.	100.00
110-180	780.36	N.A.	97.80
0-180	797.91	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	0.00
10-20	0.00
20-30	0.00
30-40	0.00
40-50	0.00
50-60	0.00
60-70	0.00
70-80	0.00
80-90	0.00
90-100	1.90
100-110	15.65
110-120	49.31
120-130	120.56
130-140	175.39
140-150	171.03
150-160	140.47
160-170	91.78
170-180	31.83


IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6RX00-12-CL12-UNVE9-D35S-NA.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10	0
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8	0
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7	0
3	72	63	56	51	61	54	49	44	37	34	31	21	20	18	7	6	6	0
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	0
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4	0
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4	0
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3	0
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	0
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3	0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	0

POLAR GRAPH

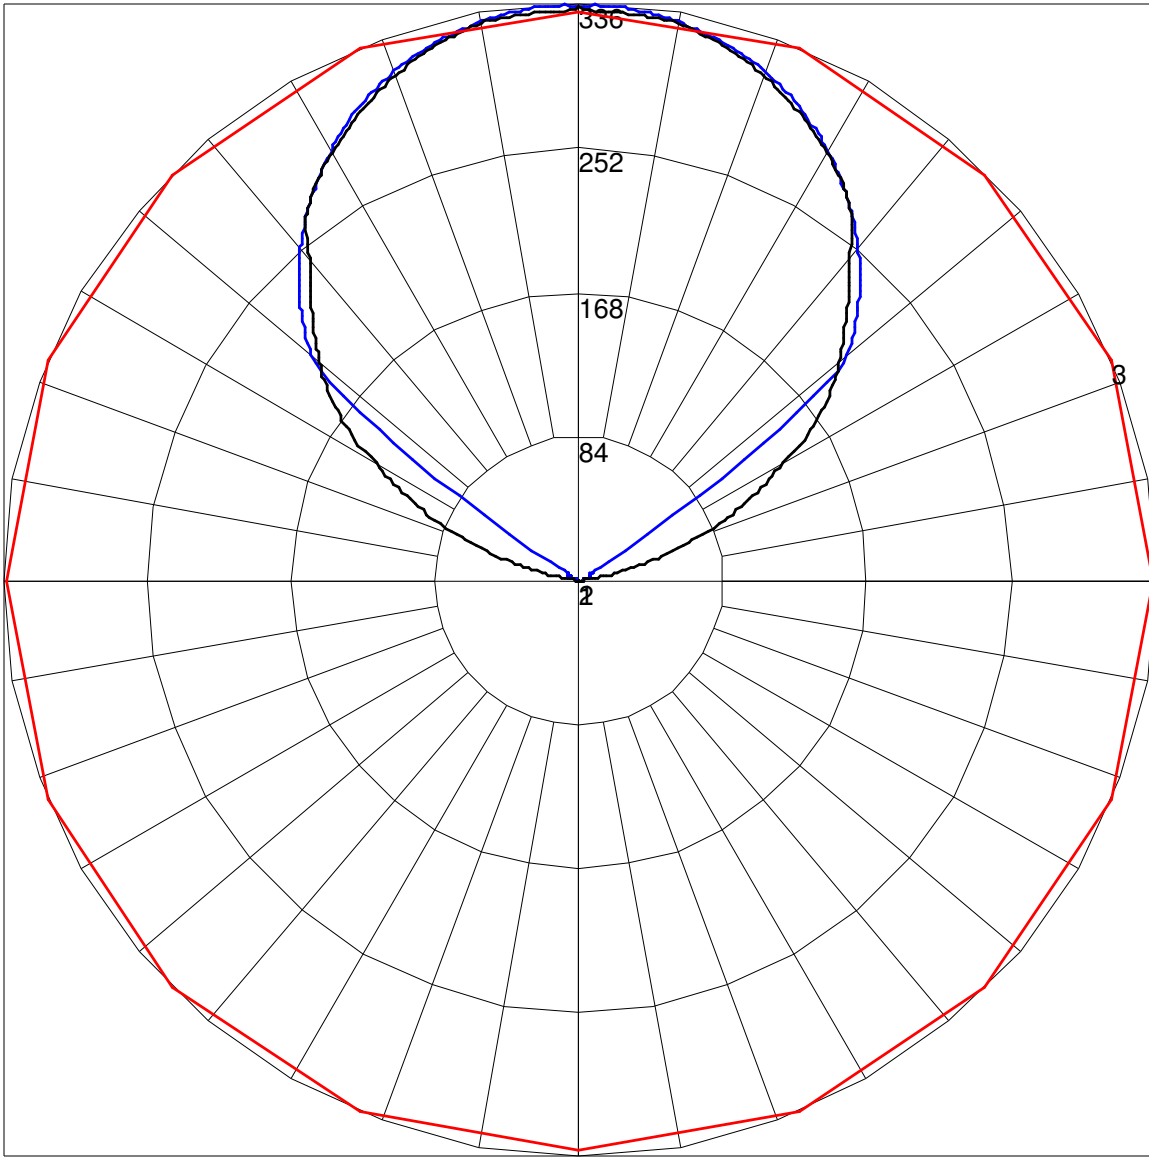

Maximum Candela = 336.2 Located At Horizontal Angle = 22.5, Vertical Angle = 178.5
1 - Vertical Plane Through Horizontal Angles (22.5 - 202.5) (Through Max. Cd.)
2 - Vertical Plane Through Horizontal Angles (90 - 270)
3 - Horizontal Cone Through Vertical Angle (178.5) (Through Max. Cd.)