



1961 McGaw Ave, Irvine, CA 92614
 phone: 949.442.1601
 email: info@tempolc.com

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-1012-UNVE5-D35S-LG.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TEST] 11750395.08
 [ECN] 3074
 [TESTLAB] UL Verification Services Inc.
 [ISSUEDATE] 5/4/2017
 [MANUFAC] Tempo Industries Inc
 [LUMCAT] C6S00-12-1012-UNVE5-D35S-LG
 [LUMINAIRE] Gray metal mounting bracket with gray housing and clear pl
 [MORE] astic lens
 [LAMP] 16 White LEDs
 [BALLAST] Magtech M9-U12-0350
 [OTHER] 25.1 C, 120.073 V, 0.0404828 A, 4.81316 W, 0.990183 PF, 59.998
 [MORE] 4 Hz
 [OTHER] This test was performed using the calibrated photodetector met
 [MORE] hod of absolute photometry.

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	548
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	114
Total Luminaire Watts	4.81316
Ballast Factor	1.00
CIE Type	Indirect
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.15 ft
Luminous Width (90-270)	1.00 ft
Luminous Height	0.02 ft



IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-1012-UNVE5-D35S-LG.IES

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	0	0	0
55	0	0	0
65	0	0	0
75	0	0	0
85	470	507	920

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-1012-UNVE5-D35S-LG.IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>
0.0	0.00	0.00	0.00	0.00	0.00
0.5	0.00	0.00	0.00	0.00	0.00
1.0	0.00	0.00	0.00	0.00	0.00
1.5	0.00	0.00	0.00	0.00	0.00
2.0	0.00	0.00	0.00	0.00	0.00
2.5	0.00	0.00	0.00	0.00	0.00
3.0	0.00	0.00	0.00	0.00	0.00
3.5	0.00	0.00	0.00	0.00	0.00
4.0	0.00	0.00	0.00	0.00	0.00
4.5	0.00	0.00	0.00	0.00	0.00
5.0	0.00	0.00	0.00	0.00	0.00
5.5	0.00	0.00	0.00	0.00	0.00
6.0	0.00	0.00	0.00	0.00	0.00
6.5	0.00	0.00	0.00	0.00	0.00
7.0	0.00	0.00	0.00	0.00	0.00
7.5	0.00	0.00	0.00	0.00	0.00
8.0	0.00	0.00	0.00	0.00	0.00
8.5	0.00	0.00	0.00	0.00	0.00
9.0	0.00	0.00	0.00	0.00	0.00
9.5	0.00	0.00	0.00	0.00	0.00
10.0	0.00	0.00	0.00	0.00	0.00
10.5	0.00	0.00	0.00	0.00	0.00
11.0	0.00	0.00	0.00	0.00	0.00
11.5	0.00	0.00	0.00	0.00	0.00
12.0	0.00	0.00	0.00	0.00	0.00
12.5	0.00	0.00	0.00	0.00	0.00
13.0	0.00	0.00	0.00	0.00	0.00
13.5	0.00	0.00	0.00	0.00	0.00
14.0	0.00	0.00	0.00	0.00	0.00
14.5	0.00	0.00	0.00	0.00	0.00
15.0	0.00	0.00	0.00	0.00	0.00
15.5	0.00	0.00	0.00	0.00	0.00
16.0	0.00	0.00	0.00	0.00	0.00
16.5	0.00	0.00	0.00	0.00	0.00
17.0	0.00	0.00	0.00	0.00	0.00
17.5	0.00	0.00	0.00	0.00	0.00
18.0	0.00	0.00	0.00	0.00	0.00
18.5	0.00	0.00	0.00	0.00	0.00
19.0	0.00	0.00	0.00	0.00	0.00
19.5	0.00	0.00	0.00	0.00	0.00
20.0	0.00	0.00	0.00	0.00	0.00
20.5	0.00	0.00	0.00	0.00	0.00
21.0	0.00	0.00	0.00	0.00	0.00
21.5	0.00	0.00	0.00	0.00	0.00
22.0	0.00	0.00	0.00	0.00	0.00
22.5	0.00	0.00	0.00	0.00	0.00
23.0	0.00	0.00	0.00	0.00	0.00
23.5	0.00	0.00	0.00	0.00	0.00
24.0	0.00	0.00	0.00	0.00	0.00
24.5	0.00	0.00	0.00	0.00	0.00
25.0	0.00	0.00	0.00	0.00	0.00
25.5	0.00	0.00	0.00	0.00	0.00
26.0	0.00	0.00	0.00	0.00	0.00
26.5	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-1012-UNVE5-D35S-LG.IES

CANDELA TABULATION - (Cont.)

27.0	0.00	0.00	0.00	0.00	0.00
27.5	0.00	0.00	0.00	0.00	0.00
28.0	0.00	0.00	0.00	0.00	0.00
28.5	0.00	0.00	0.00	0.00	0.00
29.0	0.00	0.00	0.00	0.00	0.00
29.5	0.00	0.00	0.00	0.00	0.00
30.0	0.00	0.00	0.00	0.00	0.00
30.5	0.00	0.00	0.00	0.00	0.00
31.0	0.00	0.00	0.00	0.00	0.00
31.5	0.00	0.00	0.00	0.00	0.00
32.0	0.00	0.00	0.00	0.00	0.00
32.5	0.00	0.00	0.00	0.00	0.00
33.0	0.00	0.00	0.00	0.00	0.00
33.5	0.00	0.00	0.00	0.00	0.00
34.0	0.00	0.00	0.00	0.00	0.00
34.5	0.00	0.00	0.00	0.00	0.00
35.0	0.00	0.00	0.00	0.00	0.00
35.5	0.00	0.00	0.00	0.00	0.00
36.0	0.00	0.00	0.00	0.00	0.00
36.5	0.00	0.00	0.00	0.00	0.00
37.0	0.00	0.00	0.00	0.00	0.00
37.5	0.00	0.00	0.00	0.00	0.00
38.0	0.00	0.00	0.00	0.00	0.00
38.5	0.00	0.00	0.00	0.00	0.00
39.0	0.00	0.00	0.00	0.00	0.00
39.5	0.00	0.00	0.00	0.00	0.00
40.0	0.00	0.00	0.00	0.00	0.00
40.5	0.00	0.00	0.00	0.00	0.00
41.0	0.00	0.00	0.00	0.00	0.00
41.5	0.00	0.00	0.00	0.00	0.00
42.0	0.00	0.00	0.00	0.00	0.00
42.5	0.00	0.00	0.00	0.00	0.00
43.0	0.00	0.00	0.00	0.00	0.00
43.5	0.00	0.00	0.00	0.00	0.00
44.0	0.00	0.00	0.00	0.00	0.00
44.5	0.00	0.00	0.00	0.00	0.00
45.0	0.00	0.00	0.00	0.00	0.00
45.5	0.00	0.00	0.00	0.00	0.00
46.0	0.00	0.00	0.00	0.00	0.00
46.5	0.00	0.00	0.00	0.00	0.00
47.0	0.00	0.00	0.00	0.00	0.00
47.5	0.00	0.00	0.00	0.00	0.00
48.0	0.00	0.00	0.00	0.00	0.00
48.5	0.00	0.00	0.00	0.00	0.00
49.0	0.00	0.00	0.00	0.00	0.00
49.5	0.00	0.00	0.00	0.00	0.00
50.0	0.00	0.00	0.00	0.00	0.00
50.5	0.00	0.00	0.00	0.00	0.00
51.0	0.00	0.00	0.00	0.00	0.00
51.5	0.00	0.00	0.00	0.00	0.00
52.0	0.00	0.00	0.00	0.00	0.00
52.5	0.00	0.00	0.00	0.00	0.00
53.0	0.00	0.00	0.00	0.00	0.00
53.5	0.00	0.00	0.00	0.00	0.00
54.0	0.00	0.00	0.00	0.00	0.00
54.5	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-1012-UNVE5-D35S-LG.IES

CANDELA TABULATION - (Cont.)

55.0	0.00	0.00	0.00	0.00	0.00
55.5	0.00	0.00	0.00	0.00	0.00
56.0	0.00	0.00	0.00	0.00	0.00
56.5	0.00	0.00	0.00	0.00	0.00
57.0	0.00	0.00	0.00	0.00	0.00
57.5	0.00	0.00	0.00	0.00	0.00
58.0	0.00	0.00	0.00	0.00	0.00
58.5	0.00	0.00	0.00	0.00	0.00
59.0	0.00	0.00	0.00	0.00	0.00
59.5	0.00	0.00	0.00	0.00	0.00
60.0	0.00	0.00	0.00	0.00	0.00
60.5	0.00	0.00	0.00	0.00	0.00
61.0	0.00	0.00	0.00	0.00	0.00
61.5	0.00	0.00	0.00	0.00	0.00
62.0	0.00	0.00	0.00	0.00	0.00
62.5	0.00	0.00	0.00	0.00	0.00
63.0	0.00	0.00	0.00	0.00	0.00
63.5	0.00	0.00	0.00	0.00	0.00
64.0	0.00	0.00	0.00	0.00	0.00
64.5	0.00	0.00	0.00	0.00	0.00
65.0	0.00	0.00	0.00	0.00	0.00
65.5	0.00	0.00	0.00	0.00	0.00
66.0	0.00	0.00	0.00	0.00	0.00
66.5	0.00	0.00	0.00	0.00	0.00
67.0	0.00	0.00	0.00	0.00	0.00
67.5	0.00	0.00	0.00	0.00	0.00
68.0	0.00	0.00	0.00	0.00	0.00
68.5	0.00	0.00	0.00	0.00	0.00
69.0	0.00	0.00	0.00	0.00	0.00
69.5	0.00	0.00	0.00	0.00	0.00
70.0	0.00	0.00	0.00	0.00	0.00
70.5	0.00	0.00	0.00	0.00	0.00
71.0	0.00	0.00	0.00	0.00	0.00
71.5	0.00	0.00	0.00	0.00	0.00
72.0	0.00	0.00	0.00	0.00	0.00
72.5	0.00	0.00	0.00	0.00	0.00
73.0	0.00	0.00	0.00	0.00	0.00
73.5	0.00	0.00	0.00	0.00	0.00
74.0	0.00	0.00	0.00	0.00	0.00
74.5	0.00	0.00	0.00	0.00	0.00
75.0	0.00	0.00	0.00	0.00	0.00
75.5	0.00	0.00	0.00	0.00	0.00
76.0	0.00	0.00	0.00	0.00	0.00
76.5	0.00	0.00	0.00	0.00	0.00
77.0	0.00	0.00	0.00	0.00	0.00
77.5	0.04	0.03	0.00	0.00	0.00
78.0	0.06	0.07	0.00	0.00	0.00
78.5	0.14	0.11	0.00	0.00	0.00
79.0	0.21	0.17	0.00	0.00	0.00
79.5	0.29	0.26	0.01	0.00	0.00
80.0	0.37	0.35	0.06	0.00	0.00
80.5	0.46	0.43	0.13	0.00	0.00
81.0	0.54	0.54	0.19	0.00	0.00
81.5	0.63	0.65	0.27	0.00	0.00
82.0	0.74	0.76	0.40	0.00	0.00
82.5	0.85	0.88	0.53	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-1012-UNVE5-D35S-LG.IES

CANDELA TABULATION - (Cont.)

83.0	0.97	1.01	0.68	0.00	0.00
83.5	1.08	1.14	0.84	0.00	0.00
84.0	1.21	1.28	1.02	0.00	0.00
84.5	1.34	1.44	1.21	0.00	0.00
85.0	1.47	1.60	1.40	0.02	1.35
85.5	1.64	1.78	1.62	0.06	1.32
86.0	1.80	1.96	1.86	0.12	1.24
86.5	1.98	2.16	2.11	0.20	1.11
87.0	2.16	2.38	2.38	0.29	1.77
87.5	2.37	2.61	2.66	0.46	1.51
88.0	2.59	2.86	2.97	0.67	1.26
88.5	2.82	3.14	3.30	0.92	1.09
89.0	3.09	3.42	3.64	1.22	0.98
89.5	3.37	3.73	4.01	1.54	0.96
90.0	3.69	4.07	4.41	1.92	1.02
90.5	4.03	4.43	4.83	2.35	1.14
91.0	4.40	4.82	5.26	2.80	1.36
91.5	4.79	5.25	5.73	3.27	1.63
92.0	5.22	5.69	6.21	3.79	1.97
92.5	5.71	6.17	6.73	4.32	2.37
93.0	6.20	6.69	7.26	4.87	2.83
93.5	6.76	7.24	7.84	5.46	3.35
94.0	7.35	7.83	8.44	6.07	3.91
94.5	7.97	8.45	9.08	6.70	4.51
95.0	8.64	9.12	9.75	7.36	5.17
95.5	9.38	9.83	10.42	8.06	5.86
96.0	10.13	10.57	11.16	8.79	6.60
96.5	10.95	11.37	11.94	9.55	7.37
97.0	11.81	12.19	12.75	10.35	8.21
97.5	12.69	13.05	13.58	11.14	9.13
98.0	13.63	13.97	14.44	11.97	10.02
98.5	14.62	14.90	15.35	12.82	10.94
99.0	15.63	15.89	16.27	13.71	11.91
99.5	16.69	16.91	17.24	14.64	12.90
100.0	17.77	17.97	18.25	15.60	13.92
100.5	18.96	19.08	19.28	16.57	14.95
101.0	20.16	20.20	20.36	17.60	16.00
101.5	21.37	21.39	21.47	18.66	17.07
102.0	22.63	22.61	22.60	19.79	18.16
102.5	23.97	23.87	23.81	20.90	19.36
103.0	25.34	25.14	25.02	22.06	20.53
103.5	26.73	26.47	26.30	23.29	21.78
104.0	28.17	27.86	27.63	24.51	23.10
104.5	29.63	29.28	28.95	25.80	24.41
105.0	31.11	30.70	30.33	27.12	25.79
105.5	32.67	32.21	31.75	28.45	27.17
106.0	34.25	33.70	33.25	29.82	28.61
106.5	35.81	35.21	34.71	31.24	30.13
107.0	37.40	36.78	36.24	32.70	31.64
107.5	39.09	38.40	37.77	34.23	33.18
108.0	40.77	40.04	39.36	35.81	34.78
108.5	42.42	41.69	40.97	37.41	36.37
109.0	44.12	43.40	42.58	39.06	38.00
109.5	45.83	45.15	44.25	40.74	39.68
110.0	47.62	46.91	45.89	42.45	41.46
110.5	49.42	48.65	47.58	44.16	43.31

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-1012-UNVE5-D35S-LG.IES

CANDELA TABULATION - (Cont.)

111.0	51.27	50.45	49.27	45.90	45.21
111.5	53.14	52.23	50.99	47.71	47.10
112.0	55.03	54.05	52.69	49.52	49.00
112.5	56.86	55.91	54.40	51.41	51.00
113.0	58.76	57.74	56.16	53.22	53.00
113.5	60.69	59.61	57.88	55.11	54.99
114.0	62.63	61.56	59.64	57.04	57.08
114.5	64.51	63.46	61.32	58.94	59.06
115.0	66.49	65.34	63.04	60.91	60.97
115.5	68.49	67.26	64.78	62.86	62.99
116.0	70.38	69.09	66.47	64.86	65.06
116.5	72.33	70.93	68.17	66.86	67.09
117.0	74.25	72.81	69.91	68.87	69.10
117.5	76.23	74.65	71.65	70.89	71.23
118.0	78.14	76.41	73.40	72.90	73.29
118.5	80.07	78.22	75.22	74.95	75.28
119.0	81.92	80.01	77.03	76.98	77.44
119.5	83.72	81.73	78.78	78.95	79.28
120.0	85.65	83.38	80.54	80.92	81.31
120.5	87.44	85.11	82.36	82.96	83.24
121.0	89.15	86.84	84.16	84.94	85.05
121.5	90.86	88.58	85.97	86.91	87.01
122.0	92.61	90.12	87.74	88.82	88.82
122.5	94.20	91.71	89.40	90.63	90.83
123.0	95.79	93.26	91.23	92.55	92.80
123.5	97.00	94.93	92.93	94.35	94.55
124.0	98.56	96.58	94.88	96.25	96.38
124.5	100.20	98.10	96.57	98.09	98.42
125.0	101.70	99.53	98.31	99.72	100.10
125.5	103.10	101.00	100.10	101.50	101.90
126.0	104.60	102.70	101.80	103.30	103.60
126.5	106.20	104.20	103.70	105.20	105.50
127.0	107.60	105.90	105.40	106.90	107.10
127.5	109.30	107.40	107.10	108.70	108.90
128.0	110.80	108.90	108.80	110.50	110.60
128.5	112.10	110.50	110.70	112.20	112.20
129.0	113.60	112.20	112.00	113.90	113.90
129.5	115.20	113.60	113.90	115.60	115.50
130.0	116.70	115.20	115.60	117.20	116.70
130.5	118.20	116.90	117.20	118.70	118.40
131.0	119.60	118.40	118.90	120.40	120.20
131.5	121.00	120.00	120.50	121.90	121.60
132.0	122.60	121.60	122.10	123.50	123.30
132.5	124.30	123.10	123.70	125.10	124.80
133.0	125.70	124.50	125.20	126.60	126.40
133.5	127.40	126.00	126.80	128.30	128.00
134.0	128.70	127.60	128.40	129.80	129.30
134.5	130.20	129.10	129.90	131.20	130.70
135.0	131.70	130.60	131.20	132.90	132.30
135.5	133.20	132.20	132.80	134.30	133.70
136.0	134.70	133.70	134.30	135.80	135.00
136.5	136.10	135.10	135.80	137.20	136.20
137.0	137.70	136.60	137.30	138.70	137.70
137.5	139.30	138.00	138.70	140.00	139.00
138.0	140.50	139.40	140.30	141.30	140.30
138.5	141.90	140.90	141.70	142.90	141.60

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-1012-UNVE5-D35S-LG.IES

CANDELA TABULATION - (Cont.)

139.0	143.50	142.20	143.00	144.00	143.00
139.5	144.90	143.60	144.40	145.50	144.60
140.0	146.30	144.90	145.70	146.70	145.80
140.5	147.70	146.20	146.90	148.00	147.20
141.0	149.10	147.60	148.30	149.30	148.50
141.5	150.20	148.90	149.70	150.30	149.70
142.0	151.30	149.70	150.50	151.50	150.50
142.5	152.70	151.20	152.00	152.60	151.70
143.0	154.20	152.60	153.20	153.80	153.10
143.5	155.20	153.80	154.40	155.00	154.20
144.0	156.60	155.10	155.60	156.20	155.40
144.5	157.90	156.10	156.90	157.50	156.60
145.0	159.10	157.40	157.90	158.60	157.80
145.5	160.20	158.40	159.00	159.80	158.80
146.0	161.40	159.60	160.10	160.90	160.00
146.5	162.70	160.70	161.20	161.80	161.00
147.0	163.60	161.70	162.10	162.90	162.00
147.5	164.60	162.80	163.20	164.10	163.10
148.0	165.60	163.90	164.20	165.30	164.20
148.5	166.60	164.90	165.20	166.10	165.10
149.0	167.60	165.80	166.30	167.20	165.90
149.5	168.50	166.80	167.20	168.00	166.90
150.0	169.60	167.70	168.00	169.00	167.90
150.5	170.50	168.70	169.00	170.10	168.80
151.0	171.50	169.50	169.90	170.80	169.90
151.5	172.40	170.40	170.70	171.90	170.80
152.0	173.40	171.30	171.70	172.70	171.50
152.5	174.10	172.10	172.50	173.50	172.50
153.0	175.00	173.00	173.50	174.40	173.30
153.5	175.90	173.90	174.20	175.30	174.20
154.0	176.70	174.70	175.20	176.00	175.10
154.5	177.60	175.60	175.90	176.70	175.90
155.0	178.40	176.30	176.60	177.30	176.70
155.5	179.50	177.10	177.40	178.20	177.30
156.0	180.20	178.00	178.10	178.80	178.10
156.5	180.70	178.60	179.00	179.60	178.70
157.0	181.70	179.30	179.60	180.20	179.60
157.5	182.10	180.20	180.30	180.90	180.20
158.0	183.00	180.70	181.00	181.50	180.80
158.5	183.50	181.40	181.70	181.90	181.60
159.0	184.20	182.20	182.30	182.60	182.10
159.5	184.90	182.70	183.00	183.20	182.60
160.0	185.50	183.30	183.60	183.70	183.10
160.5	186.20	183.90	184.30	184.20	183.60
161.0	187.10	184.40	184.70	184.70	183.90
161.5	187.60	184.90	185.30	185.20	184.40
162.0	188.00	185.60	185.80	185.80	185.00
162.5	188.70	186.30	186.50	186.30	185.60
163.0	189.20	186.70	186.80	186.90	186.00
163.5	189.60	187.20	187.40	187.30	186.50
164.0	190.20	187.70	187.90	187.60	186.80
164.5	190.70	188.10	188.10	187.80	187.10
165.0	191.20	188.50	188.60	188.20	187.30
165.5	191.40	189.00	189.20	188.70	187.90
166.0	191.90	189.40	189.60	189.10	188.30
166.5	192.40	189.90	190.00	189.40	188.70

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-1012-UNVE5-D35S-LG.IES

CANDELA TABULATION - (Cont.)

167.0	192.60	190.20	190.40	189.80	189.00
167.5	193.10	190.70	190.80	190.00	189.30
168.0	193.50	191.10	191.10	190.50	189.60
168.5	194.20	191.50	191.50	190.80	189.90
169.0	194.50	191.90	191.70	191.20	190.20
169.5	194.80	192.10	192.00	191.40	190.40
170.0	195.10	192.60	192.40	191.70	190.70
170.5	195.40	192.90	192.60	192.10	191.00
171.0	195.70	193.00	192.90	192.40	191.10
171.5	196.00	193.30	193.10	192.50	191.20
172.0	196.30	193.50	193.40	192.70	191.80
172.5	196.50	193.80	193.50	192.80	191.80
173.0	196.80	194.00	193.60	193.20	192.00
173.5	196.70	194.10	193.80	193.20	192.30
174.0	197.00	194.20	194.00	193.60	192.20
174.5	197.20	194.40	194.30	193.60	192.40
175.0	197.40	194.50	194.30	193.80	192.60
175.5	197.50	194.70	194.50	193.90	192.70
176.0	197.60	194.80	194.50	194.00	192.70
176.5	197.80	194.90	194.60	194.10	192.80
177.0	197.50	194.80	194.70	194.30	192.90
177.5	198.00	194.90	194.70	194.30	193.10
178.0	197.80	194.90	195.00	194.40	193.20
178.5	197.80	195.00	194.90	194.60	193.10
179.0	197.90	195.10	194.80	194.50	193.10
179.5	197.90	195.10	194.90	194.60	193.10
180.0	195.10	195.10	195.10	195.10	195.10

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-1012-UNVE5-D35S-LG.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	0.00	N.A.	0.00
0-30	0.00	N.A.	0.00
0-40	0.00	N.A.	0.00
0-60	0.00	N.A.	0.00
0-80	0.02	N.A.	0.00
0-90	1.37	N.A.	0.30
10-90	1.37	N.A.	0.30
20-40	0.00	N.A.	0.00
20-50	0.00	N.A.	0.00
40-70	0.00	N.A.	0.00
60-80	0.02	N.A.	0.00
70-80	0.02	N.A.	0.00
80-90	1.35	N.A.	0.20
90-110	41.03	N.A.	7.50
90-120	103.65	N.A.	18.90
90-130	192.62	N.A.	35.20
90-150	392.89	N.A.	71.70
90-180	546.25	N.A.	99.80
110-180	505.22	N.A.	92.30
0-180	547.62	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	0.00
10-20	0.00
20-30	0.00
30-40	0.00
40-50	0.00
50-60	0.00
60-70	0.00
70-80	0.02
80-90	1.35
90-100	9.67
100-110	31.35
110-120	62.62
120-130	88.97
130-140	101.48
140-150	98.78
150-160	81.56
160-170	53.31
170-180	18.49


IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-1012-UNVE5-D35S-LG.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC RW	80				70				50			30			10			0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10	0
1	87	82	79	76	74	71	68	65	48	47	45	28	27	26	9	9	9	0
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7	0
3	72	63	56	51	61	54	49	44	37	34	31	21	20	18	7	6	6	0
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	0
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4	0
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4	0
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3	0
8	46	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	0
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3	0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	0

POLAR GRAPH

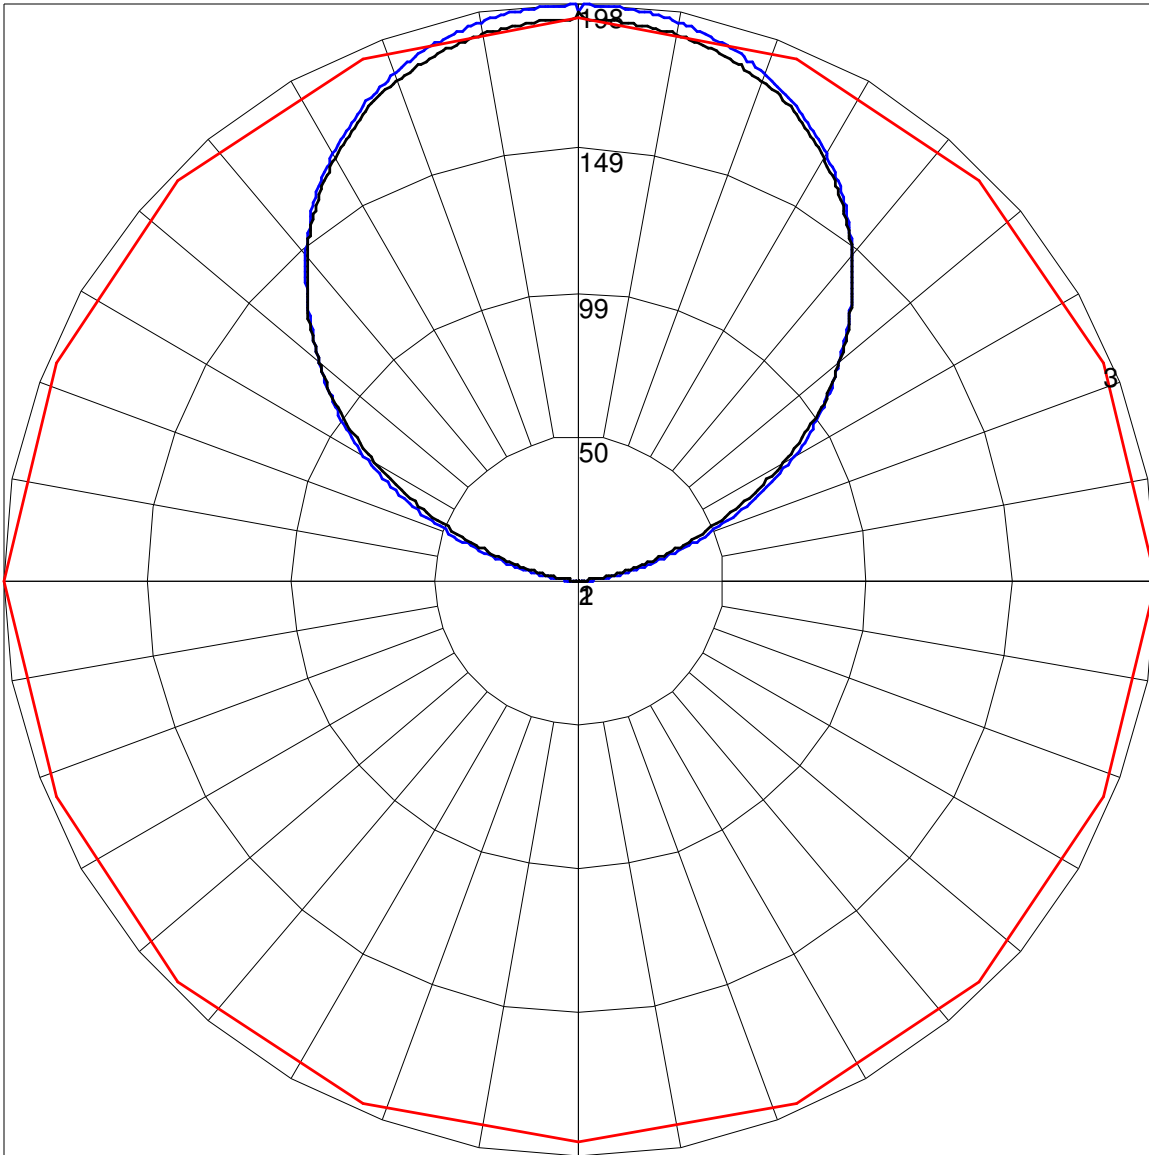

Maximum Candela = 198 Located At Horizontal Angle = 0, Vertical Angle = 177.5
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Vertical Plane Through Horizontal Angles (90 - 270)
3 - Horizontal Cone Through Vertical Angle (177.5) (Through Max. Cd.)