



1961 McGaw Ave, Irvine, CA 92614
 phone: 949.442.1601
 email: info@tempolc.com

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-1012-UNVE88-D35S-LG.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TEST] 11750395.09
 [ECN] 3074
 [TESTLAB] UL Verification Services Inc.
 [ISSUEDATE] 5/5/2017
 [MANUFAC] Tempo Industries Inc
 [LUMCAT] C6S00-12-1012-UNVE88-D35S-LG
 [LUMINAIRE] Gray metal mounting bracket with gray housing and clear pl
 [MORE] astic lens
 [LAMP] 20 White LEDs
 [BALLAST] Magtech M18-U18-500
 [OTHER] 25 C, 120.061 V, 0.0729327 A, 8.67311 W, 0.990492 PF, 59.9983
 [MORE] Hz
 [OTHER] This test was performed using the calibrated photodetector met
 [MORE] hod of absolute photometry.

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	981
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	113
Total Luminaire Watts	8.67311
Ballast Factor	1.00
CIE Type	Indirect
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.15 ft
Luminous Width (90-270)	1.00 ft
Luminous Height	0.02 ft



IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-1012-UNVE88-D35S-LG.IES

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	0	0	0
55	0	0	0
65	0	0	0
75	0	0	0
85	889	989	2822

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-1012-UNVE88-D35S-LG.IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>
0.0	0.00	0.00	0.00	0.00	0.00
0.5	0.00	0.00	0.00	0.00	0.00
1.0	0.00	0.00	0.00	0.00	0.00
1.5	0.00	0.00	0.00	0.00	0.00
2.0	0.00	0.00	0.00	0.00	0.00
2.5	0.00	0.00	0.00	0.00	0.00
3.0	0.00	0.00	0.00	0.00	0.00
3.5	0.00	0.00	0.00	0.00	0.00
4.0	0.00	0.00	0.00	0.00	0.00
4.5	0.00	0.00	0.00	0.00	0.00
5.0	0.00	0.00	0.00	0.00	0.00
5.5	0.00	0.00	0.00	0.00	0.00
6.0	0.00	0.00	0.00	0.00	0.00
6.5	0.00	0.00	0.00	0.00	0.00
7.0	0.00	0.00	0.00	0.00	0.00
7.5	0.00	0.00	0.00	0.00	0.00
8.0	0.00	0.00	0.00	0.00	0.00
8.5	0.00	0.00	0.00	0.00	0.00
9.0	0.00	0.00	0.00	0.00	0.00
9.5	0.00	0.00	0.00	0.00	0.00
10.0	0.00	0.00	0.00	0.00	0.00
10.5	0.00	0.00	0.00	0.00	0.00
11.0	0.00	0.00	0.00	0.00	0.00
11.5	0.00	0.00	0.00	0.00	0.00
12.0	0.00	0.00	0.00	0.00	0.00
12.5	0.00	0.00	0.00	0.00	0.00
13.0	0.00	0.00	0.00	0.00	0.00
13.5	0.00	0.00	0.00	0.00	0.00
14.0	0.00	0.00	0.00	0.00	0.00
14.5	0.00	0.00	0.00	0.00	0.00
15.0	0.00	0.00	0.00	0.00	0.00
15.5	0.00	0.00	0.00	0.00	0.00
16.0	0.00	0.00	0.00	0.00	0.00
16.5	0.00	0.00	0.00	0.00	0.00
17.0	0.00	0.00	0.00	0.00	0.00
17.5	0.00	0.00	0.00	0.00	0.00
18.0	0.00	0.00	0.00	0.00	0.00
18.5	0.00	0.00	0.00	0.00	0.00
19.0	0.00	0.00	0.00	0.00	0.00
19.5	0.00	0.00	0.00	0.00	0.00
20.0	0.00	0.00	0.00	0.00	0.00
20.5	0.00	0.00	0.00	0.00	0.00
21.0	0.00	0.00	0.00	0.00	0.00
21.5	0.00	0.00	0.00	0.00	0.00
22.0	0.00	0.00	0.00	0.00	0.00
22.5	0.00	0.00	0.00	0.00	0.00
23.0	0.00	0.00	0.00	0.00	0.00
23.5	0.00	0.00	0.00	0.00	0.00
24.0	0.00	0.00	0.00	0.00	0.00
24.5	0.00	0.00	0.00	0.00	0.00
25.0	0.00	0.00	0.00	0.00	0.00
25.5	0.00	0.00	0.00	0.00	0.00
26.0	0.00	0.00	0.00	0.00	0.00
26.5	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-1012-UNVE88-D35S-LG.IES

CANDELA TABULATION - (Cont.)

27.0	0.00	0.00	0.00	0.00	0.00
27.5	0.00	0.00	0.00	0.00	0.00
28.0	0.00	0.00	0.00	0.00	0.00
28.5	0.00	0.00	0.00	0.00	0.00
29.0	0.00	0.00	0.00	0.00	0.00
29.5	0.00	0.00	0.00	0.00	0.00
30.0	0.00	0.00	0.00	0.00	0.00
30.5	0.00	0.00	0.00	0.00	0.00
31.0	0.00	0.00	0.00	0.00	0.00
31.5	0.00	0.00	0.00	0.00	0.00
32.0	0.00	0.00	0.00	0.00	0.00
32.5	0.00	0.00	0.00	0.00	0.00
33.0	0.00	0.00	0.00	0.00	0.00
33.5	0.00	0.00	0.00	0.00	0.00
34.0	0.00	0.00	0.00	0.00	0.00
34.5	0.00	0.00	0.00	0.00	0.00
35.0	0.00	0.00	0.00	0.00	0.00
35.5	0.00	0.00	0.00	0.00	0.00
36.0	0.00	0.00	0.00	0.00	0.00
36.5	0.00	0.00	0.00	0.00	0.00
37.0	0.00	0.00	0.00	0.00	0.00
37.5	0.00	0.00	0.00	0.00	0.00
38.0	0.00	0.00	0.00	0.00	0.00
38.5	0.00	0.00	0.00	0.00	0.00
39.0	0.00	0.00	0.00	0.00	0.00
39.5	0.00	0.00	0.00	0.00	0.00
40.0	0.00	0.00	0.00	0.00	0.00
40.5	0.00	0.00	0.00	0.00	0.00
41.0	0.00	0.00	0.00	0.00	0.00
41.5	0.00	0.00	0.00	0.00	0.00
42.0	0.00	0.00	0.00	0.00	0.00
42.5	0.00	0.00	0.00	0.00	0.00
43.0	0.00	0.00	0.00	0.00	0.00
43.5	0.00	0.00	0.00	0.00	0.00
44.0	0.00	0.00	0.00	0.00	0.00
44.5	0.00	0.00	0.00	0.00	0.00
45.0	0.00	0.00	0.00	0.00	0.00
45.5	0.00	0.00	0.00	0.00	0.00
46.0	0.00	0.00	0.00	0.00	0.00
46.5	0.00	0.00	0.00	0.00	0.00
47.0	0.00	0.00	0.00	0.00	0.00
47.5	0.00	0.00	0.00	0.00	0.00
48.0	0.00	0.00	0.00	0.00	0.00
48.5	0.00	0.00	0.00	0.00	0.00
49.0	0.00	0.00	0.00	0.00	0.00
49.5	0.00	0.00	0.00	0.00	0.00
50.0	0.00	0.00	0.00	0.00	0.00
50.5	0.00	0.00	0.00	0.00	0.00
51.0	0.00	0.00	0.00	0.00	0.00
51.5	0.00	0.00	0.00	0.00	0.00
52.0	0.00	0.00	0.00	0.00	0.00
52.5	0.00	0.00	0.00	0.00	0.00
53.0	0.00	0.00	0.00	0.00	0.00
53.5	0.00	0.00	0.00	0.00	0.00
54.0	0.00	0.00	0.00	0.00	0.00
54.5	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-1012-UNVE88-D35S-LG.IES

CANDELA TABULATION - (Cont.)

55.0	0.00	0.00	0.00	0.00	0.00
55.5	0.00	0.00	0.00	0.00	0.00
56.0	0.00	0.00	0.00	0.00	0.00
56.5	0.00	0.00	0.00	0.00	0.00
57.0	0.00	0.00	0.00	0.00	0.00
57.5	0.00	0.00	0.00	0.00	0.00
58.0	0.00	0.00	0.00	0.00	0.00
58.5	0.00	0.00	0.00	0.00	0.00
59.0	0.00	0.00	0.00	0.00	0.00
59.5	0.00	0.00	0.00	0.00	0.00
60.0	0.00	0.00	0.00	0.00	0.00
60.5	0.00	0.00	0.00	0.00	0.00
61.0	0.00	0.00	0.00	0.00	0.00
61.5	0.00	0.00	0.00	0.00	0.00
62.0	0.00	0.00	0.00	0.00	0.00
62.5	0.00	0.00	0.00	0.00	0.00
63.0	0.00	0.00	0.00	0.00	0.00
63.5	0.00	0.00	0.00	0.00	0.00
64.0	0.00	0.00	0.00	0.00	0.00
64.5	0.00	0.00	0.00	0.00	0.00
65.0	0.00	0.00	0.00	0.00	0.00
65.5	0.00	0.00	0.00	0.00	0.00
66.0	0.00	0.00	0.00	0.00	0.00
66.5	0.00	0.00	0.00	0.00	0.00
67.0	0.00	0.00	0.00	0.00	0.00
67.5	0.00	0.00	0.00	0.00	0.00
68.0	0.00	0.00	0.00	0.00	0.00
68.5	0.00	0.00	0.00	0.00	0.00
69.0	0.00	0.00	0.00	0.00	0.00
69.5	0.00	0.00	0.00	0.00	0.00
70.0	0.00	0.00	0.00	0.00	0.00
70.5	0.00	0.00	0.00	0.00	0.00
71.0	0.00	0.00	0.00	0.00	0.00
71.5	0.00	0.00	0.00	0.00	0.00
72.0	0.00	0.00	0.00	0.00	0.00
72.5	0.00	0.00	0.00	0.00	0.00
73.0	0.00	0.00	0.00	0.00	0.00
73.5	0.00	0.00	0.00	0.00	0.00
74.0	0.00	0.00	0.00	0.00	0.00
74.5	0.00	0.00	0.00	0.00	0.00
75.0	0.00	0.00	0.00	0.00	0.00
75.5	0.00	0.03	0.00	0.00	0.00
76.0	0.01	0.07	0.00	0.00	0.00
76.5	0.07	0.11	0.00	0.00	0.00
77.0	0.12	0.16	0.00	0.00	0.00
77.5	0.22	0.25	0.00	0.00	0.00
78.0	0.34	0.36	0.02	0.00	0.00
78.5	0.46	0.46	0.06	0.00	0.00
79.0	0.59	0.59	0.11	0.00	0.00
79.5	0.72	0.74	0.16	0.00	0.00
80.0	0.87	0.90	0.27	0.00	0.00
80.5	1.02	1.07	0.41	0.00	0.00
81.0	1.17	1.25	0.56	0.00	0.00
81.5	1.34	1.44	0.75	0.00	1.95
82.0	1.51	1.64	0.96	0.00	1.98
82.5	1.69	1.86	1.20	0.00	2.01

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-1012-UNVE88-D35S-LG.IES

CANDELA TABULATION - (Cont.)

83.0	1.89	2.08	1.45	0.01	4.31
83.5	2.09	2.32	1.74	0.03	4.32
84.0	2.30	2.57	2.04	0.06	4.32
84.5	2.54	2.83	2.36	0.11	4.25
85.0	2.78	3.13	2.73	0.17	4.14
85.5	3.03	3.44	3.09	0.27	3.98
86.0	3.33	3.77	3.51	0.40	3.67
86.5	3.62	4.13	3.94	0.58	3.36
87.0	3.95	4.52	4.42	0.82	3.04
87.5	4.31	4.93	4.91	1.13	2.66
88.0	4.69	5.38	5.45	1.50	2.36
88.5	5.10	5.87	6.01	1.95	2.14
89.0	5.56	6.39	6.61	2.45	1.99
89.5	6.04	6.94	7.27	3.06	1.92
90.0	6.56	7.55	7.96	3.74	2.03
90.5	7.11	8.19	8.68	4.47	2.30
91.0	7.78	8.86	9.46	5.26	2.68
91.5	8.45	9.62	10.28	6.11	3.22
92.0	9.20	10.42	11.13	7.00	3.85
92.5	10.01	11.28	12.02	7.95	4.57
93.0	10.90	12.18	12.99	8.97	5.43
93.5	11.87	13.16	13.97	10.02	6.35
94.0	12.88	14.21	15.03	11.15	7.38
94.5	13.99	15.32	16.15	12.30	8.47
95.0	15.16	16.51	17.30	13.51	9.63
95.5	16.42	17.76	18.54	14.75	10.87
96.0	17.80	19.10	19.81	16.07	12.18
96.5	19.22	20.49	21.19	17.42	13.53
97.0	20.70	21.95	22.62	18.80	14.98
97.5	22.33	23.50	24.08	20.27	16.50
98.0	23.99	25.12	25.57	21.78	18.08
98.5	25.77	26.82	27.16	23.33	19.75
99.0	27.60	28.60	28.81	24.92	21.50
99.5	29.55	30.52	30.52	26.60	23.29
100.0	31.50	32.44	32.31	28.31	25.09
100.5	33.56	34.42	34.12	30.06	27.02
101.0	35.77	36.51	36.09	31.89	28.96
101.5	37.92	38.71	38.06	33.81	30.95
102.0	40.24	40.91	40.11	35.76	33.03
102.5	42.60	43.20	42.31	37.80	35.09
103.0	44.92	45.56	44.55	39.85	37.19
103.5	47.52	47.96	46.80	42.00	39.44
104.0	49.99	50.40	49.16	44.22	41.61
104.5	52.55	52.98	51.56	46.48	44.02
105.0	55.45	55.63	54.09	48.81	46.37
105.5	58.14	58.27	56.64	51.30	48.90
106.0	61.02	60.96	59.21	53.73	51.48
106.5	63.92	63.72	61.90	56.24	54.07
107.0	66.87	66.58	64.64	58.82	56.67
107.5	69.73	69.49	67.53	61.44	59.41
108.0	72.75	72.47	70.38	64.12	62.30
108.5	76.01	75.42	73.29	66.98	65.19
109.0	79.11	78.42	76.23	69.85	68.01
109.5	82.33	81.43	79.17	72.76	70.97
110.0	85.29	84.36	82.20	75.74	73.95
110.5	88.51	87.48	85.11	78.78	77.05

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-1012-UNVE88-D35S-LG.IES

CANDELA TABULATION - (Cont.)

111.0	91.77	90.67	88.03	81.91	80.12
111.5	94.54	93.83	91.26	85.15	83.37
112.0	97.94	97.11	94.26	88.25	86.91
112.5	101.40	100.40	97.32	91.65	90.07
113.0	104.50	103.60	100.40	94.86	93.56
113.5	108.00	106.80	103.40	98.28	97.08
114.0	111.20	110.10	106.70	101.70	100.60
114.5	114.30	113.40	109.80	105.10	104.40
115.0	118.20	116.80	112.90	108.40	108.00
115.5	121.70	120.20	115.80	112.00	111.60
116.0	124.90	123.70	119.10	115.40	115.10
116.5	128.30	126.80	122.20	119.10	118.80
117.0	131.70	130.30	125.20	122.50	122.60
117.5	135.30	133.40	128.50	126.30	126.40
118.0	138.70	137.00	131.50	129.70	130.00
118.5	141.80	140.40	134.70	133.20	133.30
119.0	145.30	143.60	137.90	137.10	137.10
119.5	148.60	146.90	141.00	140.60	141.00
120.0	151.90	149.80	144.30	144.20	144.50
120.5	155.10	153.00	147.60	147.80	148.10
121.0	158.20	156.00	150.60	151.00	151.70
121.5	161.10	159.10	153.80	154.70	155.30
122.0	164.50	162.00	157.00	158.10	158.60
122.5	167.60	164.80	160.10	161.60	162.00
123.0	170.50	167.60	163.30	165.10	165.50
123.5	173.20	170.60	166.40	168.70	168.90
124.0	176.40	173.40	169.50	172.10	172.30
124.5	179.20	176.40	172.80	175.40	175.80
125.0	182.10	179.20	175.90	178.80	179.10
125.5	184.80	182.00	179.10	182.00	182.30
126.0	187.90	184.80	182.30	185.30	185.60
126.5	190.40	187.60	185.60	188.50	188.80
127.0	193.30	190.20	188.80	191.70	191.60
127.5	195.90	193.00	191.80	194.80	195.00
128.0	198.50	195.90	195.10	198.10	198.40
128.5	201.40	198.60	198.00	201.20	201.40
129.0	203.70	201.30	201.10	204.30	204.50
129.5	206.50	204.00	204.10	207.60	207.60
130.0	209.30	206.80	206.90	210.40	210.60
130.5	212.10	209.60	209.90	213.40	213.30
131.0	214.50	212.10	212.80	216.20	216.50
131.5	217.10	214.80	215.60	218.90	219.10
132.0	220.00	217.30	218.50	221.80	222.10
132.5	222.60	220.10	221.30	224.70	224.70
133.0	225.10	222.90	223.90	227.40	227.20
133.5	227.90	225.50	226.90	230.10	229.80
134.0	230.50	228.20	229.70	232.80	232.40
134.5	233.30	231.00	232.50	235.40	234.80
135.0	235.80	233.60	235.20	237.80	237.60
135.5	238.70	236.30	237.70	240.40	240.20
136.0	241.10	239.20	240.60	243.10	242.80
136.5	243.80	241.70	243.10	245.80	245.00
137.0	246.60	244.30	245.70	248.40	247.50
137.5	248.90	246.80	248.30	250.60	250.00
138.0	251.60	249.30	250.80	253.00	252.20
138.5	254.10	252.20	253.40	255.20	254.50

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-1012-UNVE88-D35S-LG.IES

CANDELA TABULATION - (Cont.)

139.0	256.50	254.50	255.80	257.30	256.60
139.5	259.40	256.80	258.40	259.70	258.90
140.0	261.70	259.40	260.80	262.00	261.30
140.5	264.30	261.80	263.10	264.10	263.60
141.0	266.90	264.20	265.50	266.50	266.10
141.5	269.00	266.30	267.60	268.50	268.40
142.0	271.50	268.70	269.50	270.70	270.00
142.5	273.50	270.80	271.90	273.10	272.60
143.0	275.60	273.20	274.00	275.20	274.50
143.5	278.10	275.40	276.10	277.60	276.60
144.0	280.50	277.50	278.30	279.50	278.70
144.5	282.40	279.90	280.40	281.80	280.70
145.0	284.60	281.90	282.30	283.70	282.60
145.5	286.70	284.10	284.60	285.60	284.50
146.0	288.80	286.30	286.60	287.60	286.60
146.5	290.30	288.30	288.40	289.70	288.30
147.0	292.80	289.90	290.60	291.20	290.00
147.5	294.60	291.80	292.20	293.30	291.90
148.0	296.30	293.90	294.30	295.20	293.90
148.5	298.00	295.40	295.70	296.80	295.60
149.0	300.10	297.50	297.70	298.30	297.30
149.5	301.70	298.80	299.60	300.10	299.10
150.0	304.00	300.60	301.00	301.90	301.00
150.5	305.60	302.30	302.90	303.60	302.50
151.0	307.10	303.90	304.40	305.20	303.90
151.5	308.80	305.70	306.20	306.70	305.80
152.0	310.50	307.20	307.50	308.40	307.30
152.5	312.20	308.90	309.40	309.80	308.80
153.0	313.30	310.50	310.60	311.30	310.30
153.5	314.90	312.00	312.20	312.80	311.70
154.0	316.90	313.40	313.50	314.20	313.00
154.5	318.40	314.60	315.10	315.60	314.70
155.0	319.40	316.20	316.50	317.30	316.40
155.5	321.40	317.30	318.10	318.20	317.90
156.0	322.50	318.80	319.40	319.70	319.20
156.5	323.50	319.90	320.70	321.30	320.30
157.0	325.30	321.60	322.00	322.30	321.80
157.5	326.50	322.40	323.30	323.30	323.00
158.0	327.70	323.90	324.60	324.60	324.20
158.5	328.40	325.00	325.80	325.90	325.50
159.0	329.90	326.20	327.00	327.10	326.40
159.5	330.90	327.60	328.50	328.10	327.60
160.0	332.00	328.80	329.50	329.10	328.80
160.5	333.20	329.90	330.50	330.30	329.50
161.0	334.60	330.80	331.20	331.20	330.50
161.5	335.60	331.70	332.40	332.20	331.20
162.0	336.30	332.30	333.30	333.30	332.50
162.5	337.20	333.80	334.40	334.50	333.40
163.0	338.50	334.20	335.40	335.20	333.60
163.5	339.10	335.10	336.30	335.80	334.60
164.0	340.30	335.90	337.30	336.70	335.10
164.5	341.40	336.90	338.20	337.70	335.60
165.0	342.10	338.00	338.60	338.30	336.80
165.5	342.40	338.70	339.60	339.10	337.40
166.0	343.30	339.40	340.30	339.80	337.70
166.5	344.40	340.10	341.10	340.60	338.70

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-1012-UNVE88-D35S-LG.IES

CANDELA TABULATION - (Cont.)

167.0	344.90	340.80	342.10	341.20	339.30
167.5	345.80	341.50	342.60	341.80	340.10
168.0	346.30	342.70	343.10	342.30	339.80
168.5	346.90	343.20	343.80	343.40	340.90
169.0	348.40	343.90	344.50	344.00	341.40
169.5	348.70	344.70	345.20	344.40	341.70
170.0	349.10	345.10	345.40	345.30	342.80
170.5	349.70	345.70	345.80	346.00	343.00
171.0	350.80	346.00	346.00	345.90	343.70
171.5	351.30	346.60	346.80	346.80	344.10
172.0	351.50	347.30	347.40	347.20	344.70
172.5	352.10	347.80	347.60	347.60	345.40
173.0	352.50	347.80	348.00	347.80	345.00
173.5	352.80	348.50	348.80	348.20	345.40
174.0	353.50	348.60	348.70	348.50	346.00
174.5	353.40	349.00	348.90	348.90	346.80
175.0	354.10	349.60	349.30	349.20	346.60
175.5	354.20	349.50	349.70	349.50	346.90
176.0	354.10	350.20	349.70	349.80	347.30
176.5	354.60	350.10	350.20	349.80	347.60
177.0	354.60	350.20	350.20	350.30	347.80
177.5	354.80	350.50	350.50	350.50	347.90
178.0	355.00	350.60	351.00	350.70	347.90
178.5	354.80	350.90	351.00	350.80	348.00
179.0	355.50	351.00	350.90	351.20	348.20
179.5	355.30	350.90	350.90	351.00	348.10
180.0	351.20	351.20	351.20	351.20	351.20

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-1012-UNVE88-D35S-LG.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	0.00	N.A.	0.00
0-30	0.00	N.A.	0.00
0-40	0.00	N.A.	0.00
0-60	0.00	N.A.	0.00
0-80	0.07	N.A.	0.00
0-90	2.88	N.A.	0.30
10-90	2.88	N.A.	0.30
20-40	0.00	N.A.	0.00
20-50	0.00	N.A.	0.00
40-70	0.00	N.A.	0.00
60-80	0.07	N.A.	0.00
70-80	0.07	N.A.	0.00
80-90	2.81	N.A.	0.30
90-110	73.70	N.A.	7.50
90-120	185.46	N.A.	18.90
90-130	344.83	N.A.	35.10
90-150	703.44	N.A.	71.70
90-180	978.36	N.A.	99.70
110-180	904.66	N.A.	92.20
0-180	981.23	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	0.00
10-20	0.00
20-30	0.00
30-40	0.00
40-50	0.00
50-60	0.00
60-70	0.00
70-80	0.07
80-90	2.81
90-100	17.42
100-110	56.28
110-120	111.76
120-130	159.36
130-140	181.79
140-150	176.83
150-160	146.06
160-170	95.62
170-180	33.24


IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-1012-UNVE88-D35S-LG.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	
0	95	95	95	95	82	82	82	82	56	56	56	32	32	32	10	10	10	0
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	9	0
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7	0
3	72	63	56	51	61	54	49	44	37	34	31	21	20	18	7	6	6	0
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	0
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4	0
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4	0
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3	0
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	0
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3	0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	0

POLAR GRAPH

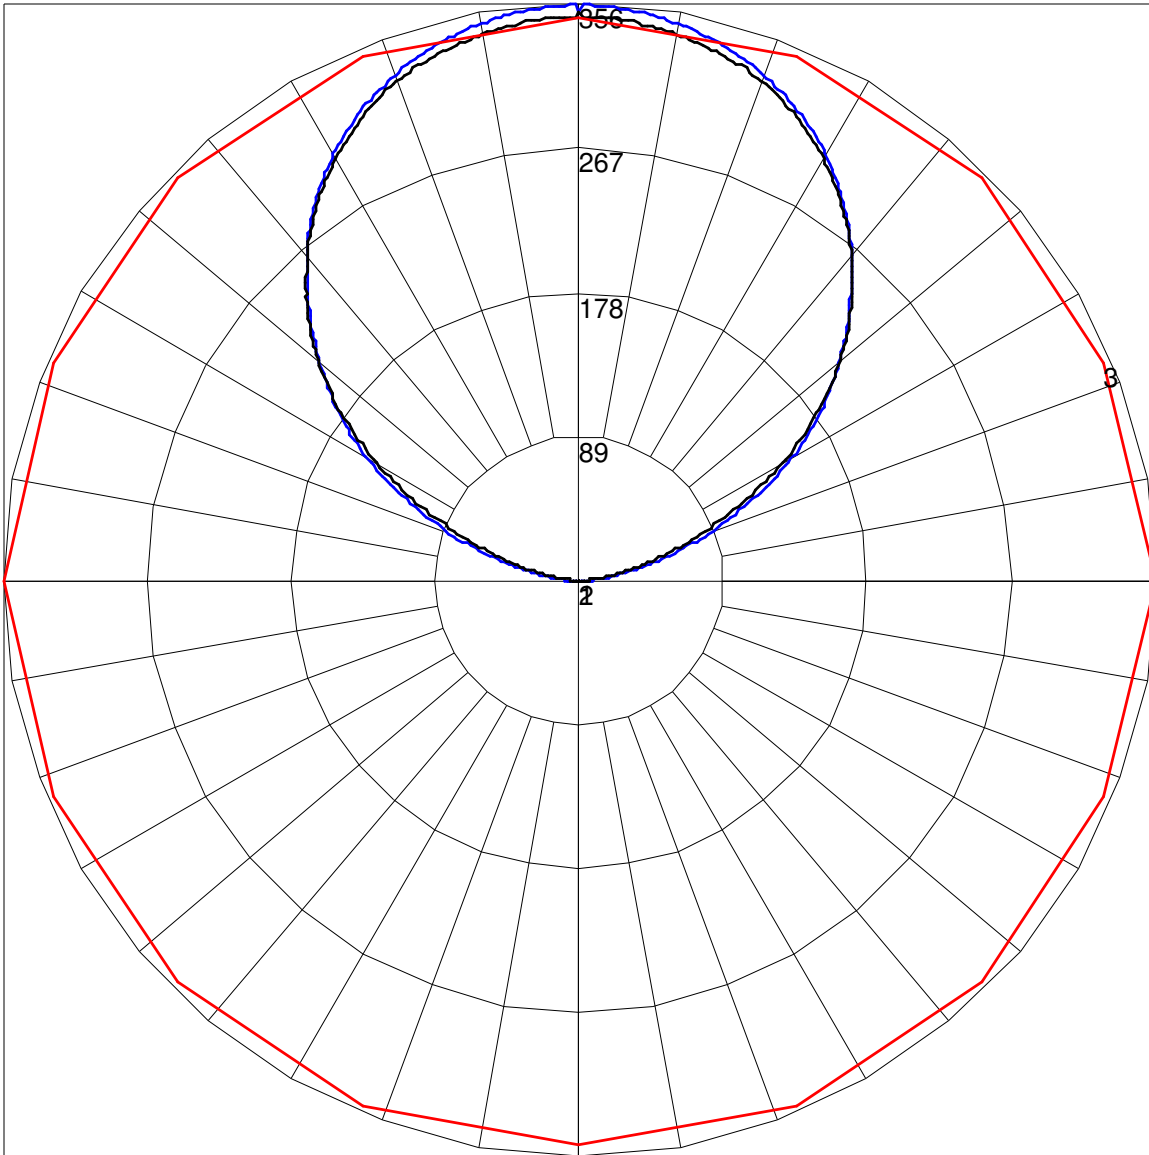

Maximum Candela = 355.5 Located At Horizontal Angle = 0, Vertical Angle = 179
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Vertical Plane Through Horizontal Angles (90 - 270)
3 - Horizontal Cone Through Vertical Angle (179) (Through Max. Cd.)