

IES INDOOR REPORT PHOTOMETRIC FILENAME : C6S00-12-7612-UNVE88-D35S-LG.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] 11750395.13
[ECN] 3074
[TESTLAB] UL Verification Services Inc.
[ISSUEDATE] 5/5/2017
[MANUFAC] Tempo Industries Inc
[LUMCAT] C6S00-12-7612-UNVE88-D35S-LG
[LUMINAIRE] Gray metal mounting bracket with gray housing and diffuse
[MORE] plastic lens
[LAMP] 20 White LEDs
[BALLAST] Magtech M18-U18-500
[OTHER] 25.2 C, 120.056 V, 0.0753913 A, 8.99332 W, 0.993606 PF, 59.998
[MORE] 3 Hz
[OTHER] This test was performed using the calibrated photodetector met
[MORE] hod of absolute photometry.

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	772
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	86
Total Luminaire Watts	8.99332
Ballast Factor	1.00
CIE Type	Indirect
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.15 ft
Luminous Width (90-270)	1.00 ft
Luminous Height	0.07 ft



IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-7612-UNVE88-D35S-LG.IES

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	0	6	193
55	68	51	317
65	190	128	493
75	400	288	760
85	751	710	696

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-7612-UNVE88-D35S-LG.IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>
0.0	0.00	0.00	0.00	0.00	0.00
0.5	0.00	0.00	0.00	0.00	0.00
1.0	0.00	0.00	0.00	0.00	0.00
1.5	0.00	0.00	0.00	0.00	0.00
2.0	0.00	0.00	0.00	0.00	0.00
2.5	0.00	0.00	0.00	0.00	0.00
3.0	0.00	0.00	0.00	0.00	0.00
3.5	0.00	0.00	0.00	0.00	0.00
4.0	0.00	0.00	0.00	0.00	0.00
4.5	0.00	0.00	0.00	0.00	0.00
5.0	0.00	0.00	0.00	0.00	0.00
5.5	0.00	0.00	0.00	0.00	0.00
6.0	0.00	0.00	0.00	0.00	0.00
6.5	0.00	0.00	0.00	0.00	0.00
7.0	0.00	0.00	0.00	0.00	0.00
7.5	0.00	0.00	0.00	0.00	0.00
8.0	0.00	0.00	0.00	0.00	0.00
8.5	0.00	0.00	0.00	0.00	0.00
9.0	0.00	0.00	0.00	0.00	0.00
9.5	0.00	0.00	0.00	0.00	0.00
10.0	0.00	0.00	0.00	0.00	0.00
10.5	0.00	0.00	0.00	0.00	0.00
11.0	0.00	0.00	0.00	0.00	0.00
11.5	0.00	0.00	0.00	0.00	0.00
12.0	0.00	0.00	0.00	0.04	0.14
12.5	0.00	0.00	0.00	0.08	0.19
13.0	0.00	0.00	0.00	0.09	0.18
13.5	0.00	0.00	0.00	0.09	0.18
14.0	0.00	0.00	0.00	0.10	0.18
14.5	0.00	0.00	0.00	0.10	0.18
15.0	0.00	0.00	0.00	0.11	0.20
15.5	0.00	0.00	0.00	0.18	0.29
16.0	0.00	0.00	0.00	0.23	0.34
16.5	0.00	0.00	0.00	0.24	0.32
17.0	0.00	0.00	0.00	0.22	0.31
17.5	0.00	0.00	0.00	0.22	0.32
18.0	0.00	0.00	0.00	0.22	0.36
18.5	0.00	0.00	0.00	0.34	0.49
19.0	0.00	0.00	0.00	0.38	0.48
19.5	0.00	0.00	0.00	0.34	0.46
20.0	0.00	0.00	0.00	0.29	0.46
20.5	0.00	0.00	0.00	0.31	0.51
21.0	0.00	0.00	0.00	0.36	0.53
21.5	0.00	0.00	0.00	0.41	0.58
22.0	0.00	0.00	0.00	0.46	0.63
22.5	0.00	0.00	0.00	0.49	0.69
23.0	0.00	0.00	0.00	0.48	0.72
23.5	0.00	0.00	0.00	0.47	0.73
24.0	0.00	0.00	0.01	0.46	0.76
24.5	0.00	0.00	0.02	0.52	0.80
25.0	0.00	0.00	0.06	0.59	0.88
25.5	0.00	0.00	0.07	0.66	0.97
26.0	0.00	0.00	0.07	0.69	1.04
26.5	0.00	0.00	0.08	0.72	1.11

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-7612-UNVE88-D35S-LG.IES

CANDELA TABULATION - (Cont.)

27.0	0.00	0.00	0.06	0.73	1.12
27.5	0.00	0.00	0.06	0.74	1.13
28.0	0.00	0.00	0.06	0.80	1.16
28.5	0.00	0.00	0.06	0.86	1.21
29.0	0.00	0.00	0.07	0.88	1.24
29.5	0.00	0.00	0.09	0.90	1.27
30.0	0.00	0.00	0.08	0.91	1.29
30.5	0.00	0.00	0.08	0.89	1.26
31.0	0.00	0.00	0.06	0.91	1.30
31.5	0.00	0.00	0.07	0.92	1.32
32.0	0.00	0.00	0.08	0.96	1.37
32.5	0.00	0.00	0.11	1.00	1.44
33.0	0.00	0.00	0.12	1.02	1.47
33.5	0.00	0.00	0.12	1.00	1.50
34.0	0.00	0.00	0.11	1.00	1.52
34.5	0.00	0.00	0.13	1.02	1.57
35.0	0.00	0.00	0.12	1.03	1.58
35.5	0.00	0.00	0.14	1.07	1.64
36.0	0.00	0.00	0.15	1.07	1.67
36.5	0.00	0.00	0.15	1.07	1.68
37.0	0.00	0.00	0.15	1.06	1.69
37.5	0.00	0.00	0.17	1.08	1.70
38.0	0.00	0.00	0.18	1.07	1.76
38.5	0.00	0.00	0.18	1.08	1.76
39.0	0.00	0.00	0.14	1.12	1.80
39.5	0.00	0.00	0.13	1.12	1.81
40.0	0.00	0.00	0.12	1.12	1.82
40.5	0.00	0.00	0.10	1.13	1.83
41.0	0.00	0.00	0.10	1.14	1.83
41.5	0.00	0.00	0.09	1.16	1.85
42.0	0.00	0.00	0.09	1.17	1.87
42.5	0.00	0.00	0.09	1.17	1.89
43.0	0.00	0.00	0.09	1.17	1.91
43.5	0.00	0.00	0.08	1.18	1.92
44.0	0.00	0.00	0.09	1.17	1.93
44.5	0.00	0.00	0.08	1.18	1.96
45.0	0.00	0.00	0.08	1.17	1.99
45.5	0.00	0.00	0.08	1.18	2.01
46.0	0.00	0.00	0.09	1.18	2.04
46.5	0.00	0.01	0.09	1.18	2.08
47.0	0.00	0.01	0.10	1.18	2.10
47.5	0.01	0.03	0.15	1.18	2.15
48.0	0.05	0.07	0.16	1.18	2.18
48.5	0.12	0.12	0.19	1.19	2.21
49.0	0.18	0.18	0.23	1.19	2.26
49.5	0.24	0.23	0.26	1.20	2.31
50.0	0.30	0.28	0.29	1.20	2.33
50.5	0.36	0.35	0.33	1.20	2.39
51.0	0.41	0.40	0.36	1.21	2.42
51.5	0.48	0.46	0.39	1.21	2.45
52.0	0.54	0.51	0.42	1.22	2.50
52.5	0.60	0.56	0.45	1.24	2.53
53.0	0.65	0.62	0.49	1.25	2.56
53.5	0.71	0.67	0.52	1.25	2.60
54.0	0.78	0.73	0.56	1.26	2.64
54.5	0.84	0.78	0.59	1.27	2.67

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-7612-UNVE88-D35S-LG.IES

CANDELA TABULATION - (Cont.)

55.0	0.91	0.85	0.63	1.28	2.73
55.5	0.96	0.90	0.65	1.27	2.76
56.0	1.03	0.96	0.69	1.28	2.79
56.5	1.09	1.01	0.72	1.28	2.81
57.0	1.16	1.07	0.76	1.28	2.84
57.5	1.22	1.13	0.79	1.27	2.86
58.0	1.28	1.19	0.83	1.28	2.90
58.5	1.35	1.25	0.86	1.27	2.93
59.0	1.43	1.30	0.89	1.26	2.95
59.5	1.49	1.37	0.94	1.25	2.99
60.0	1.56	1.43	0.98	1.25	3.04
60.5	1.64	1.49	1.02	1.24	3.07
61.0	1.71	1.54	1.06	1.22	3.10
61.5	1.77	1.61	1.10	1.21	3.13
62.0	1.84	1.67	1.13	1.19	3.15
62.5	1.91	1.72	1.17	1.18	3.18
63.0	1.99	1.78	1.21	1.18	3.21
63.5	2.06	1.85	1.25	1.18	3.22
64.0	2.13	1.91	1.29	1.17	3.23
64.5	2.19	1.97	1.33	1.17	3.25
65.0	2.26	2.04	1.37	1.17	3.27
65.5	2.36	2.10	1.42	1.16	3.29
66.0	2.43	2.16	1.47	1.15	3.31
66.5	2.50	2.24	1.51	1.15	3.31
67.0	2.59	2.30	1.57	1.16	3.33
67.5	2.66	2.38	1.61	1.15	3.34
68.0	2.76	2.45	1.66	1.16	3.36
68.5	2.84	2.51	1.71	1.16	3.36
69.0	2.91	2.59	1.77	1.16	3.35
69.5	2.99	2.66	1.81	1.16	3.36
70.0	3.08	2.73	1.87	1.17	3.38
70.5	3.16	2.80	1.93	1.17	3.40
71.0	3.25	2.88	1.99	1.17	3.42
71.5	3.35	2.95	2.05	1.18	3.42
72.0	3.44	3.04	2.11	1.18	3.44
72.5	3.53	3.13	2.18	1.18	3.44
73.0	3.64	3.20	2.25	1.19	3.44
73.5	3.72	3.28	2.32	1.20	3.43
74.0	3.82	3.37	2.39	1.21	3.42
74.5	3.92	3.45	2.46	1.22	3.40
75.0	4.03	3.53	2.54	1.24	3.40
75.5	4.12	3.63	2.62	1.26	3.37
76.0	4.23	3.72	2.70	1.28	3.36
76.5	4.32	3.81	2.78	1.31	3.35
77.0	4.42	3.90	2.87	1.33	3.33
77.5	4.53	3.99	2.96	1.37	3.33
78.0	4.62	4.09	3.05	1.41	3.33
78.5	4.72	4.18	3.15	1.45	3.30
79.0	4.83	4.28	3.26	1.49	3.27
79.5	4.94	4.37	3.36	1.54	3.21
80.0	5.03	4.47	3.46	1.60	3.13
80.5	5.15	4.57	3.57	1.65	3.04
81.0	5.22	4.66	3.69	1.72	2.93
81.5	5.32	4.77	3.81	1.79	2.80
82.0	5.43	4.86	3.93	1.86	2.65
82.5	5.52	4.97	4.05	1.95	2.48

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-7612-UNVE88-D35S-LG.IES

CANDELA TABULATION - (Cont.)

83.0	5.62	5.07	4.18	2.05	2.24
83.5	5.70	5.17	4.30	2.16	2.05
84.0	5.79	5.28	4.45	2.27	1.88
84.5	5.88	5.38	4.58	2.40	1.69
85.0	5.97	5.49	4.73	2.53	1.51
85.5	6.07	5.60	4.88	2.68	1.35
86.0	6.13	5.69	5.04	2.85	1.21
86.5	6.22	5.81	5.20	3.04	1.07
87.0	6.29	5.92	5.35	3.25	0.97
87.5	6.38	6.02	5.54	3.47	0.88
88.0	6.46	6.13	5.71	3.71	0.83
88.5	6.54	6.24	5.89	3.98	0.80
89.0	6.60	6.35	6.08	4.24	0.79
89.5	6.67	6.44	6.26	4.58	0.89
90.0	6.74	6.56	6.46	4.90	1.11
90.5	6.79	6.68	6.66	5.23	1.40
91.0	6.86	6.78	6.87	5.62	1.78
91.5	6.92	6.90	7.09	6.02	2.29
92.0	6.99	7.00	7.32	6.44	2.92
92.5	7.06	7.12	7.56	6.89	3.69
93.0	7.11	7.23	7.80	7.37	4.60
93.5	7.18	7.34	8.05	7.88	5.62
94.0	7.24	7.46	8.30	8.41	6.72
94.5	7.28	7.58	8.56	8.99	7.89
95.0	7.35	7.70	8.83	9.55	9.15
95.5	7.41	7.84	9.12	10.17	10.45
96.0	7.50	7.97	9.38	10.84	11.89
96.5	7.56	8.09	9.69	11.50	13.38
97.0	7.64	8.21	10.00	12.24	14.87
97.5	7.72	8.36	10.30	12.99	16.46
98.0	7.79	8.52	10.64	13.74	18.13
98.5	7.86	8.67	10.99	14.53	19.81
99.0	7.96	8.83	11.35	15.37	21.51
99.5	8.06	8.99	11.69	16.23	23.27
100.0	8.15	9.16	12.06	17.10	25.00
100.5	8.29	9.35	12.46	18.04	26.82
101.0	8.42	9.52	12.86	18.93	28.75
101.5	8.52	9.72	13.28	19.94	30.62
102.0	8.69	9.91	13.71	20.92	32.51
102.5	8.82	10.14	14.18	21.95	34.50
103.0	8.99	10.37	14.64	22.98	36.48
103.5	9.15	10.61	15.11	24.08	38.50
104.0	9.36	10.86	15.61	25.16	40.60
104.5	9.56	11.12	16.15	26.24	42.57
105.0	9.76	11.41	16.69	27.40	44.64
105.5	9.99	11.73	17.26	28.58	46.70
106.0	10.23	12.04	17.82	29.77	48.77
106.5	10.49	12.37	18.43	30.99	50.79
107.0	10.80	12.71	19.04	32.22	52.93
107.5	11.07	13.10	19.67	33.46	55.01
108.0	11.42	13.49	20.31	34.69	57.24
108.5	11.76	13.90	20.99	36.01	59.40
109.0	12.09	14.32	21.73	37.27	61.66
109.5	12.48	14.77	22.44	38.65	63.74
110.0	12.90	15.23	23.15	39.96	65.73
110.5	13.27	15.72	23.96	41.37	67.96

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-7612-UNVE88-D35S-LG.IES

CANDELA TABULATION - (Cont.)

111.0	13.71	16.24	24.74	42.74	70.05
111.5	14.18	16.76	25.56	44.25	72.12
112.0	14.64	17.34	26.40	45.74	74.20
112.5	15.12	17.91	27.25	47.26	76.18
113.0	15.62	18.50	28.16	48.71	78.18
113.5	16.20	19.12	29.07	50.28	80.21
114.0	16.78	19.73	30.03	51.91	82.36
114.5	17.33	20.43	31.03	53.58	84.45
115.0	17.87	21.13	32.07	55.14	86.70
115.5	18.49	21.84	33.14	56.96	88.72
116.0	19.12	22.62	34.23	58.73	90.91
116.5	19.79	23.34	35.43	60.53	92.61
117.0	20.45	24.14	36.58	62.39	95.15
117.5	21.12	25.04	37.77	64.23	97.13
118.0	21.89	25.78	39.01	66.19	99.25
118.5	22.71	26.80	40.39	68.21	101.40
119.0	23.49	27.70	41.73	70.31	103.80
119.5	24.22	28.53	43.04	72.31	106.00
120.0	25.10	29.49	44.50	74.58	108.30
120.5	25.93	30.58	46.08	76.77	110.70
121.0	26.87	31.55	47.71	78.94	113.40
121.5	27.85	32.64	49.21	81.33	115.90
122.0	28.79	33.85	50.96	83.74	118.40
122.5	29.79	35.00	52.64	86.07	121.00
123.0	30.82	36.25	54.43	88.69	123.60
123.5	31.95	37.48	56.31	91.29	126.70
124.0	33.10	38.85	58.22	94.18	129.20
124.5	34.26	40.30	60.23	96.92	131.90
125.0	35.52	41.75	62.30	99.62	135.00
125.5	36.90	43.20	64.50	102.60	138.00
126.0	38.21	44.80	66.80	105.70	141.20
126.5	39.66	46.53	69.20	109.00	144.20
127.0	41.19	48.30	71.53	112.20	147.50
127.5	42.70	50.10	74.18	115.50	150.80
128.0	44.36	51.93	76.84	119.00	154.40
128.5	46.07	54.01	79.55	122.60	157.80
129.0	47.86	56.05	82.46	126.50	161.30
129.5	49.79	58.20	85.21	130.30	164.80
130.0	51.81	60.52	88.41	134.20	168.30
130.5	53.87	62.86	91.74	138.40	172.00
131.0	56.03	65.43	95.06	142.50	176.00
131.5	58.24	67.98	98.51	146.90	179.90
132.0	60.71	70.65	102.00	151.30	184.40
132.5	63.29	73.56	105.80	155.60	188.80
133.0	65.89	76.39	109.70	160.40	192.40
133.5	68.65	79.57	113.70	165.20	196.60
134.0	71.68	82.67	117.90	170.40	201.10
134.5	74.69	86.07	122.30	175.40	205.80
135.0	77.96	89.62	126.70	180.80	210.50
135.5	81.42	93.30	131.60	186.20	215.50
136.0	84.89	97.12	136.50	191.80	219.90
136.5	88.37	101.20	141.70	197.40	225.10
137.0	91.97	105.40	146.90	202.90	230.10
137.5	96.03	109.60	152.00	209.00	235.10
138.0	100.20	114.10	157.70	214.80	240.00
138.5	104.80	119.00	163.30	220.90	245.50

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-7612-UNVE88-D35S-LG.IES

CANDELA TABULATION - (Cont.)

139.0	109.20	123.80	169.40	227.20	251.20
139.5	113.80	129.00	175.40	233.00	256.30
140.0	118.60	134.30	181.80	239.50	261.80
140.5	123.70	139.50	187.90	245.60	267.00
141.0	129.00	145.30	194.50	251.90	272.20
141.5	134.70	151.30	201.10	258.40	278.30
142.0	140.40	157.80	207.70	265.00	283.60
142.5	146.40	164.20	215.00	271.80	289.50
143.0	152.50	170.30	221.80	278.10	295.20
143.5	158.60	177.10	229.30	284.80	300.60
144.0	165.50	183.80	236.00	291.70	306.50
144.5	172.10	190.80	243.40	298.20	311.90
145.0	179.20	198.20	251.10	304.80	317.70
145.5	186.90	205.40	258.70	311.20	322.60
146.0	194.30	213.10	266.50	317.80	328.20
146.5	201.50	221.00	274.20	324.10	333.80
147.0	209.50	228.80	281.40	330.30	339.70
147.5	217.30	236.60	289.40	336.70	344.20
148.0	225.70	244.90	297.50	343.50	349.70
148.5	234.10	253.30	305.40	349.20	354.90
149.0	242.80	261.60	312.30	355.50	359.90
149.5	251.90	270.30	320.40	361.70	365.30
150.0	261.00	279.10	328.30	367.40	370.30
150.5	269.40	288.00	335.80	373.40	374.40
151.0	278.70	296.50	343.80	378.90	379.30
151.5	287.80	305.30	351.40	384.90	384.00
152.0	297.30	313.90	359.10	389.90	389.40
152.5	306.70	323.20	366.20	395.30	392.80
153.0	315.60	331.60	373.10	400.30	397.50
153.5	325.50	340.00	380.30	404.90	401.90
154.0	334.50	348.60	387.20	410.50	406.00
154.5	343.30	357.40	393.50	415.20	409.50
155.0	352.50	365.50	400.50	419.40	413.00
155.5	361.30	373.90	406.40	424.00	417.00
156.0	369.40	382.00	412.70	428.00	420.70
156.5	378.70	389.50	417.90	432.10	424.20
157.0	387.40	397.10	424.30	436.40	428.00
157.5	395.50	404.80	430.40	439.80	432.50
158.0	403.10	412.10	435.30	443.10	434.80
158.5	411.20	419.30	440.10	447.00	437.60
159.0	419.40	426.30	445.40	450.30	441.00
159.5	427.50	432.90	450.00	453.20	444.40
160.0	434.20	439.20	454.80	456.10	447.40
160.5	441.40	445.20	458.60	458.90	449.80
161.0	447.70	451.40	463.10	462.10	452.50
161.5	453.70	456.40	466.50	464.70	454.10
162.0	459.20	461.60	470.20	467.20	457.00
162.5	465.30	466.20	473.30	469.70	458.00
163.0	470.90	470.30	476.30	472.40	461.60
163.5	475.70	474.20	479.60	474.50	463.60
164.0	480.80	478.60	481.70	475.60	466.70
164.5	484.40	482.50	484.60	477.50	467.80
165.0	488.40	485.90	486.20	479.00	469.00
165.5	491.40	489.10	488.40	481.00	471.30
166.0	494.90	492.50	490.40	482.30	472.80
166.5	498.00	493.70	492.90	484.20	474.40

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-7612-UNVE88-D35S-LG.IES

CANDELA TABULATION - (Cont.)

167.0	501.10	496.40	494.20	485.40	476.20
167.5	503.30	497.60	495.20	486.20	476.50
168.0	505.30	499.70	496.20	487.50	478.60
168.5	507.10	501.00	497.20	489.10	479.90
169.0	508.90	502.40	497.60	490.40	481.90
169.5	508.10	503.50	498.90	490.80	482.10
170.0	509.20	504.20	498.80	491.80	484.00
170.5	510.50	504.70	499.80	492.60	485.70
171.0	510.90	504.90	499.90	492.80	485.60
171.5	511.80	505.50	500.50	493.80	487.90
172.0	511.60	504.80	501.10	494.50	488.30
172.5	510.40	504.90	501.30	494.40	490.10
173.0	511.40	504.50	500.90	495.30	491.10
173.5	510.10	504.00	501.20	496.00	491.20
174.0	509.20	504.20	500.70	496.90	491.50
174.5	508.60	503.60	500.20	497.30	493.20
175.0	508.70	503.60	499.70	496.80	494.00
175.5	507.90	503.10	499.60	497.20	494.00
176.0	506.20	502.00	499.90	497.60	493.50
176.5	507.00	501.30	499.60	497.70	494.10
177.0	505.90	500.80	499.70	498.40	495.20
177.5	505.50	500.40	499.20	497.70	495.40
178.0	505.50	500.30	499.30	498.00	495.90
178.5	505.20	500.30	499.10	498.50	496.00
179.0	504.60	500.40	499.60	497.90	495.90
179.5	503.80	499.20	499.40	498.90	495.10
180.0	499.70	499.70	499.70	499.70	499.70

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-7612-UNVE88-D35S-LG.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	0.02	N.A.	0.00
0-30	0.15	N.A.	0.00
0-40	0.46	N.A.	0.10
0-60	1.94	N.A.	0.30
0-80	6.73	N.A.	0.90
0-90	11.34	N.A.	1.50
10-90	11.34	N.A.	1.50
20-40	0.44	N.A.	0.10
20-50	0.90	N.A.	0.10
40-70	3.32	N.A.	0.40
60-80	4.79	N.A.	0.60
70-80	2.95	N.A.	0.40
80-90	4.61	N.A.	0.60
90-110	31.86	N.A.	4.10
90-120	72.04	N.A.	9.30
90-130	137.62	N.A.	17.80
90-150	399.73	N.A.	51.70
90-180	761.12	N.A.	98.50
110-180	729.26	N.A.	94.40
0-180	772.46	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	0.00
10-20	0.02
20-30	0.13
30-40	0.31
40-50	0.46
50-60	1.02
60-70	1.84
70-80	2.95
80-90	4.61
90-100	9.72
100-110	22.13
110-120	40.19
120-130	65.58
130-140	105.68
140-150	156.43
150-160	178.56
160-170	135.12
170-180	47.71


IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6S00-12-7612-UNVE88-D35S-LG.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	
0	96	96	96	96	82	82	82	82	56	56	56	33	33	33	12	12	12	1
1	87	83	79	76	74	71	68	65	49	47	45	28	27	27	10	9	9	1
2	79	72	66	61	67	62	57	53	42	40	37	25	23	22	8	8	7	0
3	72	63	56	51	61	54	49	44	37	34	31	22	20	18	7	7	6	0
4	65	55	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	0
5	60	49	42	36	51	42	36	31	29	25	22	17	15	13	6	5	4	0
6	55	44	36	31	47	38	31	27	26	22	19	15	13	11	5	4	4	0
7	50	39	32	27	43	34	28	23	23	19	16	14	11	10	5	4	3	0
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	0
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3	0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	0

POLAR GRAPH

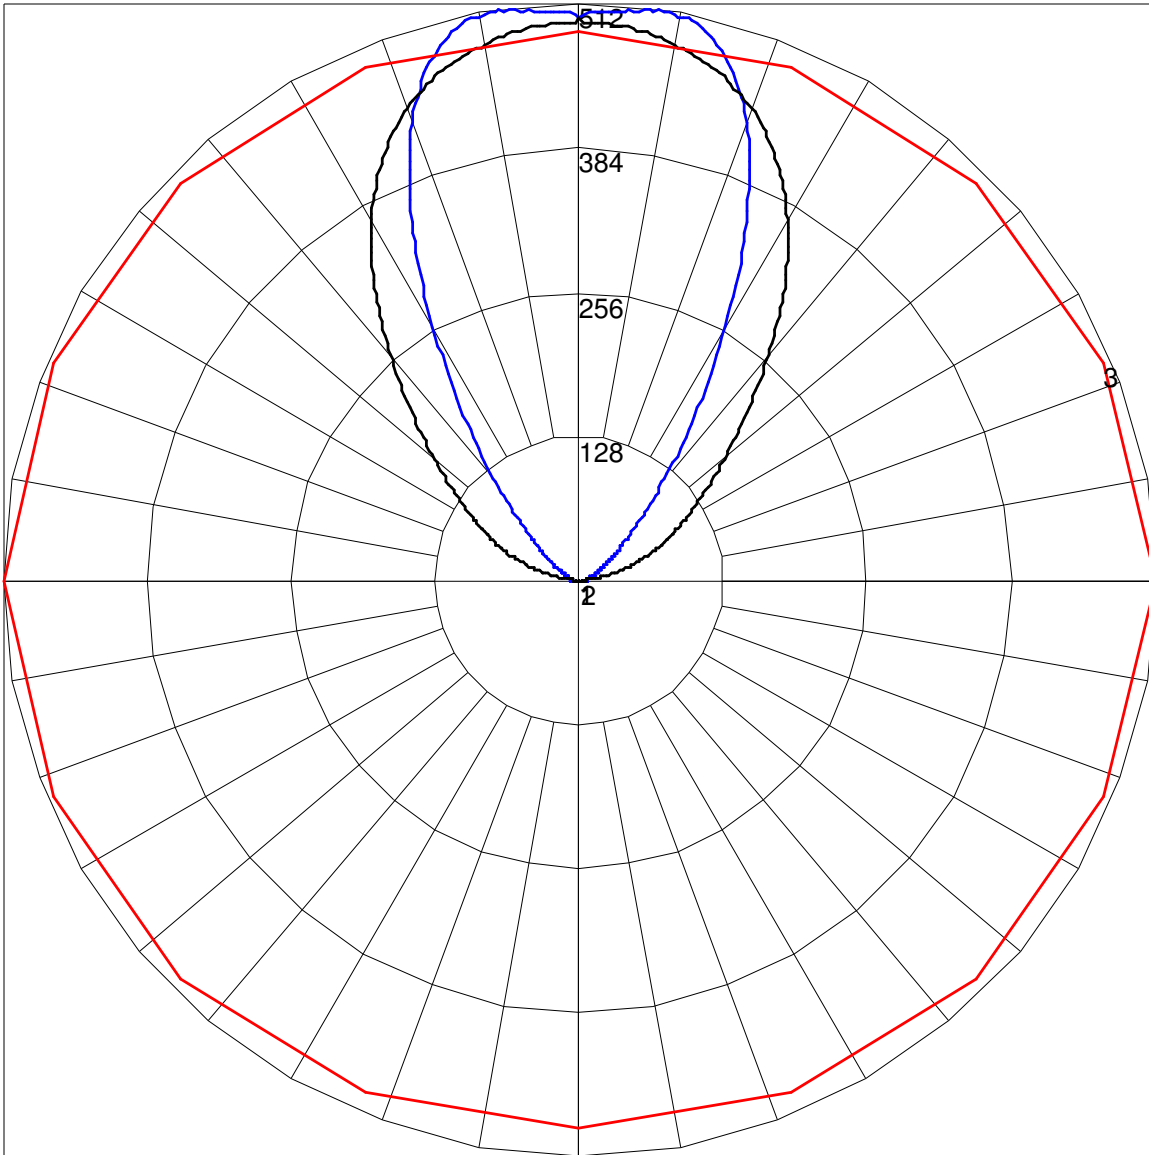

Maximum Candela = 511.8 Located At Horizontal Angle = 0, Vertical Angle = 171.5

1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

2 - Vertical Plane Through Horizontal Angles (90 - 270)

3 - Horizontal Cone Through Vertical Angle (171.5) (Through Max. Cd.)