

## C4R Next Gen

RIGID LED LINEAR COVE LIGHTING, MID-POWER  
24V REMOTE POWER SYSTEM



### APPLICATION

Next Generation C4R LED linear lighting produces uniform illumination designed to accent and highlight small spaces such as coves and soffits. Dense pack LEDs provides increased lumens per watt and uniform light pattern compared with the legacy C4R design. Designed with modular CLiP<sup>®</sup> (Configurable Lighting Platform), C4R provides options to suit multiple application requirements.

### CONSTRUCTION

- Thermally optimized die cast aluminum housing
- 12" modules
- Sections quick connect together to form extended runs
- Easily replaceable LED arrays
- CSA damp location listed

### OPTICS / LENS / DIFFUSER

- Low Profile, lightly frosted lens

### POWER SYSTEM

- Utilizes remote, low voltage (24V) DC power supply
- Dimming options available

### PERFORMANCE

- Dense Pack LEDs for high uniformity
- Operating temperature range of -20°C to 50°C
- Rated for a minimum of 86,000 hours (L85) at 25°C ambient operating temperature
- Power Supply Total Harmonic Distortion <20%, Power Factor >0.9

### LIGHT CHARACTERISTICS

- Typical CRI of 80+ in 2700K, 3000K, 3500K, 4000K.
- 90+ CRI option available with 2700K, 3000K and 3500K
- LED's are selected and placed on the printed circuit boards via Tempo Industries' UniBin™ process which ensures consistent hue and color within the entire run. Color variations are held to a minimum, within a 2-step MacAdam ellipse.



### WARRANTY

Tempo provides a 5-year limited warranty.

### PERFORMANCE SUMMARY All data nominal. 3000K test data shown.

Watts/ft	5.2
Lumens/ft	635
Lumens/Watt	122

## C4R Next Gen

RIGID LED LINEAR COVE LIGHTING, MID-POWER  
24V REMOTE POWER SYSTEM


### ORDERING INFORMATION

	C4	R	0	0	12	30	06	52	DP			
Length in Feet <sup>1</sup>	PLATFORM				PERFORMANCE				LIGHT CHARACTERISTICS			
	Se-ries	Plat-form	Profile	Type	Increment Length	Optic/Lens/Diffuser	Module Spacing	Watts/ft	LED Spacing	Color Temp	Attribute	Finish
	C4	R Rigid	0 Rect.	0 Symmetric	12 12" base increment	30 Low Profile Lightly Frosted	12 12" O.C.	52 5.2	DP Dense Pack	27 2700K 30 3000K 35 3500K 40 4000K RD Red GR Green BL Blue	S Standard UniBin  C High CRI (90+) 2700K, 3000K, 3500K only	NA Natural Anodized (Std.)  SPL Special Color - Consult Factory

NOTES:

(1) Total ordered length may be specified in 0.5ft increments (EXAMPLE 27.5ft). Unless otherwise specified, Tempo will determine the section lengths of shipped product to comprise the total length, up to a maximum section length of 8ft (EXAMPLE: 30ft of ordered product may ship as (6) 5ft sections or (3) 8ft and (1) 6ft section, etc.)

### DIMENSIONAL INFORMATION

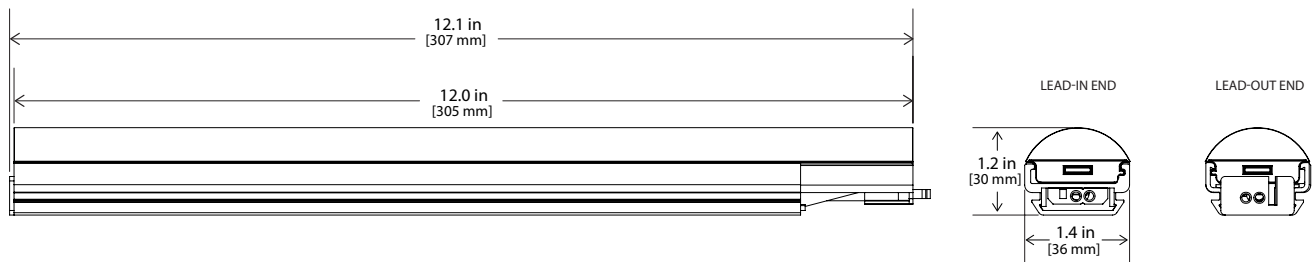

## C4R Next Gen

RIGID LED LINEAR COVE LIGHTING, MID-POWER  
24V REMOTE POWER SYSTEM

### SYSTEM INTEGRATION ACCESSORIES

POWER SUPPLIES - 24V Output		
Require approved enclosure (by others) in close proximity to luminaire. Consult factory for guidance.		
	<b>PWR-120-EM-040-T</b>	120V AC Input, 24V DC Output, 40W, Triac Dimming Lutron Hi-lume 1% 2-wire LED driver (120V forward phase) -LTEA2W
	<b>PWR-UNV-EM-060</b>	120-277V AC Input, 24V DC Output, 60W, Non-Dimming
	<b>PWR-UNV-EM-060-Z</b>	120-277V AC Input, 24V DC Output, 60W, 0-10V Dimming
	<b>PWR-UNV-EM-100</b>	120-277V AC Input, 24V DC Output, 100W, Non-Dimming

SURGE SUPPRESSION DEVICE		
A Tempo furnished surge suppression device must be installed on each supplying branch circuit to comply with Tempo's 5-year warranty terms		
	<b>SSD-120</b>	120V Branch Circuit
	<b>SSD-277</b>	277V Branch Circuit

POWER FEED CABLES Additional lengths available, contact factory		
	<b>PFC3-F-24-36</b>	Female Connector, 24V, 36 inches
	<b>PFC3-M-24-36</b>	Male Connector, 24V 36 inches

JUMPER FEED CABLES Additional lengths available, contact factory		
	<b>JFC3-FF-24-18</b>	Female/Female Connector, 24V, 18 inches
	<b>JFC3-MF-24-18</b>	Male/Female, 24V, 18 inches
	<b>JFC3-MM-24-18</b>	Male/Male, 24V, 18 inches


  

MOUNTING HARDWARE		
	<b>C4A-MTGBRKT-SURF</b>	Surface Mount Bracket with Screw Ears (set of 12)
	<b>C4A-MTGBRKT-COVE</b>	Front Cove Mount (set of 12)
	<b>C4A-MTGBRKT-WALL</b>	Wall Mount Bracket (set of 12)
	<b>C4A-MTGBRKT</b>	Surface Mount Bracket (set of 12)
	<b>C4A-MTGBRKT-1020</b>	Surface Mount Bracket with 10° or 20° angle (set of 12)
	<b>PA-5</b>	90°+ Adjustable Mount Bracket. Minimum of 2 required per section (set of 12)


## C4R Next Gen

RIGID LED LINEAR COVE LIGHTING, MID-POWER  
24V REMOTE POWER SYSTEM


### MOUNTING HARDWARE




SURFACE MOUNT  
(C4A-MTGBRKT)




SURFACE MOUNT W/  
SCREW MOUNTING EARS  
(C4A-MTGBRKT-SURF)






WALL MOUNT  
(C4A-MTGBRKT-WALL)






COVE MOUNT  
(C4A-MTGBRKT-COVE)

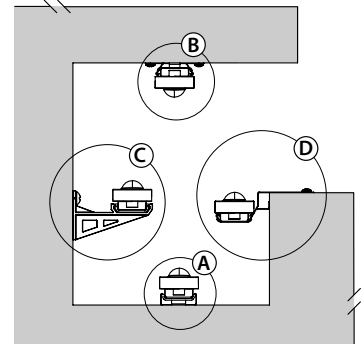

### SURFACE MOUNT BRACKET, 10° OR 20° ANGLE (C4A-MTGBRKT-1020)

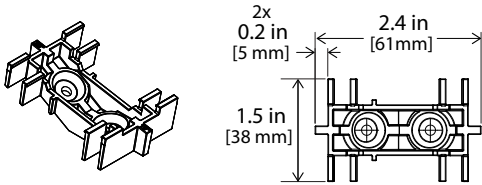

### ADJUSTABLE MOUNT BRACKET, 90°+ ANGLE (PA-5)

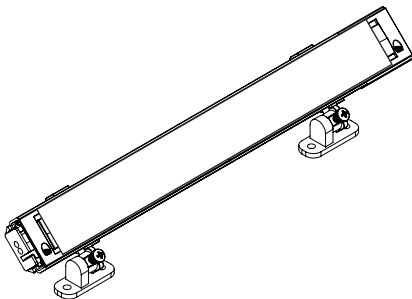

Tempo Industries reserves the right to change materials or modify the design of its product without notification as part of the company's continuing product improvement program. Please consult [www.tempollc.com](http://www.tempollc.com) for the most up-to-date specifications and technical data.